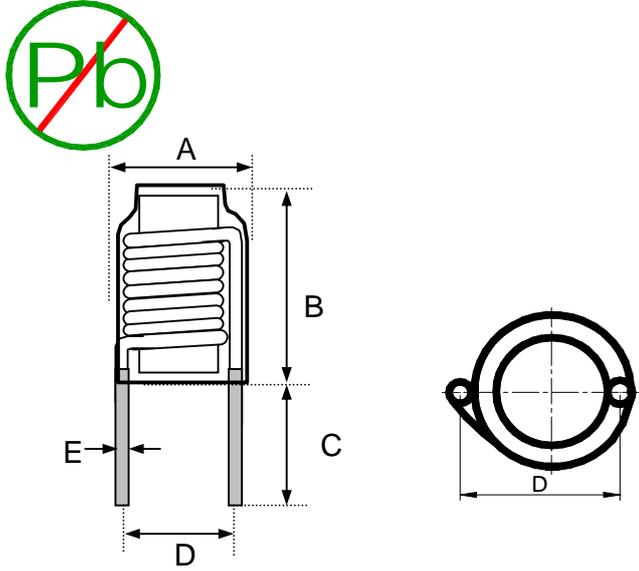


產品製作規格書

產品料號	398-95903	VER:0	產品名稱:	IPB0620N/1.0-17.5-4R7M			
圖面說明(單位:mm)			使用材料	注意事項			
			A	R 6x20	(無鉛)		
			B	Ø1.0mm(1PEW)	原色		
			C				
			D				
			E				
			F				
			尺寸 (mm)				
			A	12.0 (Max)	E	Ø1.0 ± 0.1	
			B	22.0 (Max)	F		
			C	3.5 ± 0.5	G		
D	8.5 ± 1.0	H					
	測試儀器	L (µH)	DCR Ω (Max)	IDC A(Max)	測試條件		
	TH2816B	4.7±20%	0.015	8.0	200KHz,0.25V		
客戶編碼	產品料號	送樣編號	修改項目	修改參數			
	398-95903	SZ09-01030					
包裝方式							
A	100	PCS/袋	D				
B	3	袋/盒	E				
C	10	盒/箱	F				
作業內容			修改記錄				
1.用R6x20的無鉛CORE.			時間	料號	修改內容		
2.用1PEWØ1.0mm的馬達線,繞17.5Ts(REF).			1				
或者用外調空芯線圈:Ø1.0x6.0x17.5 Ts.			2				
3.CORE與線圈點2021A.B膠固定.			3				
4.使用UL套管Ø9x22mm.			4				
5.上錫高度:平CORE以上0.5~2mm.			5				
6.生產以無鉛制程制作.			6				
			7				
			8				
注意事項			9				
1.可使用同等功能儀器測試.			備 注				
2.以感值為主,圈數為輔.			A	1pcs產品的重量: 5.9g			
3.產品L值按100%全測, DCR值按10%抽測.			B				
			C				
			D				
核準:_____			審核:_____	製表: 劉麗	發文日期: 2009.03.27		