



适应基板厚度: 1.2mm-1.6mm
温度范围: -25℃-85℃
额定电压: 250V AC/DC
额定电流: 2A
绝缘电阻: $\geq 1000M\Omega$
耐 压: 800V AC/minute

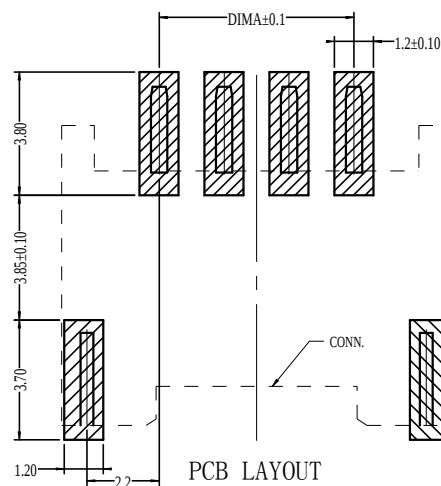

15P	28.0	30.9	34.0
14P	26.0	28.9	32.0
13P	24.0	26.9	30.0
12P	22.0	24.9	28.0
11P	20.0	22.9	26.0
10P	18.0	20.9	24.0
9P	16.0	18.9	22.0
8P	14.0	16.9	20.0
7P	12.0	14.9	18.0
6P	10.0	12.9	16.0
5P	8.0	10.9	14.0
4P	6.0	8.9	12.0
3P	4.0	6.9	10.0
2P	2.0	4.9	8.0
NUMBER OF PINS	DIM A	DIM B	DIM C

2011WRS-XXP	LCP UL94V-0	2011H	2011T
PART NO	Material	Suitable Housing	Suitable Terminal

3	PIN	2 PCS	材质:铜合金,电镀:镀亮锡60u"MIN
2	PIN	n PCS	材质:铜合金,电镀:镀亮锡60u"MIN
1	Housing	1 PCS	材质:LCP (UL94V-0) 本色或黑色
NO.	NAME	QTY	DESCRIPTION

_____		new		2015/5/3		A		瀚源	
ECN BO.		DESCRIPTION.		DATE.		REV.			
DESIGNED	CHECKED	APPROVAL	DRAWING NUMBER			SCALT: 1/2		SCALE: 3:1	
Mikey	Tom	Jerry	PART NAME	2011WRS-XXP	UNLESS OTHERWISE SPECIFIED,TOLERANCE:		X.	±0.25	
			MODEL NAME	H-2011WRS-XXP			X.x	±0.20	
			3RD ANGLE PROJ	HanElectricity Co.,LTD		X.xx	±0.15	ANGULAR	±3°
			FILE.NO.						