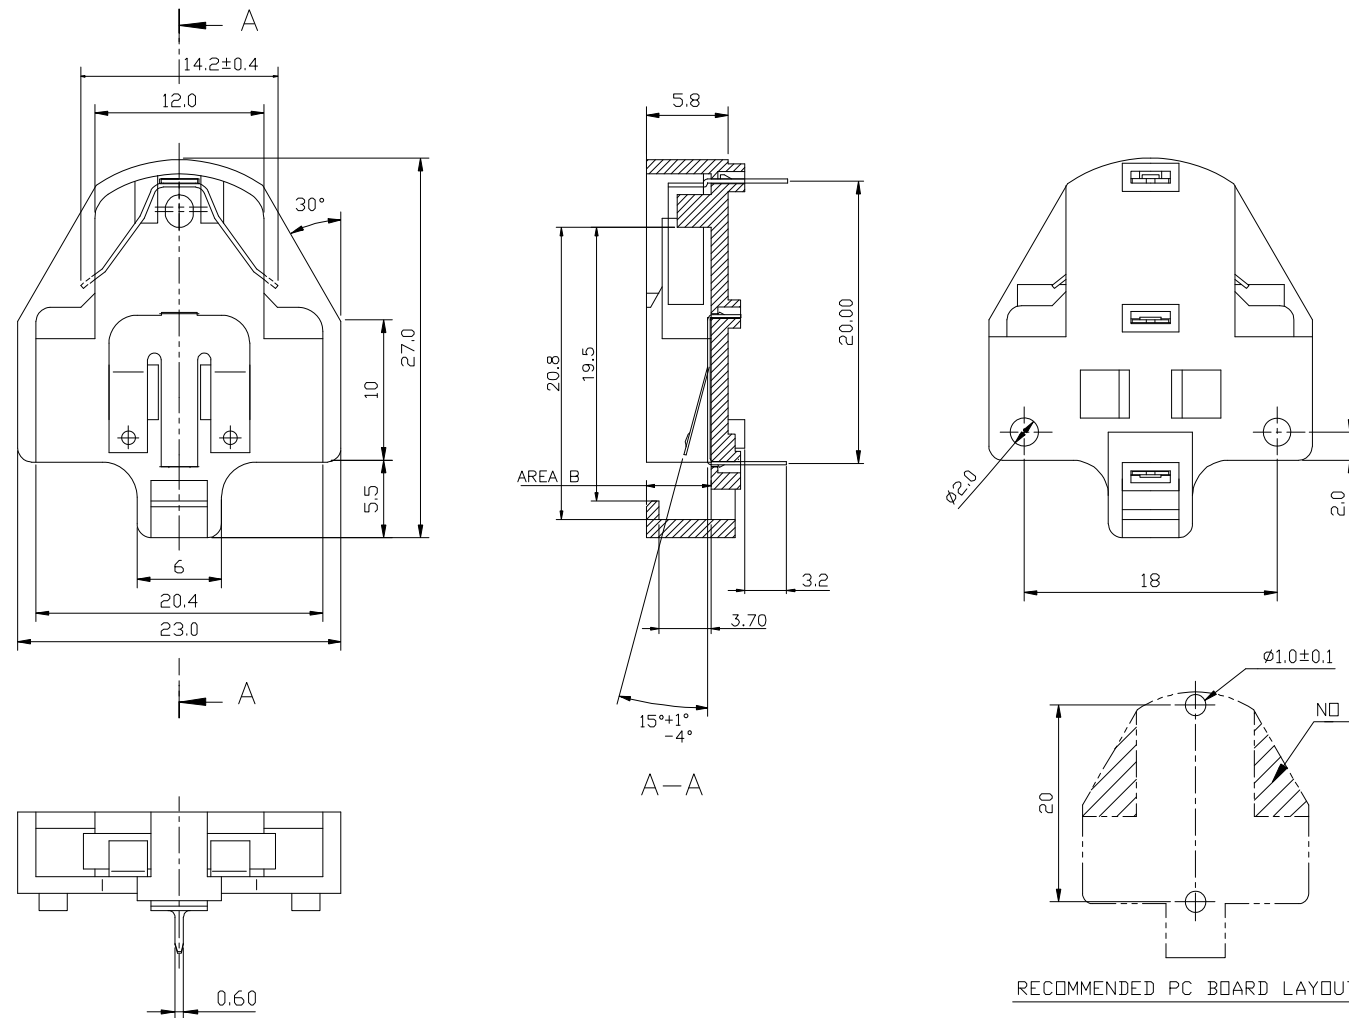


	1	2	3	4	5	6	7								
A	 NOTE: 1.MATERIAL 1.1 Housing:PBT UL94V-0 1.2 Contact:Phosphor Bronze,Au or Tin over Nickel 2.Flash: Area B:NA, Other 0.20mm Max. 3.Camber:0.05mm/cm Max. Deformation:NA,Warpage: 0.05mm/cm Max. Twist:NA. 4.Packing: Tray Order Code:A-BAT-CH-C8-EA-xTP5 G:Gold Flash Z:Tin							A							
B								B							
C								C							
D								D							
E								E							
F								F							
G	RoHS compliant unit:mm		Scale	Free				Date	Name	Description: Coin Cell Holders CR2032 Type		G			
			TOLERANCE					Drawn	12.20.2021	Peter					
			X.	±0.35				Approved	12.20.2021	Peter	ASSMANN WSW-NO.				
			.X	±0.25							A-BAT-CH-C8-EA-xTP5				
			.XX	±0.20											
			.XXX	±0.15				ASSMANN WSW components				Drawing-No. ASS 9161 CO rev00		H	
H			DIM	TOL	①	Drawn	12.20.2021					Peter	Customer-No.		SHEET 1 / 1
			Angle	TOL	Id.	modification	Date					Name			
	1	2	3	4	5	6	7								