




Ultra Low Profile 0404 Balun
For nRF24L01 and nRF24L01+
(TTM Application Note Ann-3001)

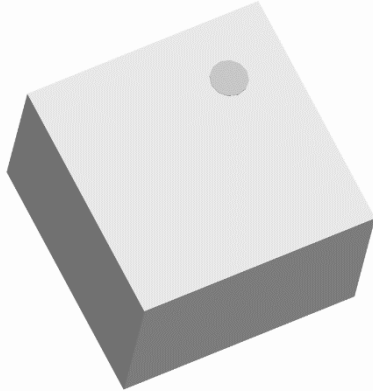

Description:

The BD2425NnRF is a low cost, low profile sub-miniature unbalanced to balanced transformer designed for differential inputs and output, tuned to provide optimal performance in tandem with the Nordic Semiconductor nRF24L01 and nRF24L01+. The BD2425NnRF is ideal for high volume manufacturing and delivers higher performance than a discrete implementation. The BD2425NnRF has an unbalanced port impedance of 50Ω and matched balanced port impedance when used in the specified matching network, which is the conjugate match of the nRF24L01 and nRF24L01+ devices. This transformation enables single ended signals to be applied to differential ports on the nRF24L01 and nRF24L01+. The BD2425NnRF is available on tape and reel for pick and place high volume manufacturing.

Detailed Electrical Specifications:


Specifications subject to change without notice.

Features:	Parameter	ROOM (25°C)			Unit
		Min.	Typ.	Max	
2400 – 2525 MHz 0.57 mm Height Profile - Matched to Nordic Semiconductor nRF24L01 and nRF24L01+ - Low Insertion Loss - Surface Mountable - Tape & Reel - Non-conductive Surface - RoHS Compliant	Frequency	2400		2525	MHz
	Unbalanced Port Impedance**		50		Ω
	Balanced Port Impedance**		Matched		Ω
	Return Loss**		10.2		dB
	Insertion Loss* **		1.25		dB
	Power Handling			1	Watts
	Operating Temperature	-55		+85	°C

* Insertion Loss stated at room temperature (Insertion Loss is approximately 0.1 dB higher at +85 °C)

** Stated performance assumes proper matching network found in application note: Ann-3001

Outline Drawing

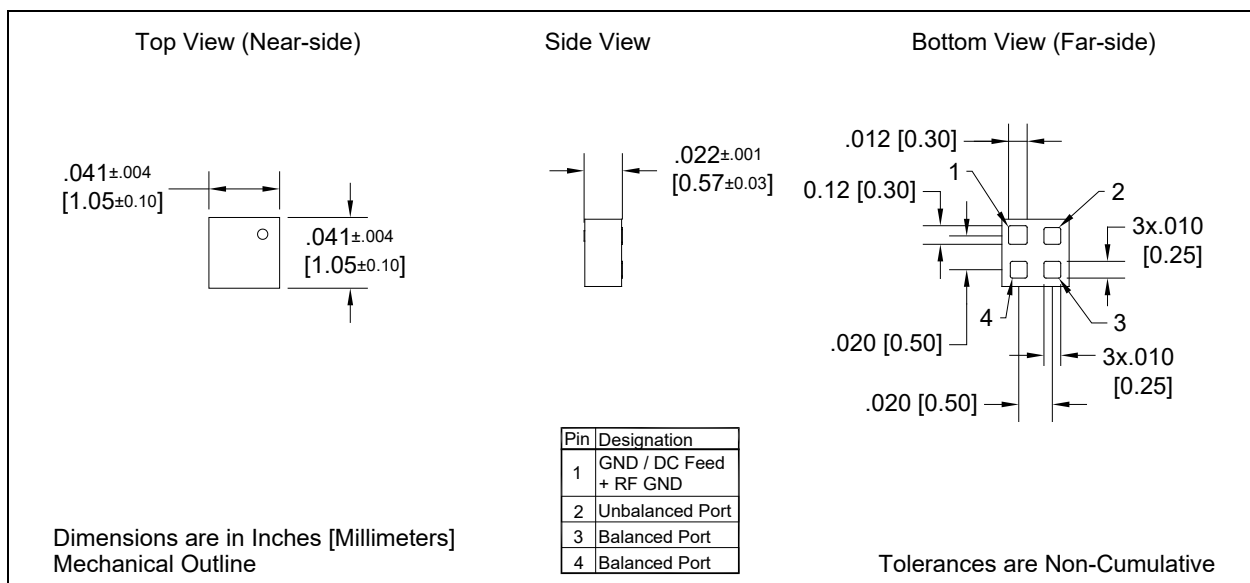


Mounting Configuration:

In order for Xinger surface mount components to work optimally, the proper impedance transmission lines must be used to connect to the RF ports. If this condition is not satisfied, insertion loss, Isolation and VSWR may not meet published specifications.

All of the Xinger components are constructed from ceramic filled PTFE composites which possess excellent electrical and mechanical stability.

An example of the PCB footprint used in the testing of these parts is shown below. An example of a DC-biased footprint is also shown below. In specific designs, the transmission line widths need to be adjusted to the unique dielectric coefficients and thicknesses as well as varying pick and place equipment tolerances

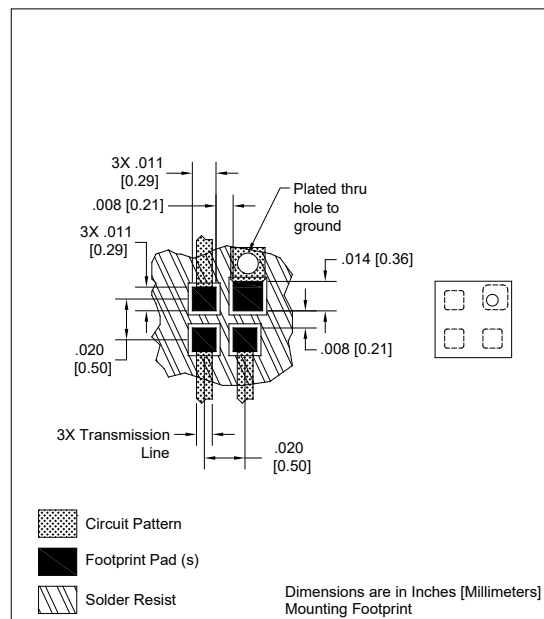

Packaging and Ordering Information:

Parts are available in reel and are packaged per EIA 481-2. Parts are oriented in tape and reel as shown below. Minimum order quantities are 4000 per reel. See Model Numbers below for further ordering information.

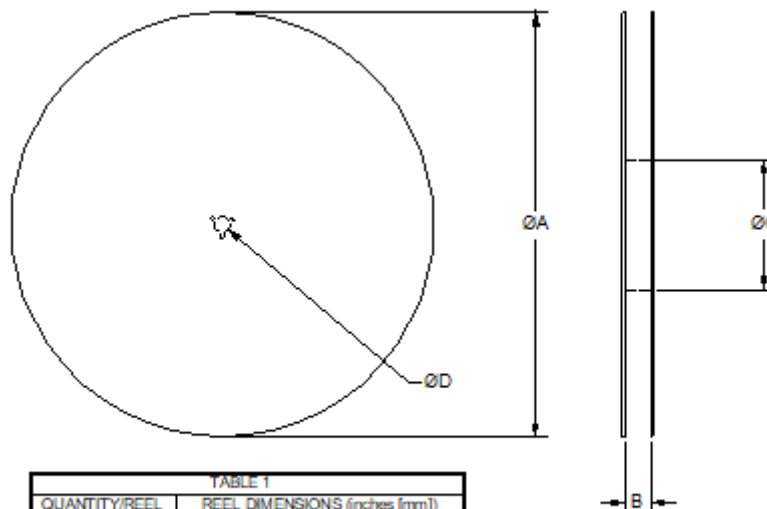
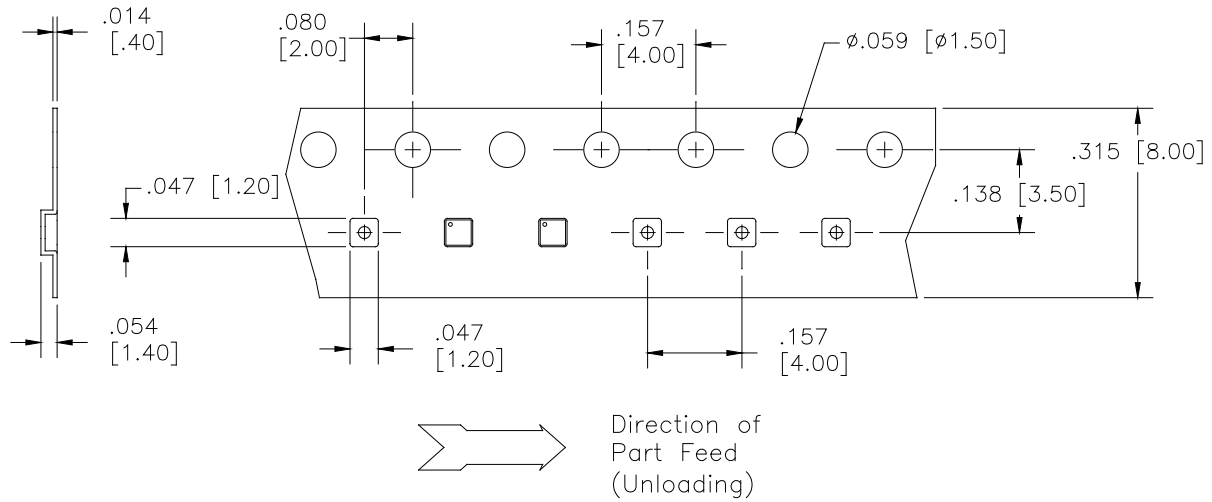


TABLE 1	
QUANTITY/REEL	REEL DIMENSIONS (inches [mm])
4000	ϕA 7.00 [177.8]
	B 0.32 [8.0]
	ϕC 2.0 [50.8]
	ϕD 0.512 [13.0]

Contact us:
rf&s_support@ttm.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Anaren:

BD2425NnRF