
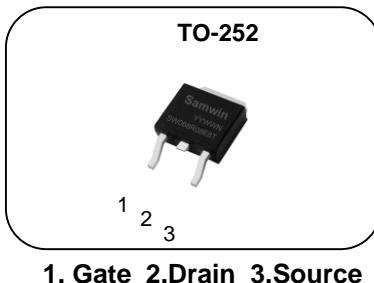


N-channel Enhanced mode TO-252 MOSFET**Features**

- High ruggedness
- Low $R_{DS(ON)}$ (Typ 6.7mΩ)@ $V_{GS}=10V$
- Low Gate Charge (Typ 128nC)
- Improved dv/dt Capability
- 100% Avalanche Tested
- Application: Synchronous Rectification, Li Battery Protect Board, Motor Drivers



BV_{DSS} : 80V
I_D : 100A
R_{DS(ON)} : 6.7mΩ

**General Description**

This power MOSFET is produced with advanced technology of SAMWIN. This technology enable the power MOSFET to have better characteristics, including fast switching time, low on resistance, low gate charge and especially excellent avalanche characteristics.

**Order Codes**

Item	Sales Type	Marking	Package	Packaging
1	SW D 068R08E8T	SW068R08E8T	TO-252	REEL

Absolute maximum ratings

Symbol	Parameter	Value	Unit
V_{DSS}	Drain to source voltage	80	V
I_D	Continuous drain current (@ $T_c=25^\circ C$)	100*	A
	Continuous drain current (@ $T_c=100^\circ C$)	66*	A
I_{DM}	Drain current pulsed (note 1)	400	A
V_{GS}	Gate to source voltage	± 20	V
E_{AS}	Single pulsed avalanche energy (note 2)	342	mJ
E_{AR}	Repetitive avalanche energy (note 1)	30	mJ
dv/dt	Peak diode recovery dv/dt (note 3)	5	V/ns
P_D	Total power dissipation (@ $T_c=25^\circ C$)	125	W
	Derating factor above 25°C	1.0	W/ $^\circ C$
T_{STG}, T_J	Operating junction temperature & storage temperature	-55 ~ + 150	$^\circ C$

*. Drain current is limited by junction temperature.

Thermal characteristics

Symbol	Parameter	Value	Unit
R_{thjc}	Thermal resistance, Junction to case	1.0	$^\circ C/W$

Electrical characteristic ($T_J = 25^\circ\text{C}$ unless otherwise specified)

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
Off characteristics						
BV_{DSS}	Drain to source breakdown voltage	$V_{\text{GS}}=0\text{V}$, $I_D=250\mu\text{A}$	80			V
$\Delta \text{BV}_{\text{DSS}} / \Delta T_J$	Breakdown voltage temperature coefficient	$I_D=250\mu\text{A}$, referenced to 25°C		0.04		$\text{V}/^\circ\text{C}$
I_{DSS}	Drain to source leakage current	$V_{\text{DS}}=80\text{V}$, $V_{\text{GS}}=0\text{V}$		1		μA
		$V_{\text{DS}}=64\text{V}$, $T_J=125^\circ\text{C}$		50		μA
I_{GSS}	Gate to source leakage current, forward	$V_{\text{GS}}=20\text{V}$, $V_{\text{DS}}=0\text{V}$		100		nA
	Gate to source leakage current, reverse	$V_{\text{GS}}=-20\text{V}$, $V_{\text{DS}}=0\text{V}$		-100		nA
On characteristics						
$V_{\text{GS(TH)}}$	Gate threshold voltage	$V_{\text{DS}}=V_{\text{GS}}$, $I_D=250\mu\text{A}$	2		4	V
$R_{\text{DS(ON)}}$	Drain to source on state resistance	$V_{\text{GS}}=10\text{V}$, $I_D=30\text{A}$, $T_J=25^\circ\text{C}$		6.7	8	$\text{m}\Omega$
		$V_{\text{GS}}=10\text{V}$, $I_D=30\text{A}$, $T_J=125^\circ\text{C}$		10.4		$\text{m}\Omega$
G_{fs}	Forward transconductance	$V_{\text{DS}}=5\text{V}$, $I_D=30\text{A}$		58		S
Dynamic characteristics						
C_{iss}	Input capacitance	$V_{\text{GS}}=0\text{V}$, $V_{\text{DS}}=40\text{V}$, $f=1\text{MHz}$		6242		pF
C_{oss}	Output capacitance			340		
C_{rss}	Reverse transfer capacitance			282		
$t_{\text{d(on)}}$	Turn on delay time	$V_{\text{DS}}=40\text{V}$, $I_D=30\text{A}$, $R_G=4.7\Omega$, $V_{\text{GS}}=10\text{V}$ (note 4,5)		27		ns
t_r	Rising time			60		
$t_{\text{d(off)}}$	Turn off delay time			94		
t_f	Fall time			37		
Q_g	Total gate charge	$V_{\text{DS}}=64\text{V}$, $V_{\text{GS}}=10\text{V}$, $I_D=30\text{A}$, $I_G=4\text{mA}$ (note 4,5)		128		nC
Q_{gs}	Gate-source charge			28		
Q_{gd}	Gate-drain charge			44		
R_g	Gate resistance	$V_{\text{DS}}=0\text{V}$, Scan F mode		2.4		Ω

Source to drain diode ratings characteristics

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
I_s	Continuous source current	Integral reverse p-n Junction diode in the MOSFET			100	A
I_{SM}	Pulsed source current				400	A
V_{SD}	Diode forward voltage drop.	$I_s=45\text{A}$, $V_{\text{GS}}=0\text{V}$			1.4	V
t_{rr}	Reverse recovery time	$I_s=30\text{A}$, $V_{\text{GS}}=0\text{V}$, $dI_F/dt=100\text{A}/\mu\text{s}$		37		ns
Q_{rr}	Reverse recovery charge			56		nC

※ Notes

- Repetitive rating : pulse width limited by junction temperature.
- $L = 0.5\text{mH}$, $I_{\text{AS}} = 37\text{A}$, $V_{\text{DD}} = 50\text{V}$, $R_G = 25\Omega$, Starting $T_J = 25^\circ\text{C}$
- $I_{\text{SP}} \leq 30\text{A}$, $di/dt = 100\text{A}/\mu\text{s}$, $V_{\text{DD}} \leq \text{BV}_{\text{DSS}}$, Starting $T_J = 25^\circ\text{C}$
- Pulse Test : Pulse Width $\leq 300\mu\text{s}$, duty cycle $\leq 2\%$.
- Essentially independent of operating temperature.

Fig. 1. On-state characteristics

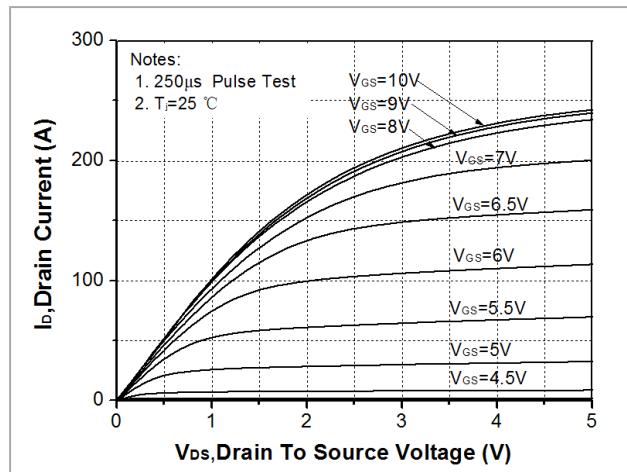


Fig. 2. Transfer Characteristics

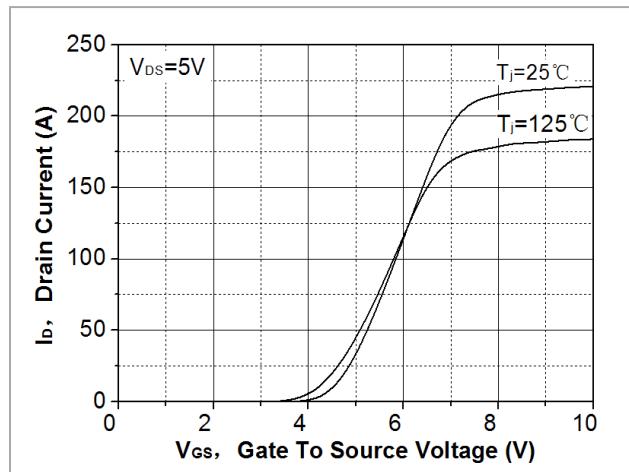


Fig. 3. On-resistance variation vs. drain current and gate voltage

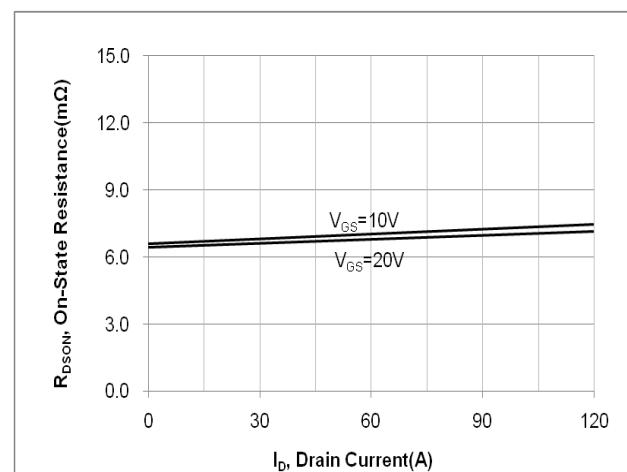


Fig. 4. On-state current vs. diode forward voltage

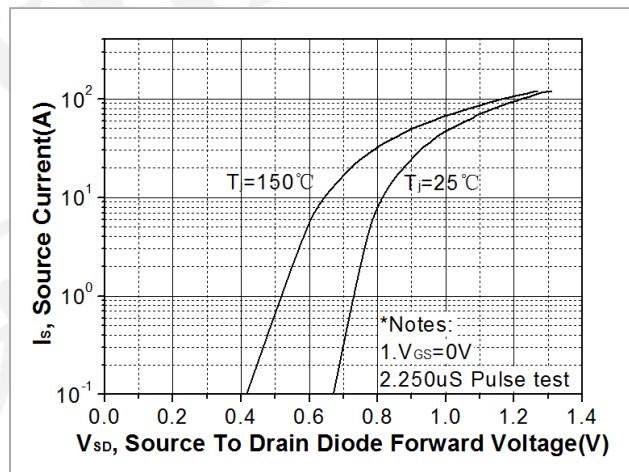


Fig 5. Breakdown voltage variation vs. junction temperature

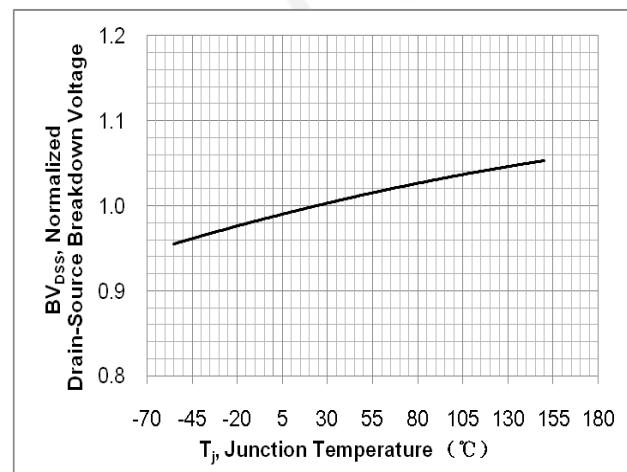


Fig. 6. On-resistance variation vs. junction temperature

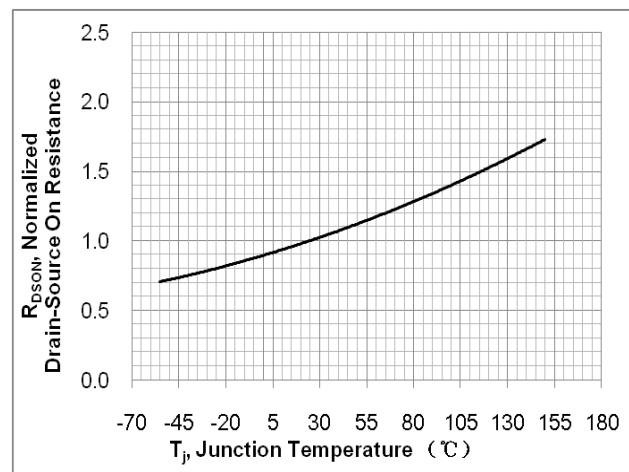


Fig. 7. Gate charge characteristics

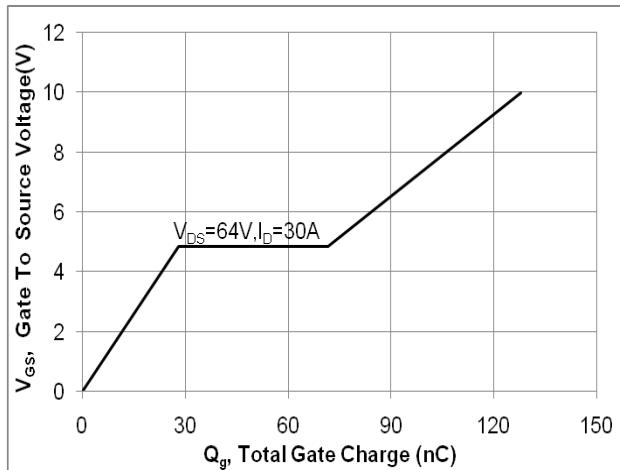


Fig. 8. Capacitance Characteristics

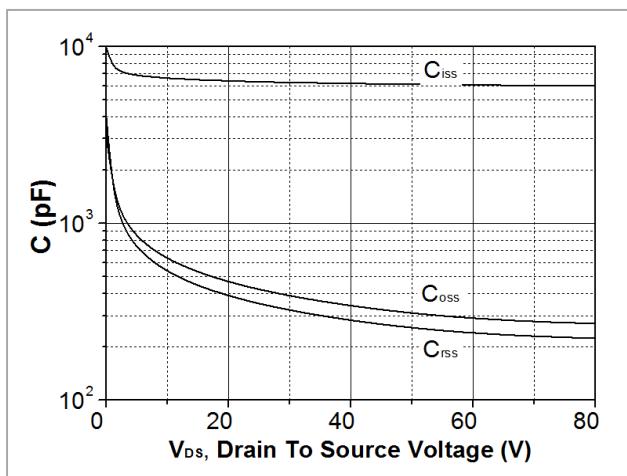


Fig. 9. Maximum safe operating area

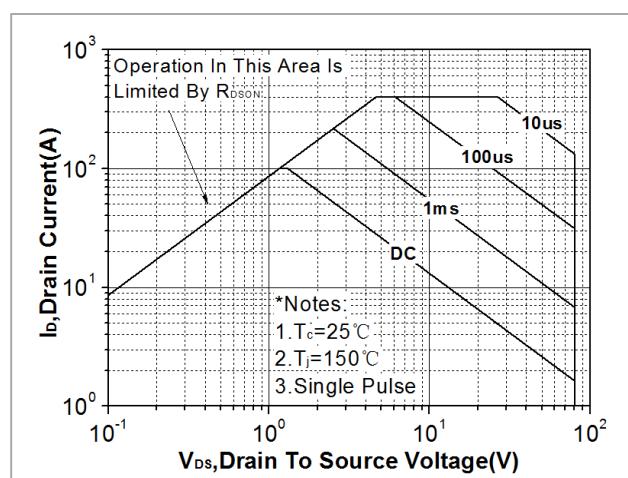


Fig. 10. Maximum drain current vs. case temperature

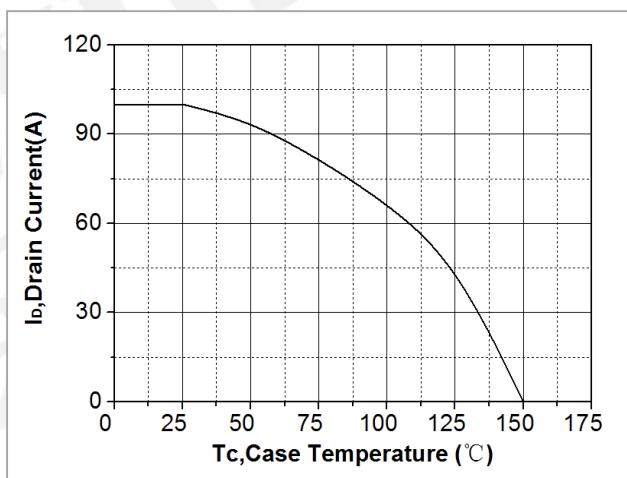


Fig. 11. Transient thermal response curve

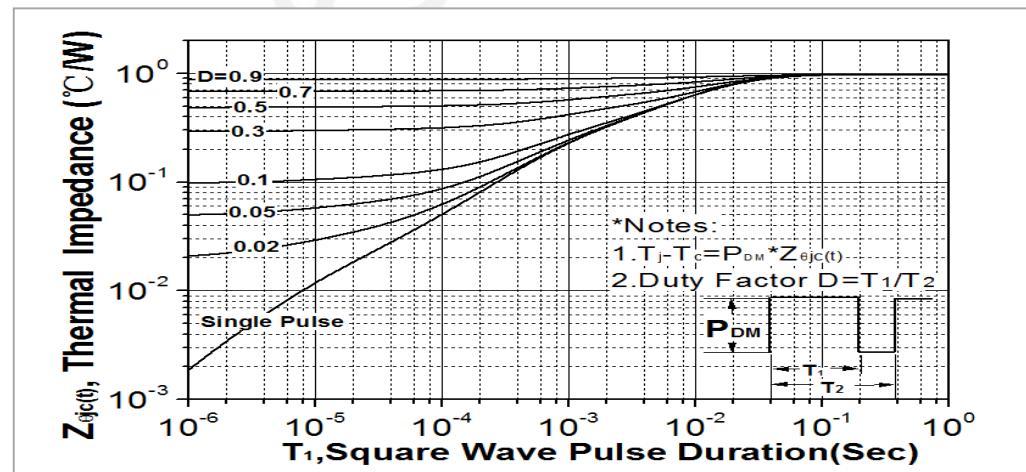


Fig. 12. Gate charge test circuit & waveform

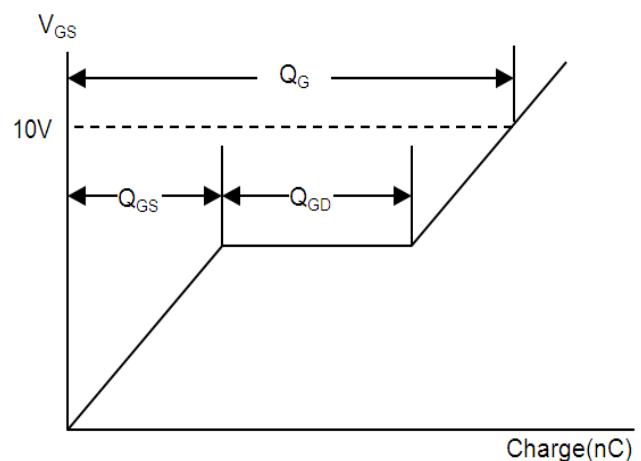
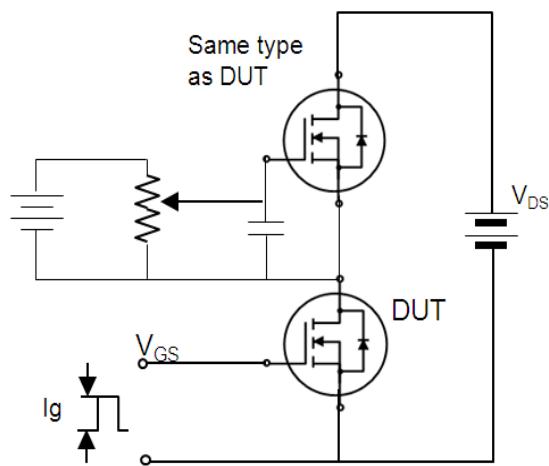


Fig. 13. Switching time test circuit & waveform

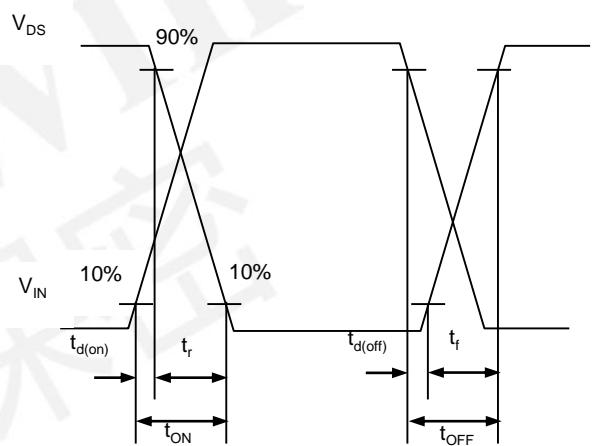
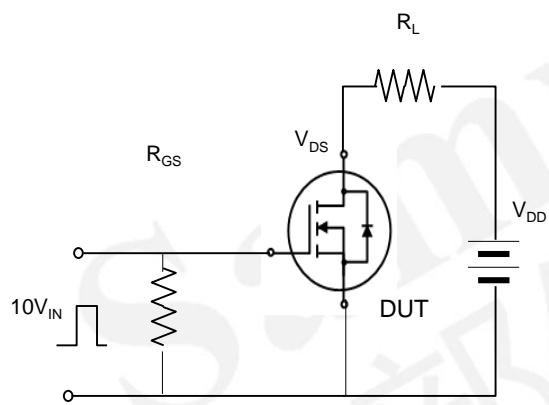


Fig. 14. Unclamped Inductive switching test circuit & waveform



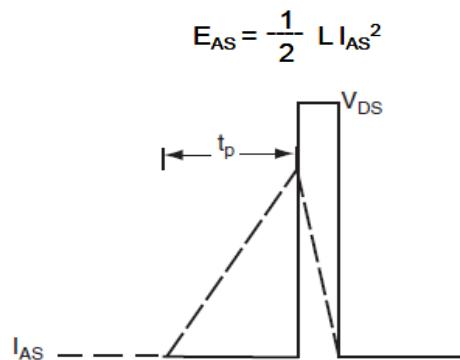


Fig. 15. Peak diode recovery dv/dt test circuit & waveform

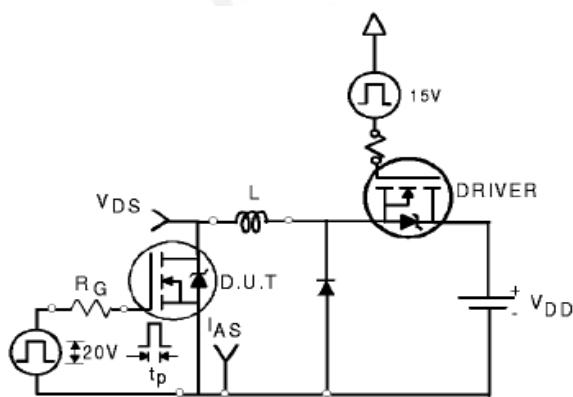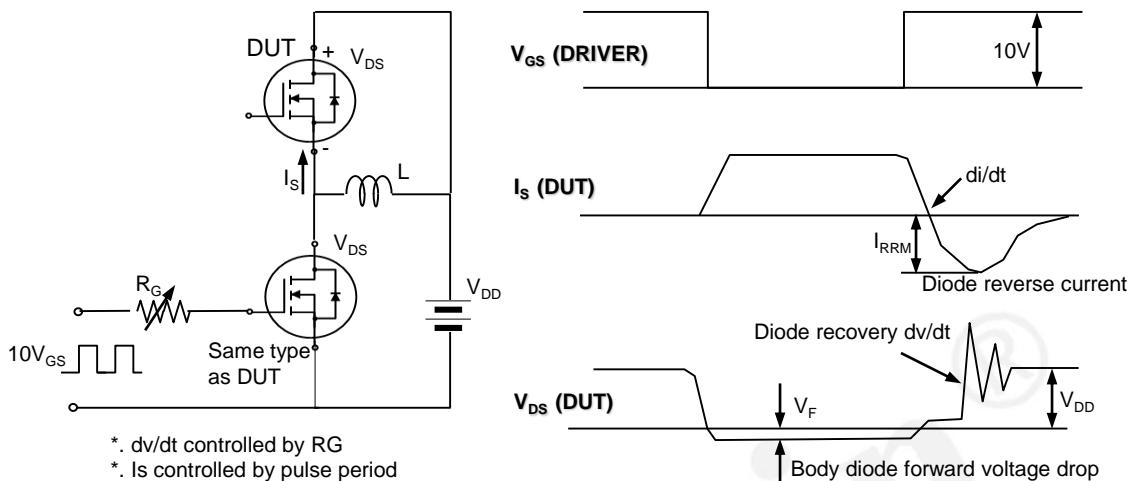

DISCLAIMER

- * All the data & curve in this document was tested in SEMIPOWER TESTING & APPLICATION CENTER.
- * This product has passed the PCT, TC, HTRB, HTGB, HAST, PC and Solderdunk reliability testing.
- * Qualification standards can also be found on the Web site (<http://www.semipower.com.cn>)
- * Suggestions for improvement are appreciated, Please send your suggestions to samwin@samwinsemi.com