

# Surface Mount Power Splitter/Combiner

3 Way-0° 50Ω 1 to 300 MHz

AD3PS-1+



Generic photo used for illustration purposes only

CASE STYLE: CJ725

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

| Reel Size | Devices/Reel         |
|-----------|----------------------|
| 7"        | 10, 20, 50, 100, 200 |
| 13"       | 500                  |

## Maximum Ratings


|                             |                |
|-----------------------------|----------------|
| Operating Temperature       | -40°C to 85°C  |
| Storage Temperature         | -55°C to 100°C |
| Power Input (as a splitter) | 0.5W max.      |
| Internal Dissipation        | 0.25W max.     |

Permanent damage may occur if any of these limits are exceeded.


## Pin Connections

|          |         |
|----------|---------|
| SUM PORT | 1       |
| PORT 1   | 8       |
| PORT 2   | 5       |
| PORT 3   | 4       |
| GROUND   | 2,3,6,7 |

## Outline Drawing



### PCB Land Pattern




Suggested Layout,  
Tolerance to be within ±.002

## Outline Dimensions (inch mm)

| A     | B    | C    | D     | E    | F    | G     |       |
|-------|------|------|-------|------|------|-------|-------|
| .397  | .032 | .385 | .435  | .310 | .215 | .100  |       |
| 10.08 | 0.81 | 9.78 | 11.05 | 7.87 | 5.46 | 2.54  |       |
| H     | J    | K    | L     | M    | N    | P     | wt    |
| .015  | .025 | .035 | .075  | .120 | .060 | .420  | grams |
| 0.38  | 0.64 | 0.89 | 1.91  | 3.05 | 1.52 | 10.67 | 0.45  |

## Demo Board MCL P/N: TB-83 Suggested PCB Layout (PL-063)

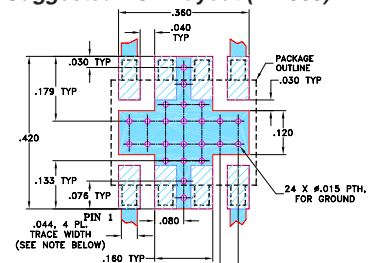

- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .0020" ± 0.0015". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
3. DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
4. DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

### Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)

## Features

- wideband, 1 to 300 MHz
- high isolation, 35 dB typ.
- good input port matching VSWR, 1.12 typ.
- good output port matching VSWR, 1.14 typ.
- small surface mount package

## Applications

- VHF-TV
- aircraft communications

## Electrical Specifications




| FREQ.<br>RANGE<br>(MHz)        | ISOLATION<br>(dB) |      |      |      |      |      | INSERTION LOSS (dB)<br>ABOVE 4.8 dB |      |      |      |      |      | PHASE<br>UNBALANCE<br>(Degrees) |      |      | AMPLITUDE<br>UNBALANCE<br>(dB) |      |      |
|--------------------------------|-------------------|------|------|------|------|------|-------------------------------------|------|------|------|------|------|---------------------------------|------|------|--------------------------------|------|------|
|                                | L                 |      | M    |      | U    |      | L                                   |      | M    |      | U    |      | L                               | M    | U    | L                              | M    | U    |
|                                | Typ.              | Min. | Typ. | Min. | Typ. | Min. | Typ.                                | Max. | Typ. | Max. | Typ. | Max. | Max.                            | Max. | Max. | Max.                           | Max. | Max. |
| f <sub>c</sub> -f <sub>u</sub> | 40                | 23   | 35   | 20   | 27   | 18   | 0.3                                 | 0.8  | 0.4  | 1.0  | 0.8  | 1.5  | 1                               | 4    | 6    | 0.2                            | 0.3  | 0.5  |

L = 1-10 MHz M = 10-150 MHz U = 150-300 MHz

## Typical Performance Data

| Freq. (MHz) | Total Loss <sup>1</sup> (dB) |      |      | Amp. Unbal. (dB) | Isolation (dB) |       |       | Phase Unbal. (deg.) | VSWR S | VSWR 1 | VSWR 2 | VSWR 3 |
|-------------|------------------------------|------|------|------------------|----------------|-------|-------|---------------------|--------|--------|--------|--------|
|             | S-1                          | S-2  | S-3  |                  | 1-2            | 1-3   | 2-3   |                     |        |        |        |        |
| 1.00        | 5.15                         | 5.16 | 5.17 | 0.01             | 36.32          | 40.91 | 35.31 | 0.04                | 1.10   | 1.24   | 1.26   | 1.25   |
| 4.00        | 5.05                         | 5.06 | 5.06 | 0.01             | 42.83          | 45.40 | 44.11 | 0.04                | 1.04   | 1.13   | 1.13   | 1.13   |
| 7.00        | 5.05                         | 5.06 | 5.06 | 0.01             | 43.56          | 45.44 | 46.46 | 0.09                | 1.04   | 1.11   | 1.12   | 1.12   |
| 10.00       | 5.06                         | 5.06 | 5.06 | 0.01             | 43.53          | 45.25 | 46.58 | 0.11                | 1.04   | 1.11   | 1.11   | 1.11   |
| 20.00       | 5.08                         | 5.08 | 5.09 | 0.01             | 42.24          | 43.79 | 43.05 | 0.16                | 1.04   | 1.10   | 1.10   | 1.11   |
| 40.00       | 5.11                         | 5.12 | 5.12 | 0.00             | 38.90          | 40.37 | 37.60 | 0.35                | 1.06   | 1.10   | 1.10   | 1.10   |
| 60.00       | 5.14                         | 5.14 | 5.15 | 0.01             | 36.16          | 37.63 | 34.33 | 0.51                | 1.08   | 1.10   | 1.11   | 1.11   |
| 100.00      | 5.21                         | 5.20 | 5.21 | 0.00             | 32.45          | 33.97 | 30.23 | 0.89                | 1.12   | 1.11   | 1.12   | 1.12   |
| 120.00      | 5.24                         | 5.24 | 5.23 | 0.01             | 31.12          | 32.66 | 28.79 | 1.05                | 1.14   | 1.11   | 1.12   | 1.12   |
| 200.00      | 5.42                         | 5.40 | 5.39 | 0.03             | 27.39          | 29.05 | 24.87 | 1.69                | 1.21   | 1.14   | 1.16   | 1.15   |
| 220.00      | 5.47                         | 5.44 | 5.42 | 0.05             | 26.68          | 28.34 | 24.14 | 1.84                | 1.23   | 1.15   | 1.17   | 1.16   |
| 240.00      | 5.54                         | 5.50 | 5.48 | 0.06             | 25.96          | 27.65 | 23.43 | 1.93                | 1.25   | 1.15   | 1.18   | 1.17   |
| 260.00      | 5.63                         | 5.57 | 5.55 | 0.08             | 25.24          | 26.92 | 22.74 | 2.15                | 1.27   | 1.16   | 1.19   | 1.18   |
| 280.00      | 5.71                         | 5.65 | 5.63 | 0.09             | 24.50          | 26.14 | 22.04 | 2.25                | 1.29   | 1.18   | 1.21   | 1.19   |
| 300.00      | 5.82                         | 5.74 | 5.71 | 0.11             | 23.71          | 25.31 | 21.33 | 2.39                | 1.31   | 1.19   | 1.23   | 1.21   |

1. Total Loss = Insertion Loss + 4.8dB splitter loss.

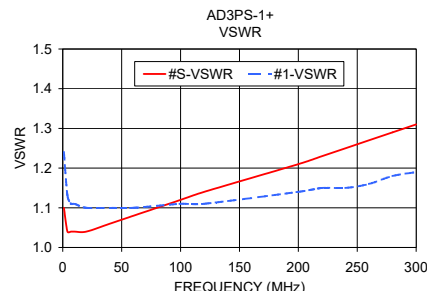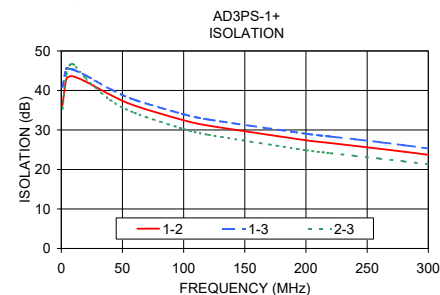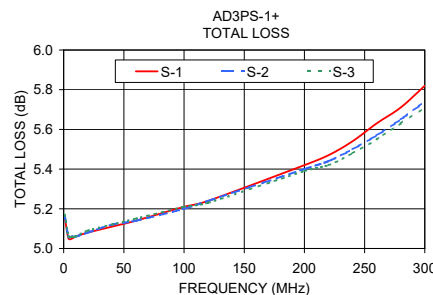

## electrical schematic



Mini-Circuits®

www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. J  
M151107  
ED-7781/1  
AD3PS-1+  
HY/TD/CP/AM  
200407  
Page 1 of 1

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mini-Circuits:](#)

[AD3PS-1+](#)