



TM0035N03D

N-Channel Enhancement Mosfet

General Description

- Low $R_{DS(ON)}$
- RoHS and Halogen-Free Compliant

Applications

- Load switch
- PWM


General Features

$V_{DS} = 30V$ $I_D = 100A$



$R_{DS(ON)} = 3.5m\Omega(\text{typ}) @ V_{GS} = 10V$

100% UIS Tested

100% R_g Tested



D:TO-252-3



Marking: 100N03 OR 4132

Absolute Maximum Ratings ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Symbol	Parameter	Rating	Unit
Common Ratings			
V_{DSS}	Drain-Source Voltage	30	V
V_{GSS}	Gate-Source Voltage	± 20	
I_D	Continuous Drain Current	$T_C = 25^\circ\text{C}$	A
		$T_C = 100^\circ\text{C}$	
I_{DM}	Pulsed Drain Current	$T_C = 25^\circ\text{C}$	
P_D	Power Dissipation	$T_A = 25^\circ\text{C}$	W
P_D	Power Dissipation	$T_C = 25^\circ\text{C}$	W
T_{STG}, T_j	Storage Temperature Range	-55 to 150	$^\circ\text{C}$
I_D	Continuous Drain Current	$T_A = 25^\circ\text{C}$	A
		$T_A = 70^\circ\text{C}$	

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress rating only and functional device operation is not implied.

TM0035N03D

N-Channel Enhancement Mosfet

Electrical Characteristics (T_J=25°C unless otherwise specified)

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
Static Characteristics						
BV _{DSS}	Drain-Source Breakdown Voltage	V _{GS} =0V, I _{DS} =250μA	30	-	-	V
I _{DSS}	Zero Gate Voltage Drain Current	V _{DS} =24V, V _{GS} =0V T _J =85°C	- -	- -	1 30	μA
V _{GS(th)}	Gate Threshold Voltage	V _{DS} =V _{GS} , I _{DS} =250μA	1	-	2.5	V
I _{GSS}	Gate Leakage Current	V _{GS} =±20V, V _{DS} =0V	-	-	±100	nA
R _{DS(ON)}	Drain-Source On-state Resistance	V _{GS} =10V, I _{DS} =20A V _{GS} =4.5V, I _{DS} =15A	- -	3.5 5.5	5.5 6.8	mΩ
Body Diode Characteristics						
V _{SD}	Diode Forward Voltage	I _{SD} =40A, V _{GS} =0V	-	0.7	1.3	V
Dynamic Characteristics ^e						
C _{iss}	Input Capacitance	V _{GS} =0V, V _{DS} =10V, Frequency=1.0MHz	-	1356	-	pF
C _{oss}	Output Capacitance		-	55	-	
C _{rss}	Reverse transfer capacitance		-	45	-	
t _{d(ON)}	Turn-on delay Time	V _{GS} =10V ,V _{DS} =15V R _G =1.8Ω, I _D =20A , R _L =30Ω	-	8	-	nS
t _r	Turn-on rise Time		-	9	-	
t _{d(OFF)}	Turn-off delay Time		-	32	-	
t _f	Turn-off rise Time		-	6	-	
Gate Charge Characteristics ^e						
Q _g	Total Gate Charge	V _{DS} =15V, V _{GS} =10V, I _{DS} =20A	-	23	-	
Q _{gs}	Gate-Source Charge		-	5	-	
Q _{gd}	Gate-Drain Charge		-	3	-	

Note: 1. Pulse test: pulse width≤300uS, duty cycle≤2%

2.Static parameters are based on package level with recommended wire bonding

Typical Performance Characteristics

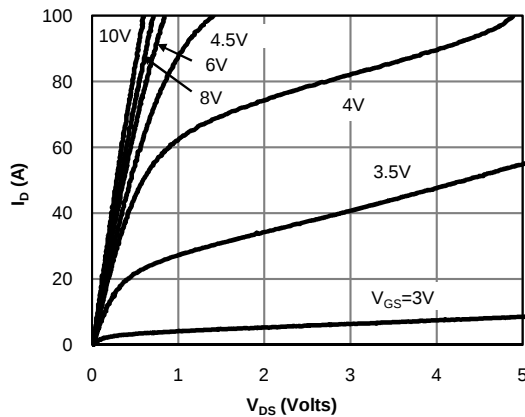


Fig 1: On-Region Characteristics (Note E)

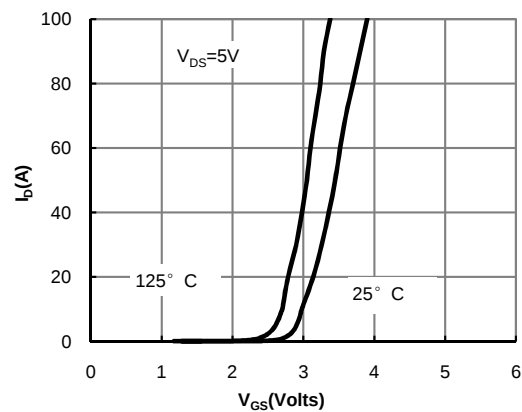


Figure 2: Transfer Characteristics (Note E)

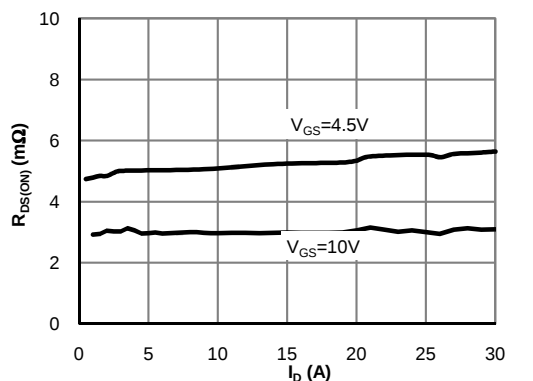


Figure 3: On-Resistance vs. Drain Current and Gate Voltage (Note E)

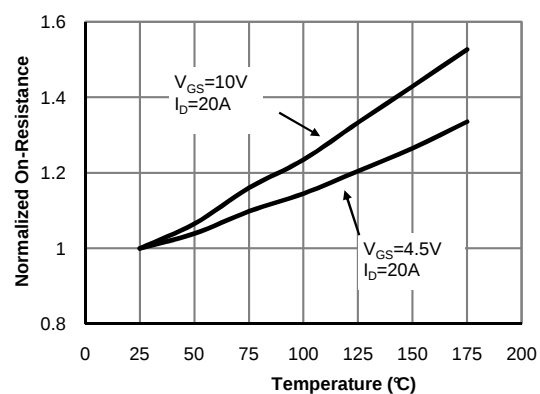


Figure 4: On-Resistance vs. Junction Temperature (Note E)

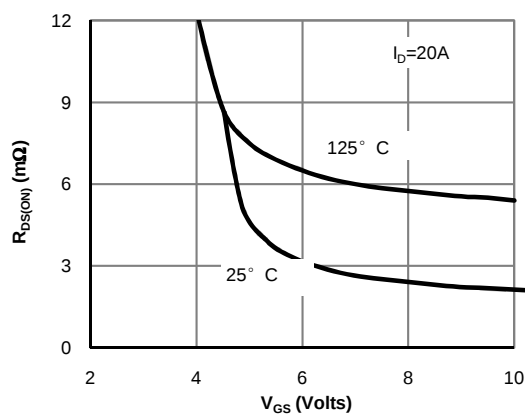


Figure 5: On-Resistance vs. Gate-Source Voltage (Note E)

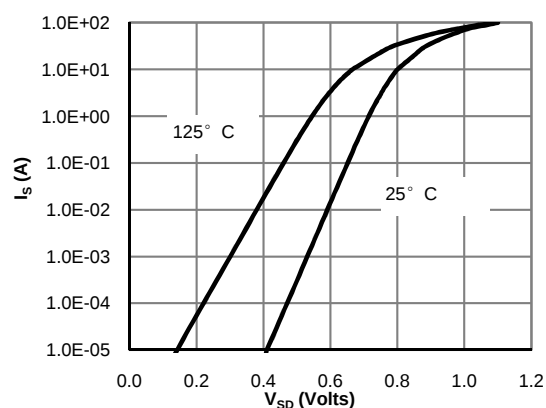


Figure 6: Body-Diode Characteristics (Note E)

TM0035N03D

N-Channel Enhancement Mosfet

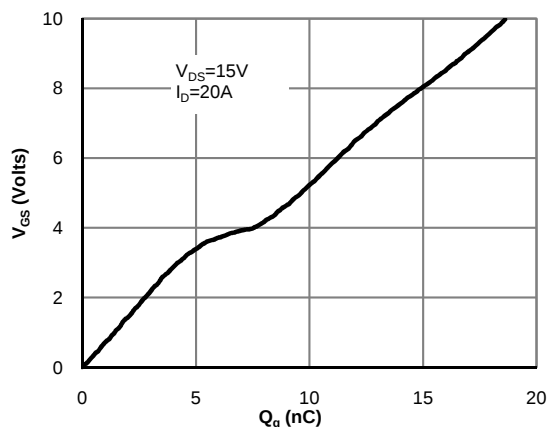


Figure 7: Gate-Charge Characteristics

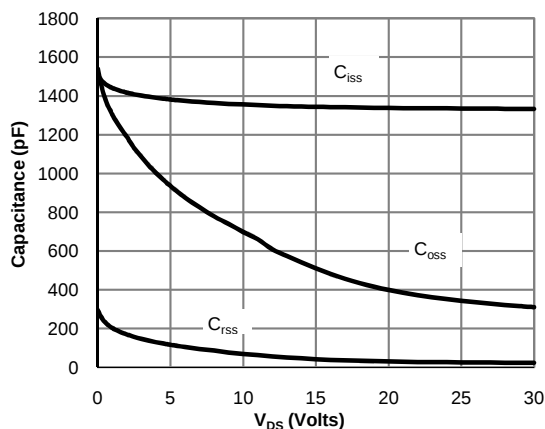


Figure 8: Capacitance Characteristics

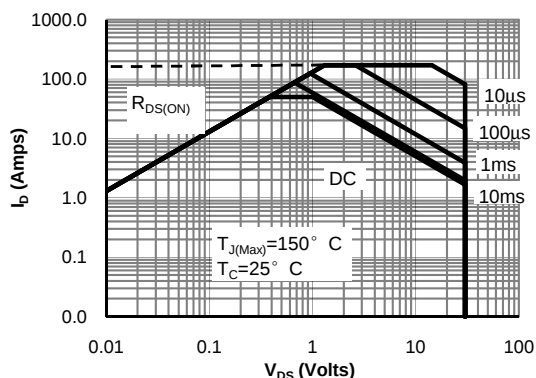


Figure 9: Maximum Forward Biased Safe Operating Area (Note F)

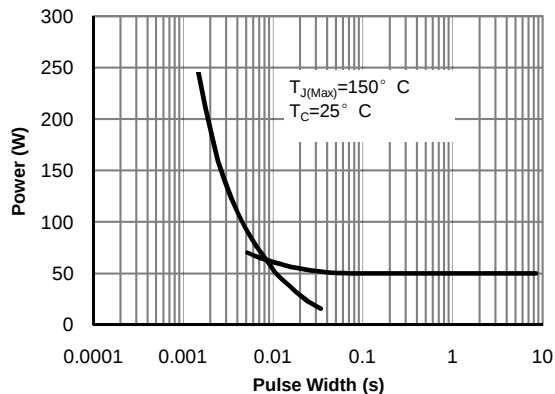


Figure 10: Single Pulse Power Rating Junction-to-Case (Note F)





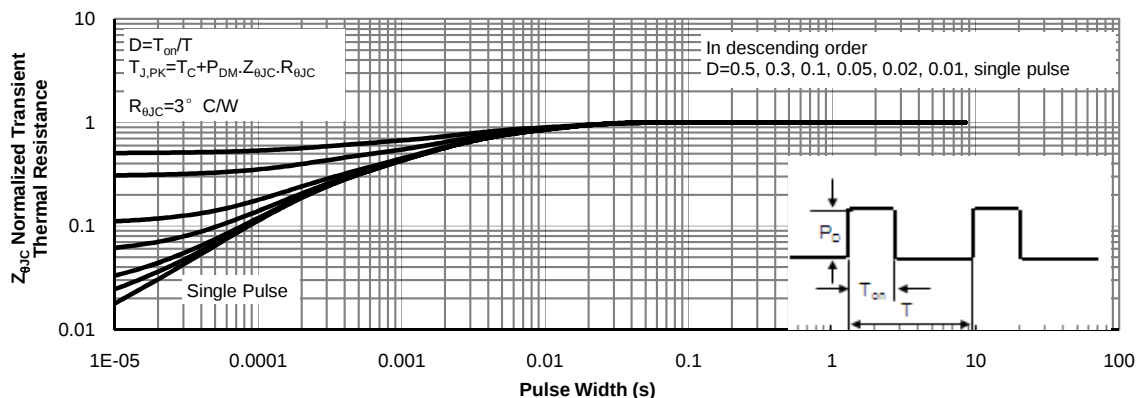


Figure 11: Normalized Maximum Transient Thermal Impedance (Note F)


Avalanche Test Circuit and Waveforms

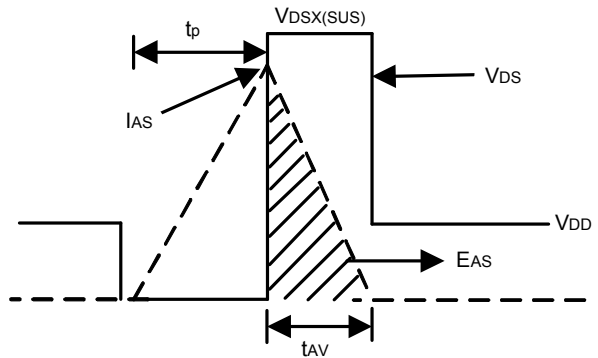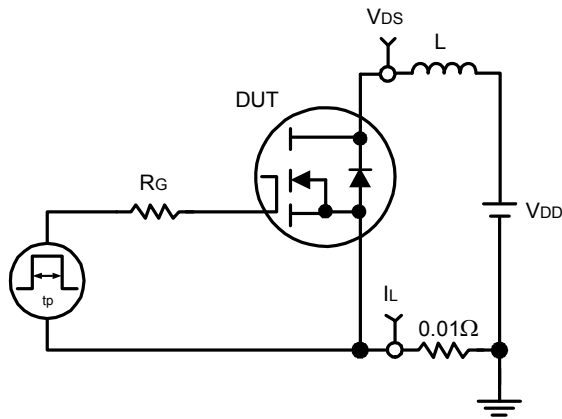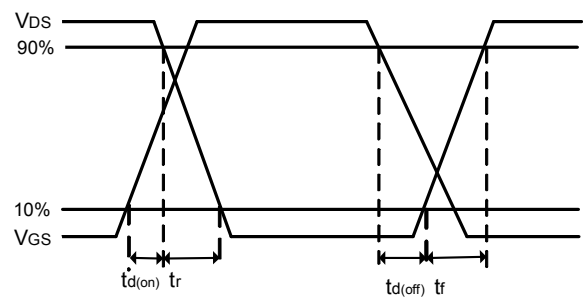

Switching Time Test Circuit and Waveforms

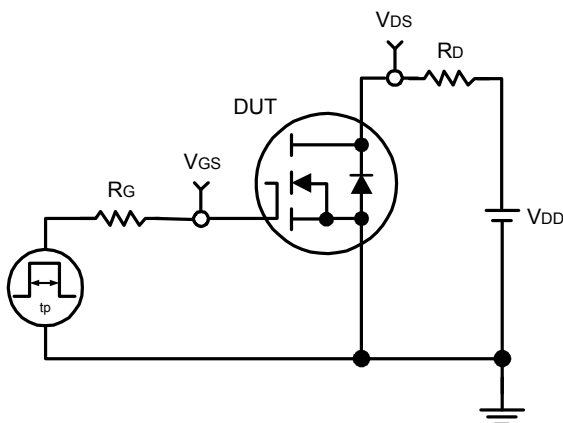

Package Information:TO-252-3L

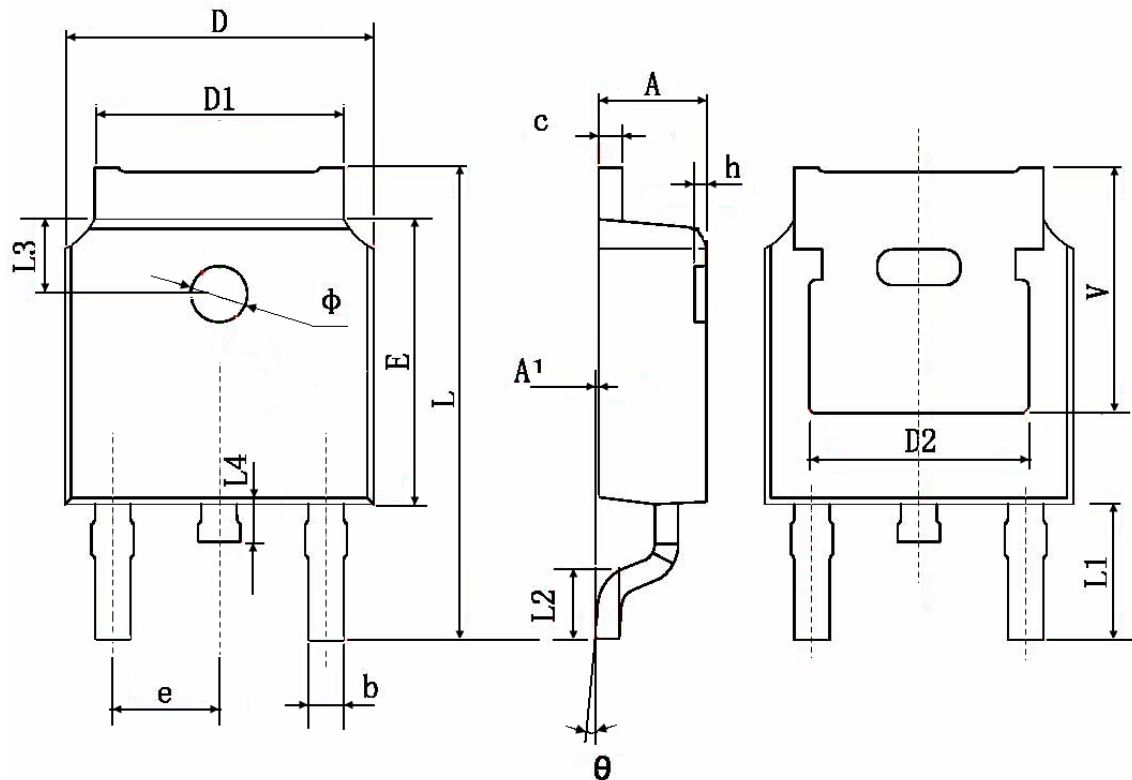

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	2.200	2.400	0.087	0.094
A1	0.000	0.127	0.000	0.005
b	0.660	0.860	0.026	0.034
c	0.460	0.580	0.018	0.023
D	6.500	6.700	0.256	0.264
D1	5.100	5.460	0.201	0.215
D2	4.830 TYP.		0.190 TYP.	
E	6.000	6.200	0.236	0.244
e	2.186	2.386	0.086	0.094
L	9.800	10.400	0.386	0.409
L1	2.900 TYP.		0.114 TYP.	
L2	1.400	1.700	0.055	0.067
L3	1.600 TYP.		0.063 TYP.	
L4	0.600	1.000	0.024	0.039
Φ	1.100	1.300	0.043	0.051
θ	0°	8°	0°	8°
h	0.000	0.300	0.000	0.012
V	5.350 TYP.		0.211 TYP.	