

INTERCONNECTS

SERIES 350, 360, 370, 380 • 2,54 GRID SOLDER TAIL • SINGLE ROW STRIPS

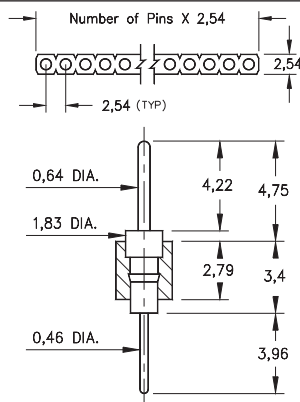


FIG. 1




FIG. 2




FIG. 3




FIG. 4

- Series 350, 360, 370 & 380 single row header strips come in various styles (pin, slotted, head, turret and solder cup) with pluggable solder tails

350...001 uses pin #0290

360...001 uses pin #0282

370...001 uses pin #0700

380...001 uses pin #8000

See pages 215 and 216 for details

- Insulators are high temperature thermoplastic, suitable for all soldering operations



ORDERING INFORMATION

FIG. 1	Series 350...001	0,64 / 0,46 Dia. Solder Tails												
	350-XX-1	-00-001000	Specify number of pins 01-64											
FIG. 2	Series 360...001	Slotted Head / Solder Tail												
	360-XX-1	-00-001000	Specify number of pins 01-64											
FIG. 3	Series 370...001	Turret / Solder Tail												
	370-XX-1	-00-001000	Specify number of pins 01-64											
FIG. 4	Series 380...001	Solder Cup / Solder Tail												
	380-XX-1	-00-001000	Specify number of pins 01-64											
RoHS - 2 2011/65/EU XX=Plating Code See Below For Electrical, Mechanical & Enviromental Data, See page 264 <table><tr><td>SPECIFY PLATING CODE XX=</td><td>10</td><td>90</td><td>40</td><td></td></tr><tr><td>Pin Plating</td><td>0,25µm Au</td><td>5,08µm Sn/Pb</td><td>5,08µm Sn</td><td></td></tr></table>					SPECIFY PLATING CODE XX=	10	90	40		Pin Plating	0,25µm Au	5,08µm Sn/Pb	5,08µm Sn	
SPECIFY PLATING CODE XX=	10	90	40											
Pin Plating	0,25µm Au	5,08µm Sn/Pb	5,08µm Sn											