



针形裸端子
Non-Insulated Pin Terminal

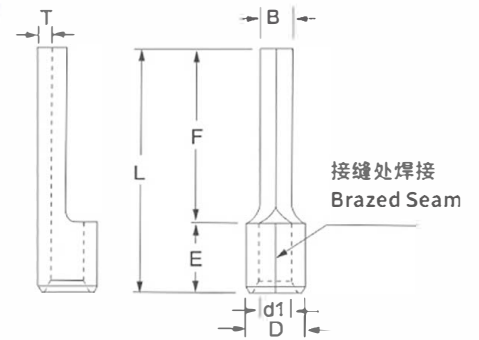

型号 ITEM NO.	尺寸 DIMENSION mm							包装 PCS/ PACK	说明 EXPLANATION
	B	F	L	E	D	d1	T		
PTN1.25-7	1.9	7.0	11.8	4.8	3.4	1.7	0.7	1000	导线截面:0.5~1.5mm ² (美国线规22~16) 最大电流: I _{max} =19A 材质:紫铜 Lead Section:0.5~1.5mm ² (A.W. G.22~16) Max Current:I _{max} =19A Material:Copper
PTN1.25-9		9.0	13.8						
PTN1.25-10		10.0	14.8						
PTN1.25-12		12.0	16.8						
PTN1.25-13		13.0	17.8						
PTN1.25-18		18.0	22.8						
PTN2-8	1.9	8.0	12.8	4.8	4.1	2.3	0.8	1000	导线截面:1.5~2.5mm ² (美国线规16~14) 最大电流: I _{max} =27A 材质:紫铜 Lead Section:1.5~2.5mm ² (A.W. G.16~14) Max Current:I _{max} =27A Material:Copper
PTN2-9		9.0	13.8						
PTN2-10		10.0	14.8						
PTN2-12		12.0	16.8						
PTN2-13		13.0	17.8						
PTN2-18		18.0	22.8						
PTN3.5-7	2.8	7.0	13.8	6.0	5.0	3.0	1.0	1000	导线截面:2.5~4mm ² (美国线规14~12) 最大电流: I _{max} =48A 材质:紫铜 Lead Section:2.5~4mm ² (A.W. G.14~12) Max Current:I _{max} =48A Material:Copper
PTN3.5-10		10.0	16.8						
PTN3.5-13		13.0	19.8						
PTN5.5-7	2.8	7.0	13.8	6.0	5.6	3.4	1.0	1000	导线截面:4~6mm ² (美国线规12~10) 最大电流: I _{max} =48A 材质:紫铜 Lead Section:4~6mm ² (A.W. G.12~10) Max Current:I _{max} =48A Material:Copper
PTN5.5-10		10.0	16.8						
PTN5.5-13		13.0	19.8						
PTN5.5-18		18.0	24.8						


针形裸端子 (90D)
Non-Insulated Pin Terminal
90-Degree

角度可定制
Customized design

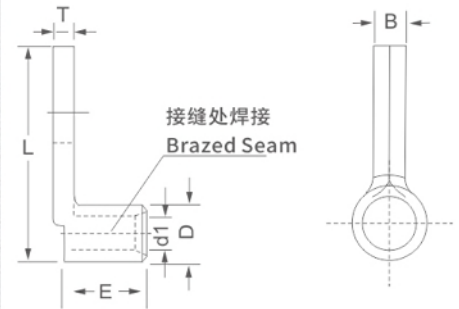


型号 ITEM NO.	尺寸 DIMENSION mm						包装 PCS/ PACK	说明 EXPLANATION
	B	L	E	D	d1	T		
PTN1.25-7-90D	1.9	9.8	6.0	3.4	1.7	0.7	1000	导线截面:0.5~1.5mm ² (美国线规22~16) 最大电流: I _{max} =19A 材质:紫铜 Lead Section:0.5~1.5mm ² (A.W. G.22~16) Max Current:I _{max} =19A Material:Copper
PTN1.25-9-90D		11.8						
PTN1.25-10-90D		12.8						
PTN1.25-12-90D		14.8						
PTN1.25-13-90D		15.8						
PTN1.25-18-90D		20.8						
PTN2-8-90D	1.9	10.8	6.2	4.1	2.3	0.8	1000	导线截面:1.5~2.5mm ² (美国线规16~14) 最大电流: I _{max} =27A 材质:紫铜 Lead Section:1.5~2.5mm ² (A.W. G.16~14) Max Current:I _{max} =27A Material:Copper
PTN2-9-90D		11.8						
PTN2-10-90D		12.8						
PTN2-12-90D		14.8						
PTN2-13-90D		15.8						
PTN2-18-90D		20.8						
PTN3.5-7-90D	2.8	11.8	7.0	5.0	3.0	1.0	1000	导线截面:2.5~4mm ² (美国线规14~12) 最大电流: I _{max} =48A 材质:紫铜 Lead Section:2.5~4mm ² (A.W. G.14~12) Max Current:I _{max} =48A Material:Copper
PTN3.5-10-90D		14.8						
PTN3.5-13-90D		17.8						
PTN5.5-7-90D	2.8	11.8	7.4	5.6	3.4	1.0	1000	导线截面:4~6mm ² (美国线规12~10) 最大电流: I _{max} =48A 材质:紫铜 Lead Section:4~6mm ² (A.W. G.12~10) Max Current:I _{max} =48A Material:Copper
PTN5.5-10-90D		14.8						
PTN5.5-13-90D		17.8						
PTN5.5-18-90D		22.8						

针形裸端子 Non-Insulated Pin Terminal

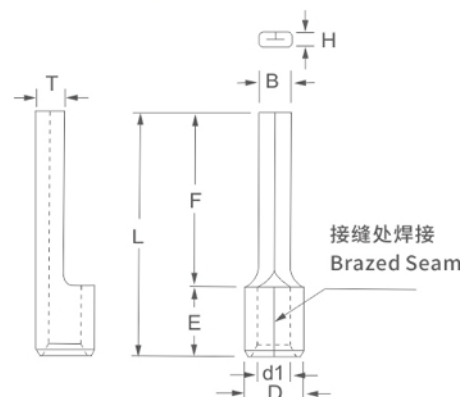

型号 ITEM NO.	尺寸 DIMENSION mm								包装 PCS/ PACK	说明 EXPLANATION
	B	F	L	E	D	d1	H	T		
PTN10-12	4.3	12.0	22.0	8.0	6.9	4.5	2.4	1.1	500	最大电流: I _{max} =62A 材质:紫铜 Max Current:I _{max} =62A Material:Copper
PTN16-13	5.5	13.0	26.0	10.0	8.4	5.8	2.8	1.2	200	最大电流: I _{max} =88A 材质:紫铜 Max Current:I _{max} =88A Material:Copper
PTN25-15	6.8	15.0	33.5	13.5	9.5	7.0	2.8	1.2	200	最大电流: I _{max} =115A 材质:紫铜 Max Current:I _{max} =115A Material:Copper
PTN35-20	8.0	20.0	40.5	16.0	11.8	8.4	3.2	1.5	200	最大电流: I _{max} =160A 材质:紫铜 Max Current:I _{max} =160A Material:Copper
PTN50-20	9.5	20.0	45.0	19.0	13.6	9.6	3.8	1.8	100	最大电流: I _{max} =215A 材质:紫铜 Max Current:I _{max} =215A Material:Copper
PTN70-25	11.0	23.0	55.5	24.0	15.8	11.4	4.4	2.0	50	最大电流: I _{max} =235A 材质:紫铜 Max Current:I _{max} =235A Material:Copper
PTN95-25	12.5	23.0	55.5	24.0	18.9	13.5	5.7	2.5	50	最大电流: I _{max} =255A 材质:紫铜 Max Current:I _{max} =255A Material:Copper

针形裸端子 (90D) Non-Insulated Pin Terminal 90-Degree

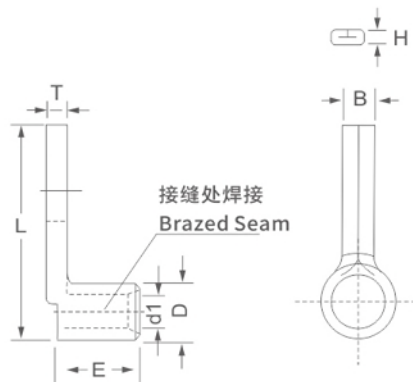


角度可定制 Customized design

型号 ITEM NO.	尺寸 DIMENSION mm							包装 PCS/ PACK	说明 EXPLANATION
	B	L	E	D	d1	H	T		
PTN10-12-90D	4.3	19.5	8.6	7.2	4.5	2.4	1.1	500	最大电流: I _{max} =62A 材质:紫铜 Max Current:I _{max} =62A Material:Copper
PTN16-13-90D	5.5	23.5	10.8	9.0	5.8	2.8	1.2	200	最大电流: I _{max} =88A 材质:紫铜 Max Current:I _{max} =88A Material:Copper
PTN25-15-90D	6.8	31.0	12.0	11.5	7.0	2.8	1.2	200	最大电流: I _{max} =115A 材质:紫铜 Max Current:I _{max} =115A Material:Copper
PTN35-20-90D	8.0	36.5	14.0	13.5	8.4	3.2	1.5	200	最大电流: I _{max} =160A 材质:紫铜 Max Current:I _{max} =160A Material:Copper
PTN50-20-90D	9.5	42.0	18.0	15.5	9.6	3.8	1.8	100	最大电流: I _{max} =215A 材质:紫铜 Max Current:I _{max} =215A Material:Copper
PTN70-25-90D	11.0	52.5	18.0	17.5	11.4	4.4	2.0	50	最大电流: I _{max} =235A 材质:紫铜 Max Current:I _{max} =235A Material:Copper
PTN95-25-90D	12.5	52.5	20.0	19.5	13.5	5.7	2.5	50	最大电流: I _{max} =255A 材质:紫铜 Max Current:I _{max} =255A Material:Copper



针形 (双压式尼龙) 绝缘端子
Nylon-Insulated
Double Crimp Pin Terminal



型号 ITEM NO.	尺寸 DIMENSION mm							包装 PCS/ PACK	颜色 COLOR	说明 EXPLANATION
	B	F	L	E	D	d1	T			
PTNYD1.25-7	1.9	7.0	17.8	10.7	5.8	4.8	0.7	1000	● 红 Red	导线截面:0.5~1.5mm ² (美国线规22~16) 最大电流: I _{max} =19A 材质:紫铜 绝缘套管: 尼龙(PA66) 绝缘套管加铜套 耐温: 105°C 电压: 400V Lead Section:0.5~1.5mm ² (A.W. G.22-16) Max Current:I _{max} =19A Material:Copper Insulation: Nylon(PA66) Copper Tube with Sleeve Temperature :105°C Voltage: 400V
PTNYD1.25-9		9.0	19.8							
PTNYD1.25-10		10.0	20.8							
PTNYD1.25-12		12.0	22.8							
PTNYD1.25-13		13.0	23.8							
PTNYD1.25-18		18.0	28.8							
PTNYD2-8	1.9	8.0	18.0	11.0	6.8	5.5	0.8	1000	● 蓝 Blue	导线截面:1.5~2.5mm ² (美国线规16~14) 最大电流: I _{max} =27A 材质:紫铜 绝缘套管: 尼龙(PA66) 绝缘套管加铜套 耐温: 105°C 电压: 400V Lead Section:1.5~2.5mm ² (A.W. G.16-14) Max Current:I _{max} =27A Material:Copper Insulation: Nylon(PA66) Copper Tube with Sleeve Temperature :105°C Voltage: 400V
PTNYD2-9		9.0	20.0							
PTNYD2-10		10.0	21.0							
PTNYD2-12		12.0	23.0							
PTNYD2-13		13.0	24.0							
PTNYD2-18		18.0	29.0							
PTNYD5.5-7	2.8	7.0	21.8	14.2	8.6	7.2	1.0	500	● 黄 Yellow	导线截面:4~6mm ² (美国线规12~10) 最大电流: I _{max} =48A 材质:紫铜 绝缘套管: 尼龙(PA66) 绝缘套管加铜套 耐温: 105°C 电压: 400V Lead Section:4~6mm ² (A.W. G.12-10) Max Current:I _{max} =48A Material:Copper Insulation: Nylon(PA66) Copper Tube with Sleeve Temperature :105°C Voltage: 400V
PTNYD5.5-10		10.0	24.8							
PTNYD5.5-13		13.0	27.8							
PTNYD5.5-18		18.0	32.8							