


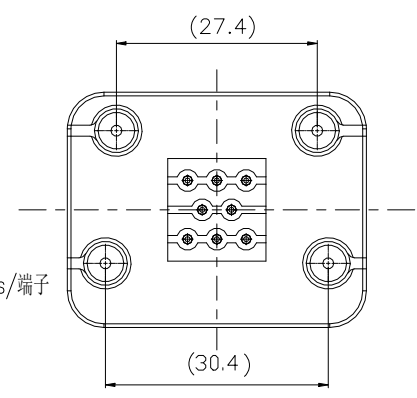
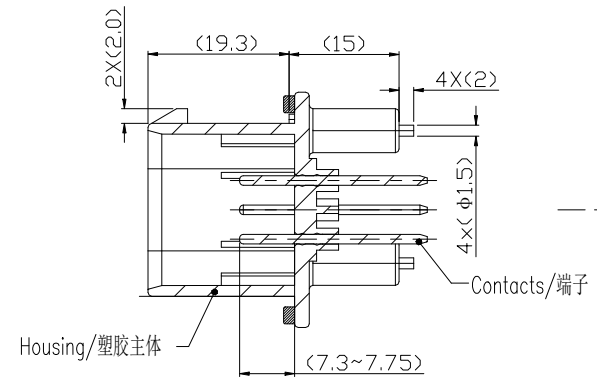
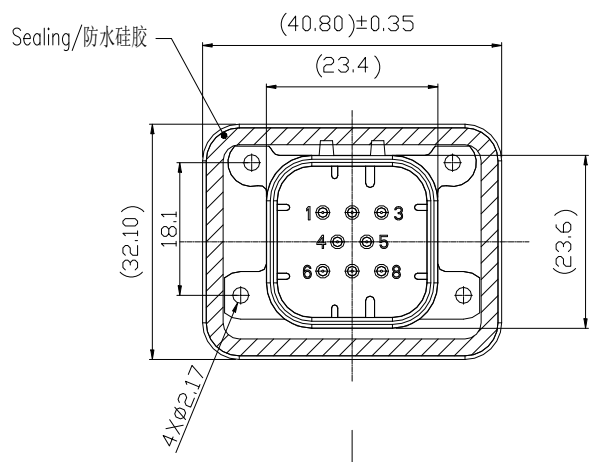


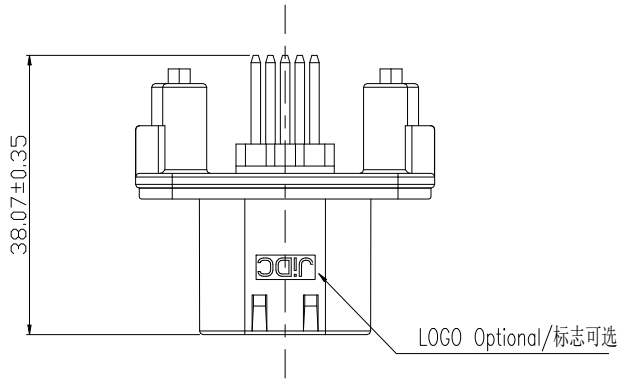


REV.	DESCRIPTION	DESIGN	APPROVAL	DATE
A0	NEW VERSION	Dong	Jerry	2023.12.01
A1	新增带济德LOGO料号/Add material number with JD LOGO	Yuan	Jerry	2024/08/02



X.± 0.35	X.*± 3°		Guangdong JiDe Precision Electronics Co., Ltd		
.X± 0.25	.X.*± 2°		广东济德精密电子有限公司		
.XX± 0.15	.XX.*± 1°				
.XXX± 0.10	.XXX.*±				
UNITS:	mm	TITLE:		PART NO.	
		8 Pin vertical ,with flange seal		99X-08X-X067	
The information in this document is property of JIDCON company and should not be copied or reproduced in any other way, without written permission.		APPD:		DWG NO:	
		CHKD:		C-99X-08X-X067	
		DRAW:			
				SCALE	SHEET
				N/A	1/3
				REV.	A1

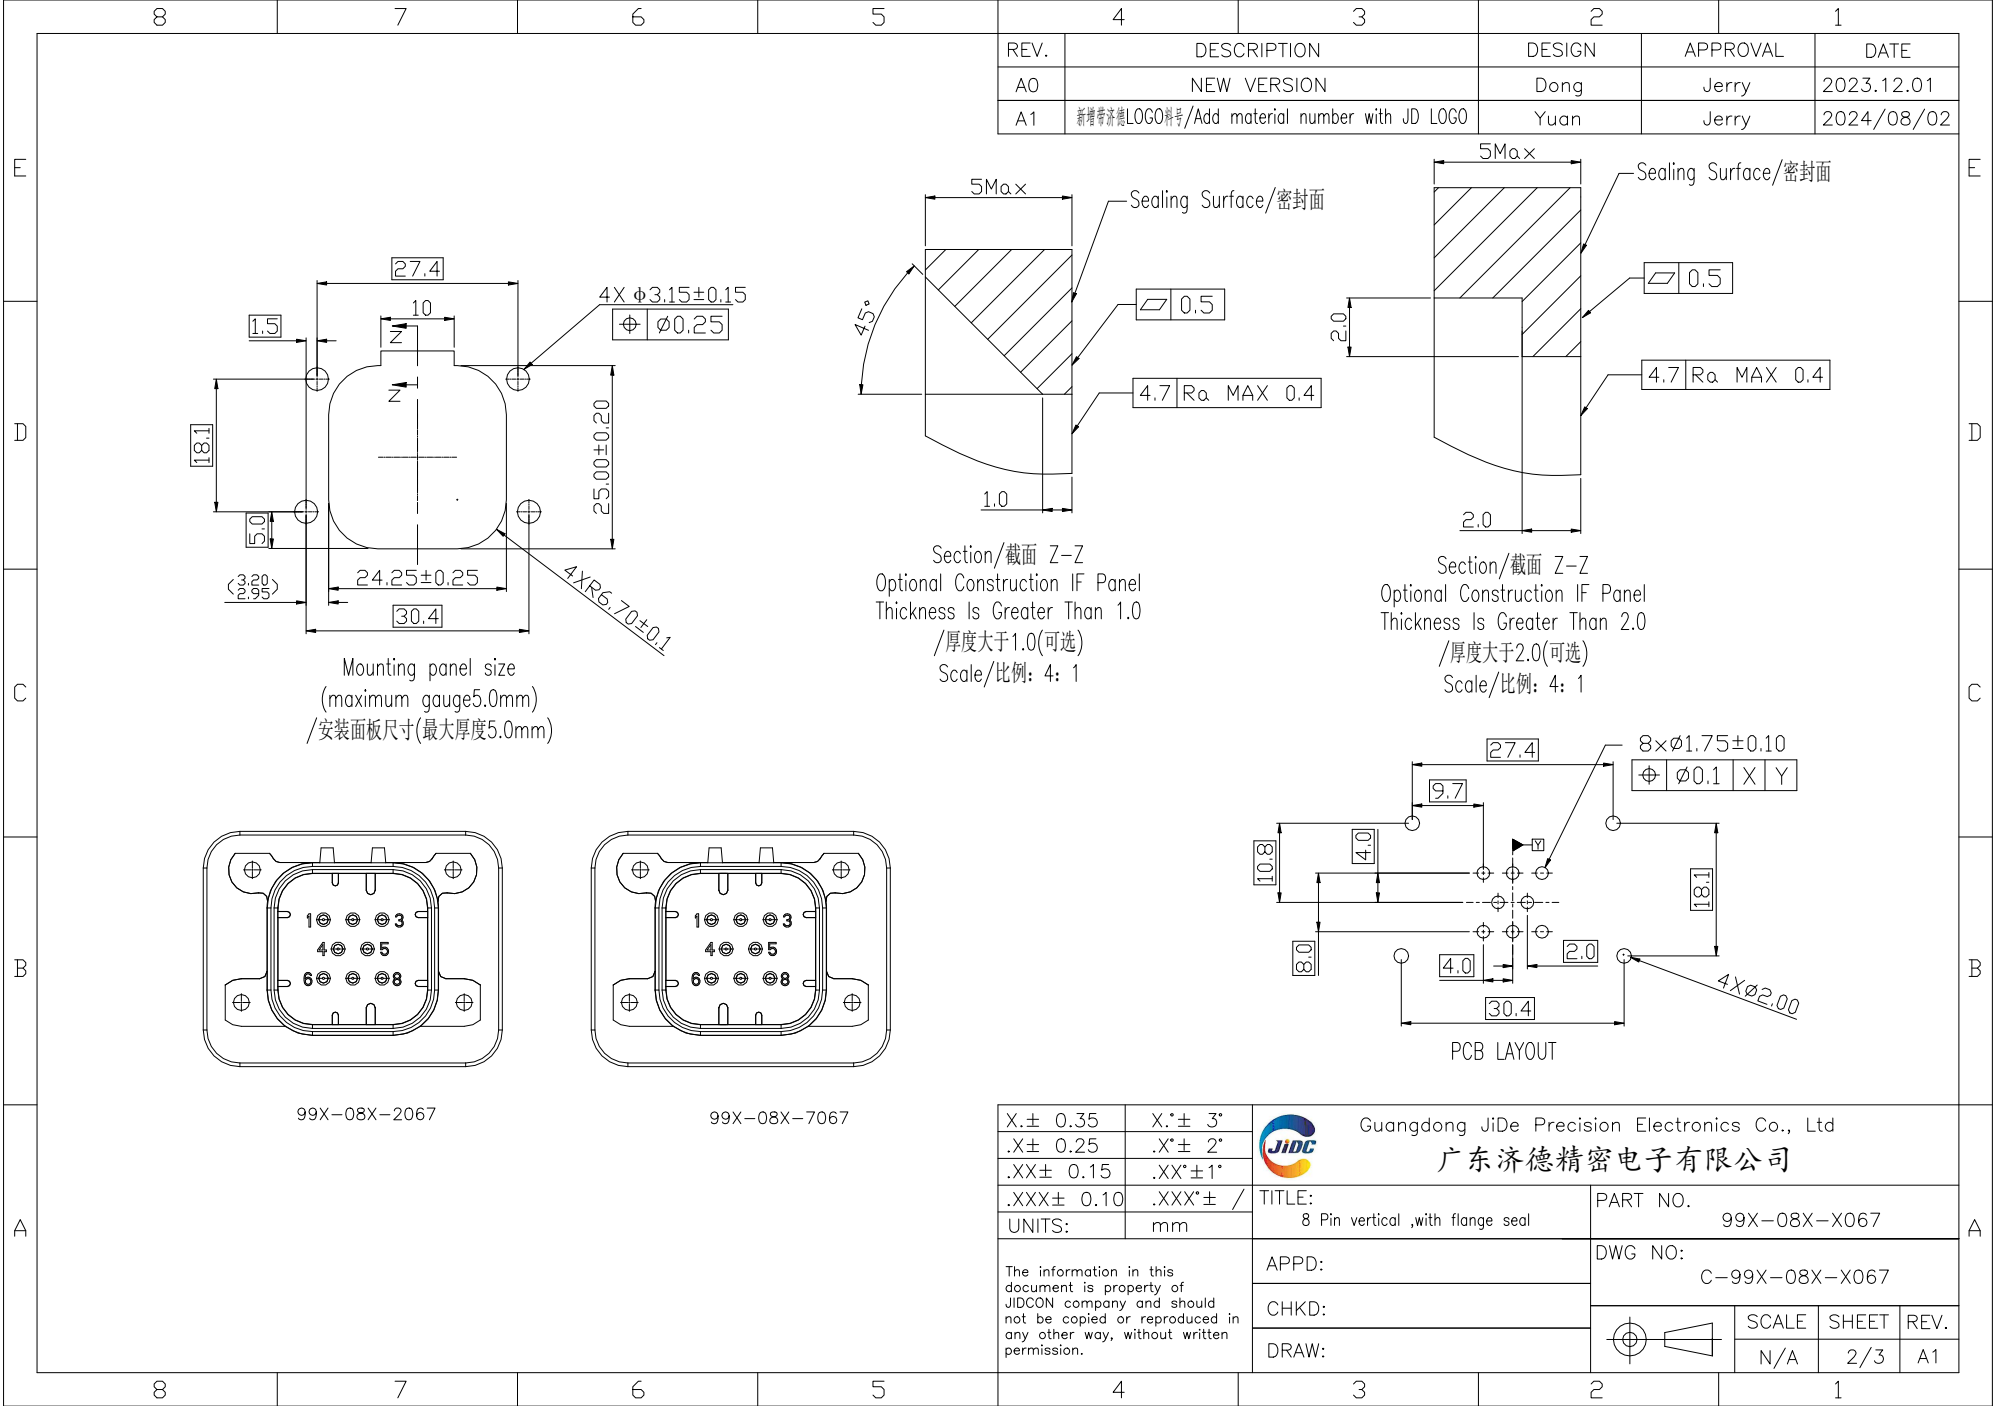

E	Without JIDC LOGO Material Specification/无济德LOGO物料规格表				REV.		DESCRIPTION		DESIGN		APPROVAL		DATE	
					A0		NEW VERSION		Dong		Jerry		2023.12.01	
					A1		新增带济德LOGO料号/Add material number with JD LOGO		Yuan		Jerry		2024/08/02	
D														
C	WITH JIDC LOGO Material Specification/有济德LOGO物料规格表:													
B														
A														

NO	Part number (With seal)	Part number (Without seal)	Color	Plating
1	992-081-2067	991-081-2067	Black	Tin
2	992-083-2067	991-083-2067		Gold
3	992-081-7067	991-081-7067	Natural	Tin
4	992-083-7067	991-083-7067		Gold

NO	Part number (With seal)	Part number (Without seal)	Color	Plating
1	992-081-2067-1	991-081-2067-1	Black	Tin
2	992-083-2067-1	991-083-2067-1		Gold
3	992-081-7067-1	991-081-7067-1	Natural	Tin
4	992-083-7067-1	991-083-7067-1		Gold

Connector plug
/连接器插头

Mounting panel/安装面板

4个安装螺丝/4 mounting screws
torque/扭矩: 0.6N.m-0.8N.m

Flat panel mounting/面板安装平整

Performance parameters/性能参数:

1. Material/材质:
Housing/塑胶主体: High temperature resistant fireproof resin/耐高温防火树脂: UL94-V0
Contacts/端子: brass/铜合金, tinned or gold plated/镀锡或镀金

2. Rated current/额定电流: 8A (Tin/镀锡); 17A (Au/镀金); Rated voltage/额定电压: 250V AC

3. Operating temperature/操作温度: -40°C~+105°C (Tin/镀锡); -40°C~+125°C (Au/镀金);

4. Insulation voltage/耐压: 1000V AC,
insulation resistance greater than 1000MΩ 绝缘电阻大于100MΩ


5. The leakage current under 48V DC voltage is less than 50mA;

6. If the service life is greater than 100 times, the insertion and removal force is less than 50N;

7. Meet the neutral salt spray test for 48 hours (35±2°C)
/满足中性盐雾测试48小时 (35±2°C);

8. Mounting screws are 3.0 self-tapping screws with torque range
0.6N.m-0.8N.m/安装螺钉采用3.0自攻螺丝, 扭矩范围0.6N.m-0.8N.m

9. RoHS Compliance /产品符合RoHS

X.± 0.35	X.*± 3"		Guangdong JiDe Precision Electronics Co., Ltd			
.X± 0.25	.X*± 2"		广东济德精密电子有限公司			
.XX± 0.15	.XX*± 1"					
.XXX± 0.10	.XXX*± /					
UNITS:	mm	TITLE: 8Pin vertical ,with flange seal		PART NO. 99X-08X-X067		
The information in this document is property of JIDCON company and should not be copied or reproduced in any other way, without written permission.		APPD:		DWG NO: C-99X-08X-X067		
		CHKD:				
		DRAW:				
				SCALE N/A	SHEET 3/3	REV. A1