





公 (尼龙) 绝缘接头
Nylon-Insulated
Male Connector



型号 ITEM NO .	接插规格 Nema Tab	尺寸 DIMENSION mm						包装 PCS/ PACK	颜色 COLOR	说明 EXPLANATION
		B	L	E	D	d1	T			
MNY1.25-110(5)	0.5×2.8	2.8	18.7	11.0	3.8	1.7	0.5	1000	 红Red	导线截面:0.5~1.5mm ² (美国线规22~16) 最大电流: I _{max} =19A 材质:黄铜 绝缘套管: 尼龙(PA66) Lead Section:0.5~1.5mm ² (A.W. G.22~16) Max Current:I _{max} =19A Material:Brass Insulation: Nylon(PA66)
MNY1.25-110(8)	0.8×2.8						0.8			
MNY1.25-187(5)	0.5×4.75	4.75	21.0				0.5			
MNY1.25-187(8)	0.8×4.75						0.4×2			
MNY1.25-187(8L)	0.8×4.75	4.75	21.0	11.0	4.3	2.3	0.8			
MNY1.25-250	0.8×6.35	6.35	22.0	11.0	3.8	1.7	0.4×2			
MNY2-110(5)	0.5×2.8	2.8	18.7	11.0	4.3	2.3	0.5	1000	 蓝Blue	导线截面:1.5~2.5mm ² (美国线规16~14) 最大电流: I _{max} =27A 材质:黄铜 绝缘套管: 尼龙(PA66) Lead Section:1.5~2.5mm ² (A.W. G.16~14) Max Current:I _{max} =27A Material:Brass Insulation: Nylon(PA66)
MNY2-110(8)	0.8×2.8						0.8			
MNY2-187(5)	0.5×4.75	4.75	21.0				0.5			
MNY2-187(8)	0.8×4.75						0.4×2			
MNY2-187(8L)	0.8×4.75	4.75	21.0			3.4	0.8			
MNY2-250	0.8×6.35	6.35	22.0			2.3	0.4×2			
MNY5.5-110(5)	0.5×2.8	2.8	21.0	13.0	5.7	3.4	0.5	1000	 黄Yellow	导线截面:4~6mm ² (美国线规12~10) 最大电流: I _{max} =48A 材质:黄铜 绝缘套管: 尼龙(PA66) Lead Section:4~6mm ² (A.W. G.12~10) Max Current:I _{max} =48A Material:Brass Insulation: Nylon(PA66)
MNY5.5-110(8)	0.8×2.8						0.8			
MNY5.5-187(5)	0.5×4.75	4.75	23.0				0.5			
MNY5.5-187(8)	0.8×4.75						0.4×2			
MNY5.5-250	0.8×6.35	6.35	24.0				0.4×2	500		



公 (双压式尼龙) 绝缘接头
Nylon-Insulated Double
Crimp Male Connector

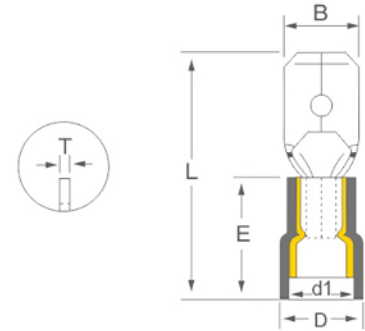

型号 ITEM NO .	接插规格 Nema Tab	尺寸 DIMENSION mm						包装 PCS/ PACK	颜色 COLOR	说明 EXPLANATION
		B	L	E	D	d1	T			
MNYD1.25-110(5)	0.5×2.8	2.8	17.7	10.7	5.8	4.3	0.5	1000	 红Red	导线截面:0.5~1.5mm ² (美国线规22~16) 最大电流: I _{max} =19A 材质:黄铜 绝缘套管: 尼龙(PA66) 绝缘套管加铜套 耐温: 105℃ 电压: 400V Lead Section:0.5~1.5mm ² (A.W. G.22-16) Max Current:I _{max} =19A Material:Brass Insulation: Nylon(PA66) Copper Tube with Sleeve Temperature :105℃ Voltage: 400V
MNYD1.25-110(8)	0.8×2.8						0.8			
MNYD1.25-187(5)	0.5×4.75	4.75	20.0				0.5			
MNYD1.25-187(8)	0.8×4.75						0.4×2			
MNYD1.25-187(8L)	0.8×4.75						0.8			
MNYD1.25-250	0.8×6.35	6.35	21.0				0.4×2			
MNYD2-110(5)	0.5×2.8	2.8	17.7	10.7	6.2	4.5	0.5	1000	 蓝Blue	导线截面:1.5~2.5mm ² (美国线规16~14) 最大电流: I _{max} =27A 材质:黄铜 绝缘套管: 尼龙(PA66) 绝缘套管加铜套 耐温: 105℃ 电压: 400V Lead Section:1.5~2.5mm ² (A.W. G.16-14) Max Current:I _{max} =27A Material:Brass Insulation: Nylon(PA66) Copper Tube with Sleeve Temperature :105℃ Voltage: 400V
MNYD2-110(8)	0.8×2.8						0.8			
MNYD2-187(5)	0.5×4.75	4.75	20.0				0.5			
MNYD2-187(8)	0.8×4.75						0.4×2			
MNYD2-187(8L)	0.8×4.75						0.8			
MNYD2-250	0.8×6.35	6.35	21.0				0.4×2			
MNYD5.5-110(5)	0.5×2.8	2.8	20.0	14.4	8.4	7.0	0.5	1000	 黄Yellow	导线截面:4~6mm ² (美国线规12~10) 最大电流: I _{max} =48A 材质:黄铜 绝缘套管: 尼龙(PA66) 绝缘套管加铜套 耐温: 105℃ 电压: 400V Lead Section:4~6mm ² (A.W. G.12-10) Max Current:I _{max} =48A Material:Brass Insulation: Nylon(PA66) Copper Tube with Sleeve Temperature :105℃ Voltage: 400V
MNYD5.5-110(8)	0.8×2.8						0.8			
MNYD5.5-187(5)	0.5×4.75	4.75	22.0				0.5			
MNYD5.5-187(8)	0.8×4.75						0.4×2			
MNYD5.5-250	0.8×6.35	6.35	23.0				0.4×2	500		