



MBR40200PT

Schottky Barrier Rectifiers

Features

- ◆ The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- ◆ Construction utilizes void-free molded plastic technique
- ◆ Low reverse leakage
- ◆ High forward surge current capability
- ◆ High temperature soldering guaranteed
250°C/10 seconds at terminals

Mechanical Data

Case : Molded plastic body

Terminals : Solder plated, solderable per MIL-STD-750, Method 2026

Polarity : Polarity symbol marking on body

Mounting Position : Any

Maximum Ratings And Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified. Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.





Parameter	SYMBOLS	MBR40200PT	UNITS
Maximum repetitive peak reverse voltage	V_{RRM}	200	V
Working Peak Reverse Voltage	V_{RWM}	200	V
Maximum DC blocking voltage	V_{DC}	200	V
Maximum average forward rectified current at $T_c=25^\circ\text{C}$ per device per diode	$I_{(O)}$	40.0 20.0	A
Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load	I_{FSM}	270.0	A
Maximum instantaneous forward voltage per diode at 20.0A	V_F	0.92	V
Maximum DC reverse current at rated DC blocking voltage $T_A=25^\circ\text{C}$ $T_A=125^\circ\text{C}$	I_R	0.02 5	mA
Typical thermal resistance	$R_{\theta JC}$	1.1	$^\circ\text{C/W}$
Operating junction temperature range	T_J	175	$^\circ\text{C}$
Storage temperature range	T_{STG}	-55 to +150	$^\circ\text{C}$



MBR40200PT

Schottky Barrier Rectifiers

Ratings And Characteristic Curves

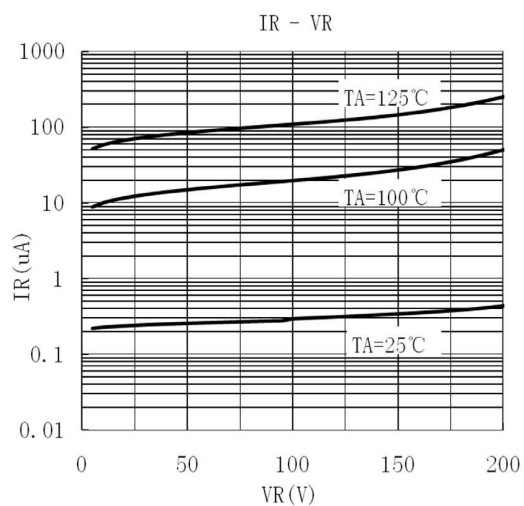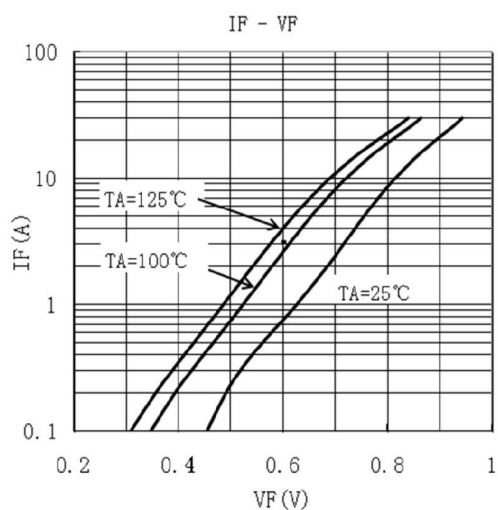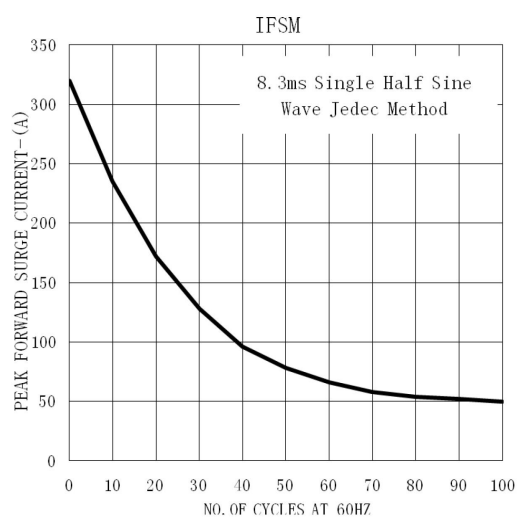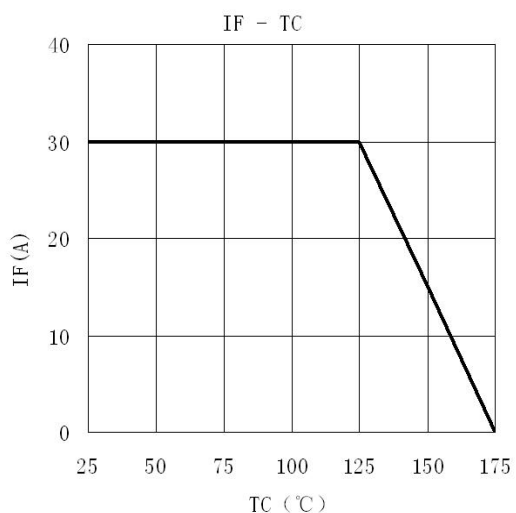



MBR40200PT

Schottky Barrier Rectifiers

TO-247S

T0-247

单位: mm

