

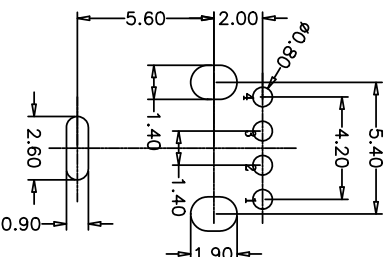
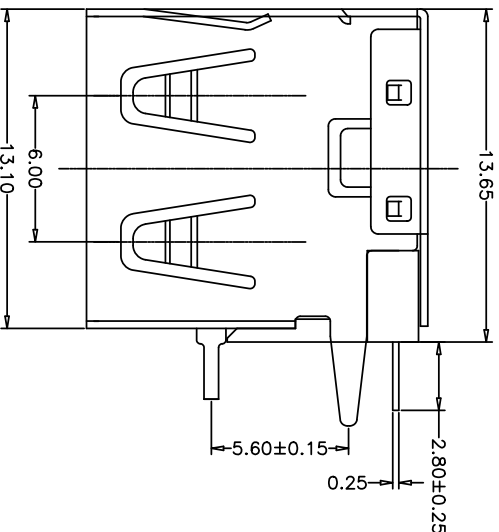
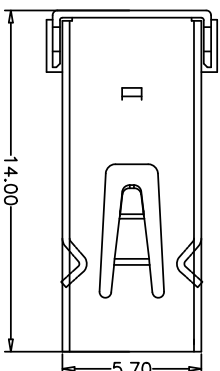


RoHS

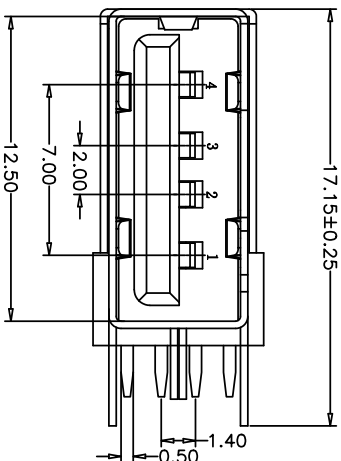

RECOMMENDED PCB LAYOUT

GENERAL TOLERANCES: ±0.05

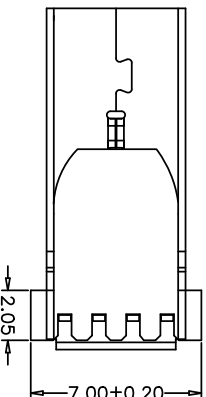

电气特性:Electrical:

- 额定电流: Current Rating
1.5A/contact terminal
- 额定电压: Voltage Rating
30V DC
- 接触阻抗:Contact Resistance
30 milliohms MAX
- 耐电压:Dielectric Withstanding Voltage:
500 V AC AT Sea level
- 绝缘阻抗:Insulation Resistance:
1000MEGA ohms MIN

物理性能:Mechanical:

- 插拔力: Connector Mate and Unmate Force
Mate force:3.57kgf (MAX)
Unmate force:0.7kgf (MIN)
- 端子保持力: Terminal Retention
1.0kgf (MIN)
- 寿命: 1500次
原材料:Matorial:
- 塑胶:Housing:pbt/LCP
- 端子:Contact:Copper Alloy C2680
- 外壳:Shell:SPCC/C2680
- 电镀:Finish:
- 端子Contact: Au G/F u" Plated on contact area
Tin50u" Plated on solder area
Nickel 50u" Plated underplating over all.
- 外壳Shell: Nickel 50u"Min plating over all.

产品图

PRODUCT CHART DWG

PIN NUMBER	SIGNAL NAME
1	VBUS
2	D-
3	D+
4	GND

公差一览表

TOLERANCE UNLESS OTHERWISE

公差一览表

单位

UNITS

MM

比例

SCALE

日期

2021/03/10

审核

CHD

产品料号

PRODUCT PART NO.

906-161A1011D10200

产品名称

PRODUCT NO.

AF14.0 侧插板三直脚无边壳白胶

角法

角法

版本

VER

A0

深圳市精拓金电子有限公司

目錄

MAPX

變更內容

MODIFICATION

日期

DATE

您正在使用 ZWCAD 2022 个人版，不得用于商业用途，详情请咨询4005-182-598。