

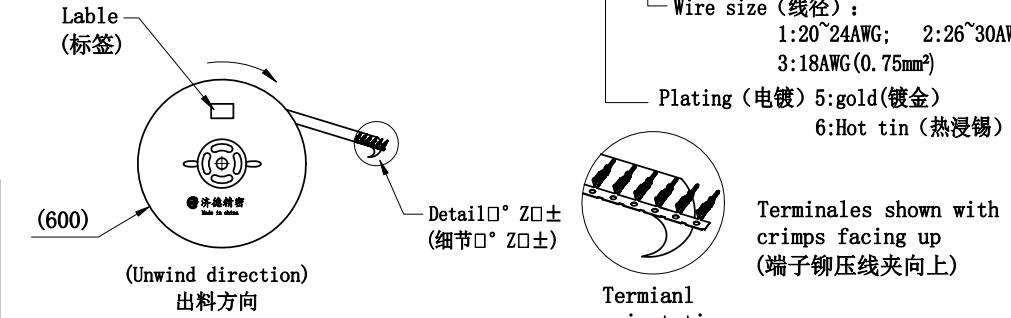
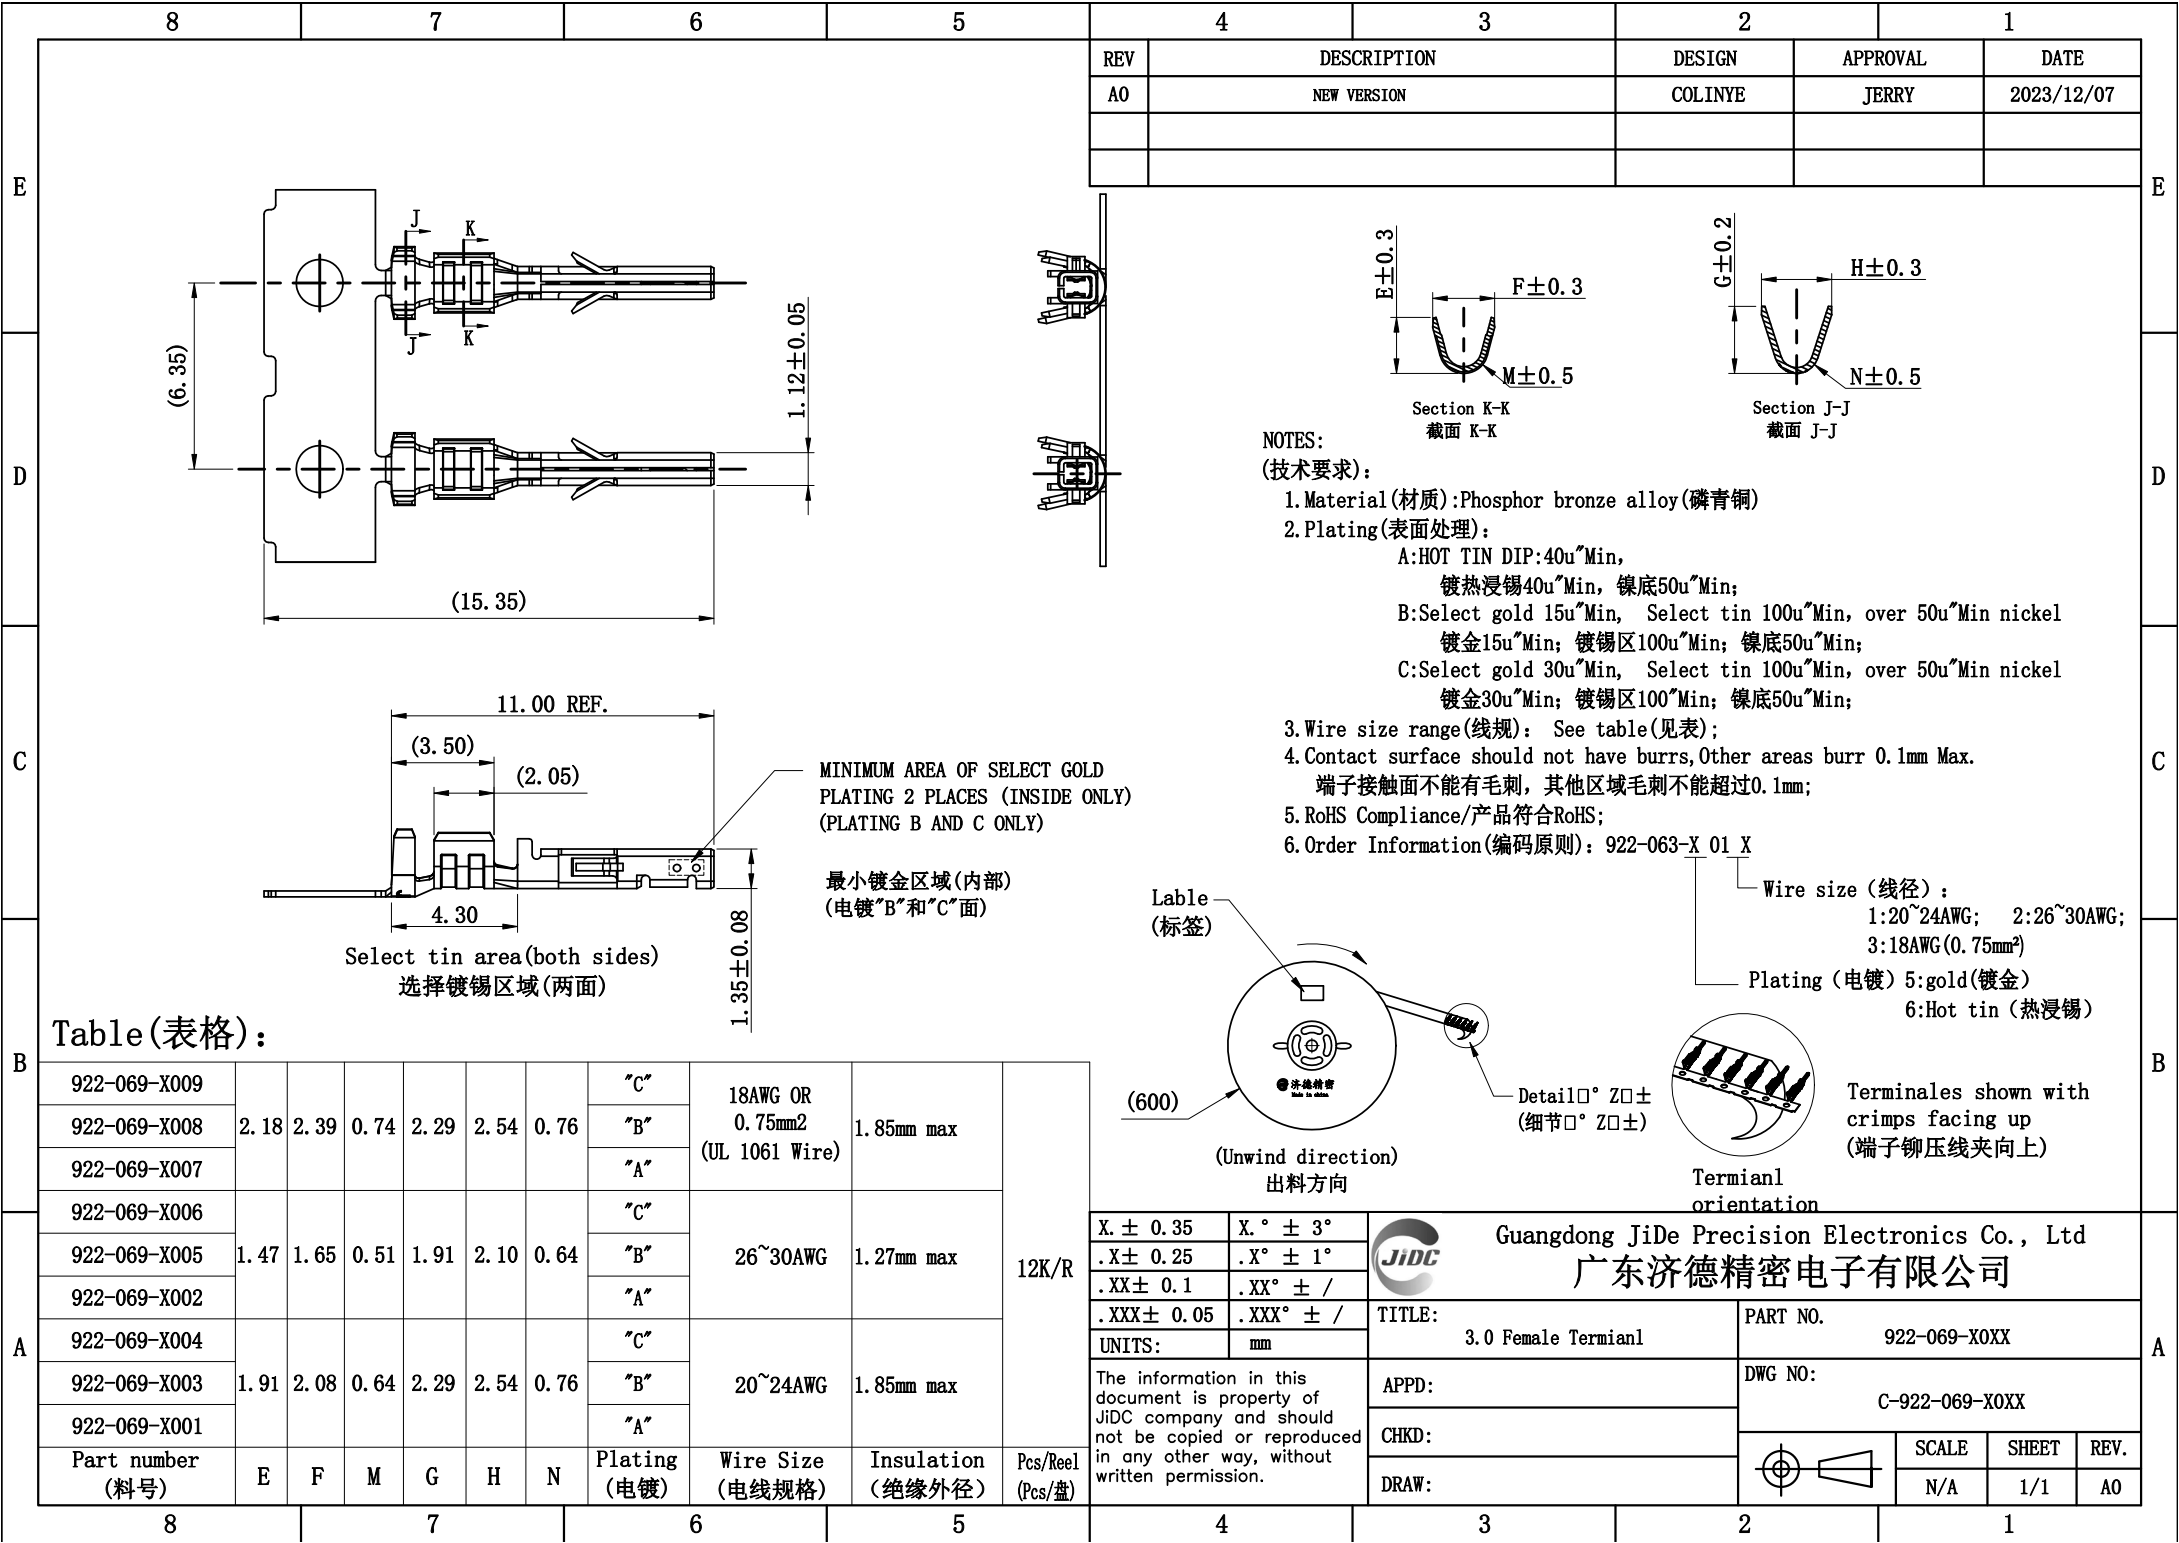



Table (表格):

922-069-X009							"C"	18AWG OR 0.75mm ² (UL 1061 Wire)	1.85mm max	12K/R
922-069-X008	2.18	2.39	0.74	2.29	2.54	0.76	"B"			
922-069-X007							"A"			
922-069-X006							"C"	26~30AWG	1.27mm max	12K/R
922-069-X005	1.47	1.65	0.51	1.91	2.10	0.64	"B"			
922-069-X002							"A"			
922-069-X004							"C"	20~24AWG	1.85mm max	12K/R
922-069-X003	1.91	2.08	0.64	2.29	2.54	0.76	"B"			
922-069-X001							"A"			
Part number (料号)	E	F	M	G	H	N	Plating (电镀)	Wire Size (电线规格)	Insulation (绝缘外径)	Pcs/Reel (Pcs/盘)

X. ± 0.35	X. ° ± 3°		Guangdong JiDe Precision Electronics Co., Ltd 广东济德精密电子有限公司				
.X ± 0.25	.X° ± 1°						
.XX ± 0.1	.XX° ± /						
.XXX ± 0.05	.XXX° ± /						
UNITS:	mm	TITLE: 3.0 Female Termianl		PART NO. 922-069-X0XX			
The information in this document is property of JiDC company and should not be copied or reproduced in any other way, without written permission.		APPD:		DWG NO: C-922-069-X0XX			
		CHKD:					
		DRAW:			SCALE	SHEET	REV.
					N/A	1/1	A0