



母 (尼龙) 全绝缘接头  
Fully-Nylon-Insulated  
Female Connector




| 型号<br>ITEM NO . | 接插规格<br>Nema Tab | 尺寸<br>DIMENSION mm |      |      |     |     |      | 包装<br>PCS/<br>PACK | 颜色<br>COLOR                                                                                    | 说明<br>EXPLANATION                                                                                                                      |     |     |                                                                                                  |  |  |  |
|-----------------|------------------|--------------------|------|------|-----|-----|------|--------------------|------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------|-----|-----|--------------------------------------------------------------------------------------------------|--|--|--|
|                 |                  | B                  | L    | E    | D   | d1  | T    |                    |                                                                                                |                                                                                                                                        |     |     |                                                                                                  |  |  |  |
| FDFN1.25-110(5) | 0.5×2.8          | 4.3                | 18.8 | 11.0 | 4.0 | 1.7 | 0.3  | 1000               | <br>红Red    | 材质:黄铜<br>绝缘套管: 尼龙(PA66)<br>耐温: 105℃<br>电压: 400V<br><br>Material:Brass<br>Insulation: Nylon(PA66)<br>Temperature :105℃<br>Voltage: 400V |     |     |                                                                                                  |  |  |  |
| FDFN1.25-110(8) | 0.8×2.8          |                    |      |      |     |     | 0.35 |                    |                                                                                                |                                                                                                                                        |     |     |                                                                                                  |  |  |  |
| FDFN1.25-187(5) | 0.5×4.75         | 5.8                | 20.5 |      |     |     |      |                    |                                                                                                |                                                                                                                                        |     |     |                                                                                                  |  |  |  |
| FDFN1.25-187(8) | 0.8×4.75         |                    | 0.4  |      |     |     |      |                    |                                                                                                |                                                                                                                                        |     |     |                                                                                                  |  |  |  |
| FDFN1.25-250    | 0.8×6.35         | 8.4                | 22.6 |      |     |     | 0.4  |                    |                                                                                                |                                                                                                                                        |     |     |                                                                                                  |  |  |  |
| FDFN2-187(5)    | 0.5×4.75         | 6.2                | 20.7 | 11.0 | 4.0 | 2.3 | 0.35 | 1000               | <br>蓝Blue |                                                                                                                                        |     |     |                                                                                                  |  |  |  |
| FDFN2-187(8)    | 0.8×4.75         |                    |      |      |     |     | 0.4  |                    |                                                                                                |                                                                                                                                        |     |     |                                                                                                  |  |  |  |
| FDFN2-250       | 0.8×6.35         | 8.4                | 22.6 |      |     |     |      |                    |                                                                                                |                                                                                                                                        |     |     |                                                                                                  |  |  |  |
| FDFN5.5-250     | 0.8×6.35         | 8.6                | 24.0 |      |     |     | 13.0 | 6.3                | 3.4                                                                                            |                                                                                                                                        | 0.4 | 500 | <br>黄Yellow |  |  |  |

公 (尼龙) 全绝缘接头  
Fully-Nylon-Insulated  
Male Connector



| 型号<br>ITEM NO . | 接插规格<br>Nema Tab | 尺寸<br>DIMENSION mm |      |      |     |     |     | 包装<br>PCS/<br>PACK | 颜色<br>COLOR | 说明<br>EXPLANATION                                                                                                              |
|-----------------|------------------|--------------------|------|------|-----|-----|-----|--------------------|-------------|--------------------------------------------------------------------------------------------------------------------------------|
|                 |                  | B                  | L    | E    | D   | d1  | T   |                    |             |                                                                                                                                |
| MDFN1.25-250    | 0.8×6.35         | 6.35               | 24.0 | 11.0 | 4.0 | 1.7 | 0.4 | 500                | 红Red        | 材质:黄铜 绝缘套管: 尼龙(PA66)<br>耐温: 105°C 电压: 400V<br>Material:Brass<br>Insulation: Nylon(PA66)<br>Temperature :105°C<br>Voltage: 400V |
| MDFN2-250       | 0.8×6.35         | 6.35               | 24.0 | 11.0 | 4.5 | 2.3 | 0.4 | 500                | 蓝Blue       |                                                                                                                                |
| MDFN5.5-250     | 0.8×6.35         | 6.35               | 25.0 | 13.0 | 6.3 | 3.4 | 0.4 | 500                | 黄Yellow     |                                                                                                                                |


母 (尼龙) 全绝缘接头  
Fully-Nylon-Insulated  
Female Connector

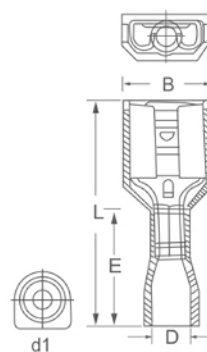

| 型号<br>ITEM NO .  | 接插规格<br>Nema Tab | 尺寸<br>DIMENSION mm |      |      |     |     |     | 包装<br>PCS/<br>PACK | 颜色<br>COLOR                                                                                      | 说明<br>EXPLANATION                                                                                                                      |  |
|------------------|------------------|--------------------|------|------|-----|-----|-----|--------------------|--------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------|--|
|                  |                  | B                  | L    | E    | D   | d1  | T   |                    |                                                                                                  |                                                                                                                                        |  |
| FDFNA1.25-110(5) | 0.5×2.8          | 3.8                | 18.8 | 11.0 | 5.9 | 1.7 | 0.5 | 1000               | <br>红Red      | 材质:黄铜<br>绝缘套管: 尼龙(PA66)<br>耐温: 105℃<br>电压: 400V<br><br>Material:Brass<br>Insulation: Nylon(PA66)<br>Temperature :105℃<br>Voltage: 400V |  |
| FDFNA1.25-110(8) | 0.8×2.8          |                    |      |      |     |     | 0.8 |                    |                                                                                                  |                                                                                                                                        |  |
| FDFNA1.25-187(5) | 0.5×4.75         | 5.8                | 20.5 |      |     |     | 0.5 |                    |                                                                                                  |                                                                                                                                        |  |
| FDFNA1.25-187(8) | 0.8×4.75         |                    |      |      |     |     | 0.8 |                    |                                                                                                  |                                                                                                                                        |  |
| FDFNA1.25-250    | 0.8×6.35         | 7.5                | 22.6 |      |     |     | 0.4 |                    |                                                                                                  |                                                                                                                                        |  |
| FDFNA2-187(5)    | 0.5×4.75         | 5.8                | 20.7 | 11.0 | 6.6 | 2.3 | 0.5 | 1000               | <br>蓝Blue   |                                                                                                                                        |  |
| FDFNA2-187(8)    | 0.8×4.75         |                    |      |      |     |     | 0.8 |                    |                                                                                                  |                                                                                                                                        |  |
| FDFNA2-250       | 0.8×6.35         | 7.5                | 22.6 |      |     |     | 0.4 |                    |                                                                                                  |                                                                                                                                        |  |
| FDFNA5.5-250     | 0.8×6.35         | 7.5                | 24.0 | 13.0 | 8.0 | 3.4 | 0.4 | 500                | <br>黄Yellow |                                                                                                                                        |  |

尼龙绝缘端子系列  
Nylon-Insulated  
Terminal Series


公 (尼龙) 全绝缘接头  
Fully-Nylon-Insulated  
Male Connector

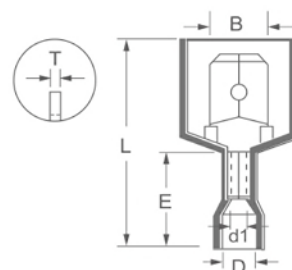

| 型号<br>ITEM NO .  | 接插规格<br>Nema Tab | 尺寸<br>DIMENSION mm |      |      |     |     |     | 包装<br>PCS/<br>PACK | 颜色<br>COLOR | 说明<br>EXPLANATION                                                                |
|------------------|------------------|--------------------|------|------|-----|-----|-----|--------------------|-------------|----------------------------------------------------------------------------------|
|                  |                  | B                  | L    | E    | D   | d1  | T   |                    |             |                                                                                  |
| MDFNA1.25-187(5) | 0.5×4.75         | 5.8                | 20.5 | 11.0 | 3.5 | 1.7 | 0.5 | 500                | 红Red        | 材质:黄铜<br>绝缘套管: 尼龙(PA66)<br>耐温: 105°C<br>电压: 400V                                 |
| MDFNA1.25-187(8) | 0.8×4.75         | 5.8                | 20.5 | 11.0 | 3.5 | 1.7 | 0.8 |                    |             |                                                                                  |
| MDFNA1.25-250    | 0.8×6.35         | 8.4                | 22.6 | 13.0 | 3.6 | 1.7 | 0.4 |                    |             |                                                                                  |
| MDFNA2-187(5)    | 0.5×4.75         | 6.2                | 20.7 | 11.0 | 4.0 | 2.3 | 0.5 | 500                | 蓝Blue       | Material:Brass<br>Insulation: Nylon(PA66)<br>Temperature :105°C<br>Voltage: 400V |
| MDFNA2-187(8)    | 0.8×4.75         | 6.2                | 20.7 | 11.0 | 4.0 | 2.3 | 0.8 |                    |             |                                                                                  |
| MDFNA2-250       | 0.8×6.35         | 8.4                | 22.6 | 13.0 | 4.2 | 2.3 | 0.4 |                    |             |                                                                                  |
| MDFNA5-250       | 0.8×6.35         | 8.4                | 24.0 | 13.0 | 8.0 | 3.4 | 0.4 | 500                | 黄Yellow     |                                                                                  |




母（尼龙）全绝缘接头  
Fully-Nylon-Insulated  
Female Connector

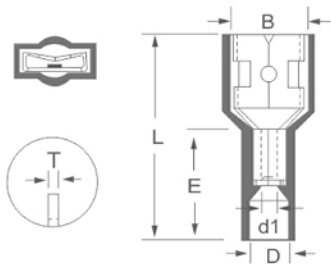

| 型号<br>ITEM NO . | 接插规格<br>Nema Tab | 尺寸<br>DIMENSION mm |      |      |     |     |     | 包装<br>PCS/<br>PACK | 颜色<br>COLOR | 说明<br>EXPLANATION                                                                                                                      |
|-----------------|------------------|--------------------|------|------|-----|-----|-----|--------------------|-------------|----------------------------------------------------------------------------------------------------------------------------------------|
|                 |                  | B                  | L    | E    | D   | d1  | T   |                    |             |                                                                                                                                        |
| FDFNY1.25-250   | 0.8×6.35         | 10.0               | 22.3 | 11.3 | 4.4 | 1.7 | 0.4 | 1000               | 紫Purple     | 材质:黄铜<br>绝缘套管: 尼龙(PA66)<br>耐温: 105℃<br>电压: 400V<br><br>Material:Brass<br>Insulation: Nylon(PA66)<br>Temperature :105℃<br>Voltage: 400V |
| FDFNY2-250      | 0.8×6.35         | 10.0               | 22.3 | 11.3 | 4.4 | 2.3 | 0.4 | 1000               | 绿Green      |                                                                                                                                        |
| FDFNY5.5-250    | 0.8×6.35         | 10.0               | 22.3 | 11.3 | 6.3 | 3.4 | 0.4 | 500                | 黄Yellow     |                                                                                                                                        |

公（尼龙）全绝缘接头  
Fully-Nylon-Insulated  
Male Connector

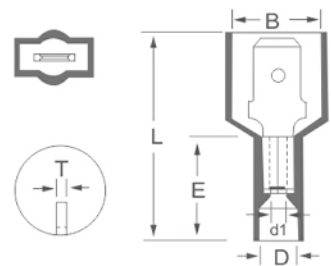


| 型号<br>ITEM NO . | 接插规格<br>Nema Tab | 尺寸<br>DIMENSION mm |      |      |     |     |     | 包装<br>PCS/<br>PACK | 颜色<br>COLOR | 说明<br>EXPLANATION                                                                                                                      |
|-----------------|------------------|--------------------|------|------|-----|-----|-----|--------------------|-------------|----------------------------------------------------------------------------------------------------------------------------------------|
|                 |                  | B                  | L    | E    | D   | d1  | T   |                    |             |                                                                                                                                        |
| MDFNY1.25-250   | 0.8×6.35         | 11.0               | 24.0 | 10.0 | 4.4 | 1.7 | 0.8 | 500                | 紫Purple     | 材质:黄铜<br>绝缘套管: 尼龙(PA66)<br>耐温: 105℃<br>电压: 400V<br><br>Material:Brass<br>Insulation: Nylon(PA66)<br>Temperature :105℃<br>Voltage: 400V |
| MDFNY2-250      | 0.8×6.35         | 11.0               | 24.0 | 10.0 | 4.4 | 2.3 | 0.8 | 500                | 绿Green      |                                                                                                                                        |
| MDFNY5.5-250    | 0.8×6.35         | 11.0               | 24.0 | 10.0 | 6.3 | 3.4 | 0.8 | 500                | 黄Yellow     |                                                                                                                                        |






母 (尼龙) 全绝缘接头  
Fully-Nylon-Insulated  
Female Connector

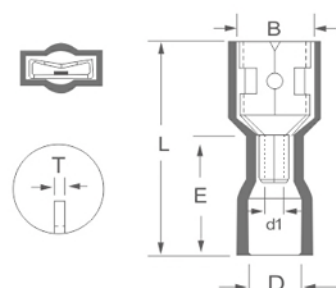

| 型号<br>ITEM NO . | 接插规格<br>Nema Tab | 尺寸<br>DIMENSION mm |      |      |     |     |     | 包装<br>PCS/<br>PACK | 颜色<br>COLOR | 说明<br>EXPLANATION                                                                                                                        |
|-----------------|------------------|--------------------|------|------|-----|-----|-----|--------------------|-------------|------------------------------------------------------------------------------------------------------------------------------------------|
|                 |                  | B                  | L    | E    | D   | d1  | T   |                    |             |                                                                                                                                          |
| FDFNYA1.25-250  | 0.8×6.35         | 8.8                | 21.3 | 10.3 | 4.2 | 1.7 | 0.4 | 1000               | 红Red        | 材质:黄铜<br>绝缘套管: 尼龙(PA66)<br>耐温: 105°C<br>电压: 400V<br><br>Material:Brass<br>Insulation: Nylon(PA66)<br>Temperature :105°C<br>Voltage: 400V |
| FDFNYA2-250     | 0.8×6.35         | 8.8                | 21.3 | 10.3 | 4.2 | 2.3 | 0.4 | 1000               | 蓝Blue       |                                                                                                                                          |
| FDFNYA5.5-250   | 0.8×6.35         | 8.8                | 22.3 | 10.3 | 6.1 | 3.4 | 0.4 | 500                | 黄Yellow     |                                                                                                                                          |

公 (尼龙) 全绝缘接头  
Fully-Nylon-Insulated  
Male Connector

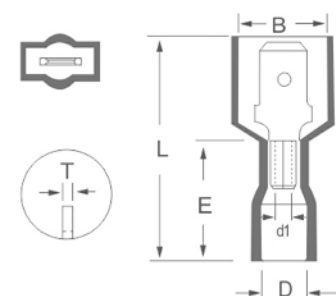

| 型号<br>ITEM NO . | 接插规格<br>Nema Tab | 尺寸<br>DIMENSION mm |      |      |     |     |     | 包装<br>PCS/<br>PACK | 颜色<br>COLOR | 说明<br>EXPLANATION                                                                                                                        |
|-----------------|------------------|--------------------|------|------|-----|-----|-----|--------------------|-------------|------------------------------------------------------------------------------------------------------------------------------------------|
|                 |                  | B                  | L    | E    | D   | d1  | T   |                    |             |                                                                                                                                          |
| MDFNYA1.25-250  | 0.8×6.35         | 10.3               | 23.0 | 10.0 | 4.2 | 1.7 | 0.8 | 500                | 红Red        | 材质:黄铜<br>绝缘套管: 尼龙(PA66)<br>耐温: 105°C<br>电压: 400V<br><br>Material:Brass<br>Insulation: Nylon(PA66)<br>Temperature :105°C<br>Voltage: 400V |
| MDFNYA2-250     | 0.8×6.35         | 10.3               | 23.0 | 10.0 | 4.2 | 2.3 | 0.8 | 500                | 蓝Blue       |                                                                                                                                          |
| MDFNYA5.5-250   | 0.8×6.35         | 11.0               | 24.0 | 10.0 | 6.1 | 3.4 | 0.8 | 500                | 黄Yellow     |                                                                                                                                          |