





圆形（双压式尼龙）绝缘端子
Nylon-Insulated
Double Crimp Ring Terminal



型号 ITEM NO .	STUD SIZE 美制螺栓号 螺栓口直径		尺寸 DIMENSION mm							包装 PCS/ PACK	颜色 COLOR	说明 EXPLANATION
	American	Metric d2	B	F	L	E	D	d1	T			
RNYD1.25-3	#4	3.2	5.7	5.0	18.7	10.7	5.8	4.8	0.7	1000	● 红 Red	导线截面:0.5~1.5mm ² (美国线规22~16) 最大电流: I _{max} =19A 材质:紫铜 绝缘套管: 尼龙(PA66) 绝缘套管加铜套 耐温: 105℃ 电压: 400V Lead Section: 0.5~1.5mm ² (A.W. G.22-16) Max Current:I _{max} =19A Material:Copper Insulation: Nylon(PA66) Copper Tube with Sleeve Temperature :105℃ Voltage: 400V
RNYD1.25-3.5S	#6	3.7										
RNYD1.25-3.5M	#6	3.7	6.6	6.3	20.4							
RNYD1.25-3.5L	#6	3.7	8.0	7.0	21.7							
RNYD1.25-4S	#8	4.3	6.6	6.3	20.4							
RNYD1.25-4L	#8	4.3	8.0	7.0	21.7							
RNYD1.25-5S	#10	5.3										
RNYD1.25-5L	#10	5.3	9.5	7.5	23.0							
RNYD1.25-5LL	#10	5.3	11.6	11.3	27.7							
RNYD1.25-6S	1/4	6.5	9.5	7.5	23.0							
RNYD1.25-6L	1/4	6.5	11.6	11.3	27.7							
RNYD1.25-8	5/16	8.5										
RNYD1.25-8L	5/16	8.5	13.7	13.9	31.6							
RNYD1.25-10	3/8	10.5										
RNYD1.25-10L	3/8	10.5	18.0	15.0	34.7							
RNYD1.25-12	1/2	13.0										
RNYD1.25-14	9/16	15.0	27.0	21.0	45.2							
RNYD1.25-16	5/8	17.0										
RNYD1.25-18	11/16	19.0										
RNYD1.25-20	3/4	21.0										

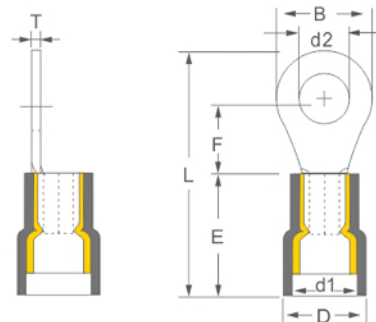


圆形（双压式尼龙）绝缘端子
Nylon-Insulated
Double Crimp Ring Terminal

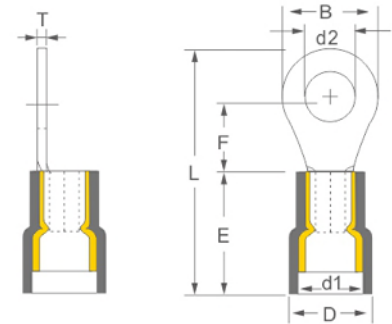

型号 ITEM NO .	STUD SIZE 美制螺栓号 螺栓口直径		尺寸 DIMENSION mm							包装 PCS/ PACK	颜色 COLOR	说明 EXPLANATION
	American	Metric d2	B	F	L	E	D	d1	T			
RNYD2-3	#4	3.2	6.6	4.3	18.4	11.0	6.8	5.5	0.8	1000	蓝 Blue 导线截面:1.5~2.5mm² (美国线规16~14) 最大电流: I_{max}=27A 材质:紫铜 绝缘套管: 尼龙(PA66) 绝缘套管加铜套 耐温: 105℃ 电压: 400V Lead Section: 1.5~2.5mm² (A.W. G.16-14) Max Current:I_{max}=27A Material:Copper Insulation: Nylon(PA66) Copper Tube with Sleeve Temperature :105℃ Voltage: 400V	
RNYD2-3.5S	#6	3.7		6.3	20.4							
RNYD2-3.5M	#6	3.7		7.4	22.4							
RNYD2-3.5L	#6	3.7	8.5	6.3	20.4							
RNYD2-4S	#8	4.3	6.6	6.3	20.4							
RNYD2-4L	#8	4.3	8.5	7.4	22.4							
RNYD2-5S	#10	5.3										
RNYD2-5L	#10	5.3	9.5		23.0							
RNYD2-6S	1/4	6.5										
RNYD2-6L	1/4	6.5	12.0	11.0	27.4							
RNYD2-8	5/16	8.5										
RNYD2-8L	5/16	8.5	13.6	13.9	31.4							
RNYD2-10	3/8	10.5										
RNYD2-10L	3/8	10.5	18.2	15.0	35.2							
RNYD2-12	1/2	13.0										
RNYD2-14	9/16	15.0	27.0	21.0	45.2					500		
RNYD2-16	5/8	17.0										
RNYD2-18	11/16	19.0										
RNYD2-20	3/4	21.0										

圆形（双压式尼龙）绝缘端子
Nylon-Insulated
Double Crimp Ring Terminal

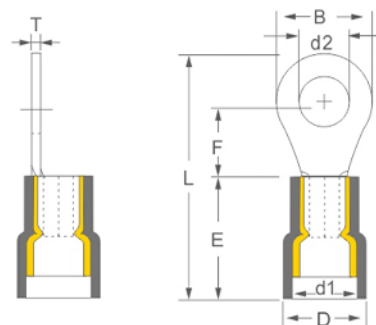

型号 ITEM NO .	STUD SIZE 美制螺栓号 螺栓口直径		尺寸 DIMENSION mm							包装 PCS/ PACK	颜色 COLOR	说明 EXPLANATION
	American	Metric d2	B	F	L	E	D	d1	T			
RNYD5.5-3	#4	3.2	7.2	6.0	23.7	14.2	8.6	7.2	1.0	500	黄 Yellow	导线截面:4~6mm ² (美国线规12~10) 最大电流: I _{max} =48A 材质:紫铜 绝缘套管: 尼龙(PA66) 绝缘套管加铜套 耐温: 105℃ 电压: 400V Lead Section: 4~6mm ² (A.W. G.12-10) Max Current:I _{max} =48A Material:Copper Insulation: Nylon(PA66) Copper Tube with Sleeve Temperature :105℃ Voltage: 400V
RNYD5.5-3.5	#6	3.7										
RNYD5.5-4S	#8	4.3										
RNYD5.5-4L	#8	4.3	9.5	8.2	27.0							
RNYD5.5-5	#10	5.3										
RNYD5.5-6	1/4	6.5	12.0	10.5	30.3					200		
RNYD5.5-6M	1/4	6.5		13.0	33.0							
RNYD5.5-8	5/16	8.5	15.0	13.5	34.8							
RNYD5.5-10	3/8	10.5										
RNYD5.5-12	1/2	13.0										
RNYD5.5-14	9/16	15.0	32.0	25.2	55.2							
RNYD5.5-16	5/8	17.0										
RNYD5.5-18	11/16	19.0										
RNYD5.5-20	3/4	21.0										