

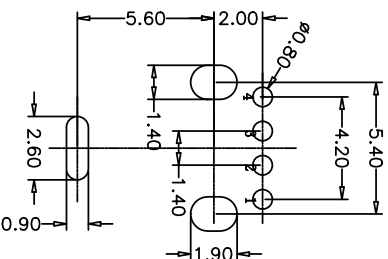
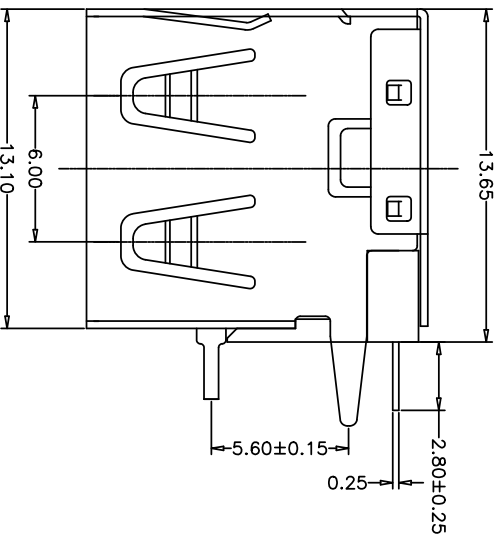
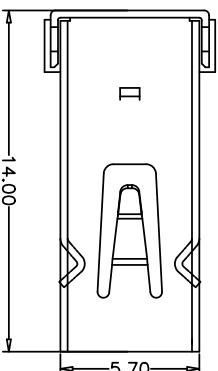


RoHS

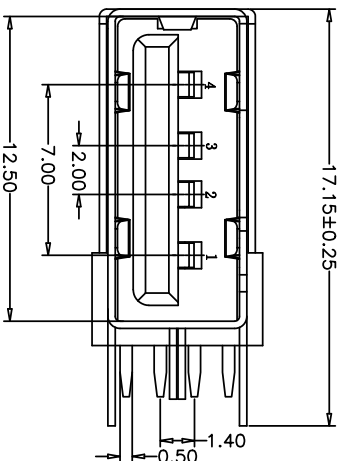

RECOMMENDED PCB LAYOUT

GENERAL TOLERANCES: ±0.05

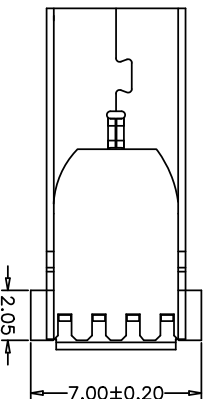

产品图

PRODUCT CHART DWG

PIN NUMBER	SIGNAL NAME
1	V BUS
2	D-
3	D+
4	GND

公差一览表

TOLERANCE UNLESS OTHERWISE

公差一览表

UNIT

MM

制图

L S S

产品料号

906-162A101D10200

产品名称

AF14.0封装壳体三基牌无边壳B1白胶

角法

版本

A0

深圳市精拓金电子有限公司

电气特性:Electrical:

1. 额定电流: Current Rating

1.5A/contact terminal

2. 额定电压: Voltage Rating

30V DC

3. 接触阻抗: Contact Resistance

30 milliohms MAX

4. 耐电压: Dielectric Withstanding Voltage:

500 V AC AT Sea level

5. 绝缘阻抗: Insulation Resistance:

1000MEGA ohms MIN

物理性能: Mechanical:

1. 插拔力: Connector Mate and Unmate Force

Mate force: 3.57kgf (MAX)

Unmate force: 0.7kgf (MIN)

2. 端子保持力: Terminal Retention

1.0kgf (MIN)

3. 寿命: 1500次

原材料: Material:

1. 塑胶: Housing: pbt/LCP

2. 端子: Contact: Copper Alloy C2680

3. 外壳: Shell: SPCC/C2680

电镀: Finish:

1. 端子Contact: Au G/F u" Plated on contact area

Tin50u" Plated on solder area

Nickel 50u" Plated underplating over all.

2. 外壳Shell: Nickel 50u" Min plating over all.

您正在使用 ZWCAD 2022 个人版, 不得用于商业用途, 详情请咨询: 4005718259。