
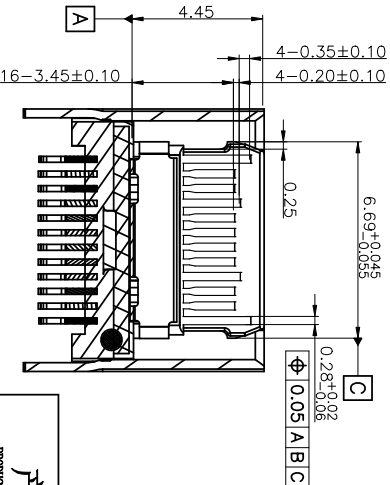

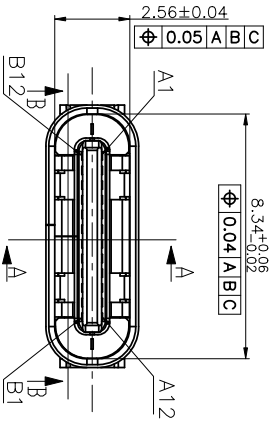
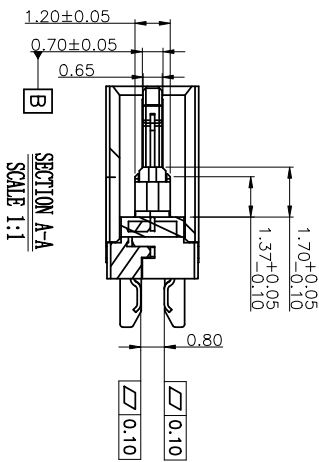


MAPX	MODIFICATION	DRW	DATE

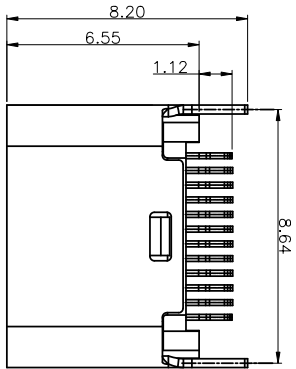

NOTES:
1.MATERIAL:
MOLDING: LCP UL94 V-0
CONTACT: COPPER ALLOY.
GOLD PLATING ALL OVER 50u" Min NICKEL
AND 100u" Min Tin ALL OVER 50u" Min NICKEL
ON SOLDER AREA
SHELL: SUS304-H,T=0.30±0.03mm
50u" NICKEL PLATING OVER ALL.
SHILD: SUS304-H,T=0.12±0.03mm
2.MECHANICAL:
INSERTION: 5~20N.
EXTRACTION: 8~20N AFTER TEST .
DURABILITY: 10000 CYCLES
3.ELECTRICAL:
CURRENT: 5A FOR VBUS;
1.25A FOR GND PIN.
0.25A FOR OTHER.
VOLTAGE: 20 V MAX
WITHSTANDING VOLTAGE: 100V AC R.M.S
CONTACT RESISTANCE: 40mΩ MAX.
INSULATION RESISTANCE: 100MΩ MIN.
4.ENVIRONMENTAL
TEMPERATURE RANGE -55°C ~ +85°C


TABLE 1:

④	Shell	1	SUS 304	NI PLATING	T=0.30mm
③	MID PLATE	1	SUS 304		T=0.15mm
②	Terminal	16	C7025/C2680	Au1u" PLATING	T=0.15mm
①	Housing	3	LCP 1301		
NO.	PART NAME	QTY	MATERIAL	DESCRIPTION	REMARK

产品图				深圳市精拓金电子有限公司			
公差一览表				Shenzhen Jing Tuo Jin Electronics Co., Ltd.			
公差一览表	公差一览表	公差一览表	公差一览表	单位	制图	制图料号	918-418K2022B40007
TOLERANCE UNLESS OTHERWISE	TOLERANCE UNLESS OTHERWISE	TOLERANCE UNLESS OTHERWISE	TOLERANCE UNLESS OTHERWISE	UNITS	DRAWING	PRODUCT PART NO.	
X.	±0.25	X.	±5.°	MM	审核	郭治富	产品名称
.X	±0.20	.X	±2.°	SCALE	日期	2019-11-07	TYPE-C3.1母头直立式6.55/8.2夹板0.8不锈钢107黑胶24PIN
.XX	±0.15	.XX	±1.°	DATE	核准	黄国荣	角法
.XXX	±0.10	.XXX	±0.5°	APPRO	版本	A0	

The image contains two technical line drawings of a cable assembly. The drawing on the left shows a cable with a multi-pin connector, possibly a D-sub connector, with a small rectangular component attached to its side. The drawing on the right shows a separate component, which appears to be a housing or a bracket, with a series of pins or contacts on its top surface and a small rectangular component attached to its side.

PIN	Signal Name	PIN	Signal Name
A1	GND	B12	GND
A2	SSTXp1	B11	SSRXp1
A3	SSTXn1	B10	SSRXn1
A4	VBUS	B9	VBUS
A5	CC1	B8	SBUS
A6	Dp1	B7	Dn2
A7	Dn1	B6	Dp2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10	SSRXn2	B3	SSTXn2
A11	SSRXp2	B2	SSTXp2
A12	GND	B1	GND

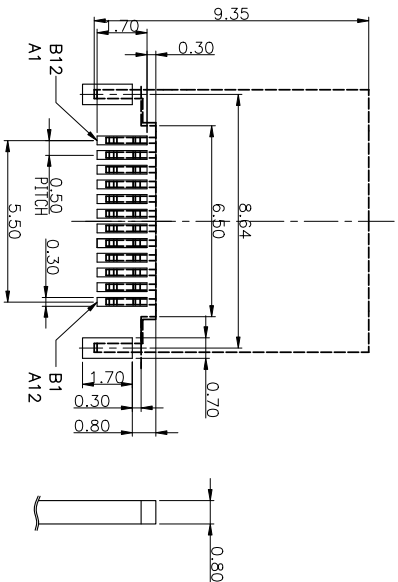

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED $\pm 0.05\text{mm}$