



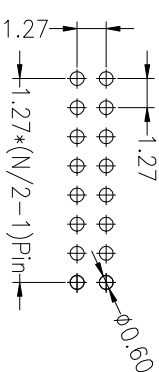

SPECIFICATIONS

Rated Current:1.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:−40°c to +105°c

Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V−0)
Resistance To Soldering Heat:
260° C±5° C, 10s(PA6T&PA9T&LCP insulator)


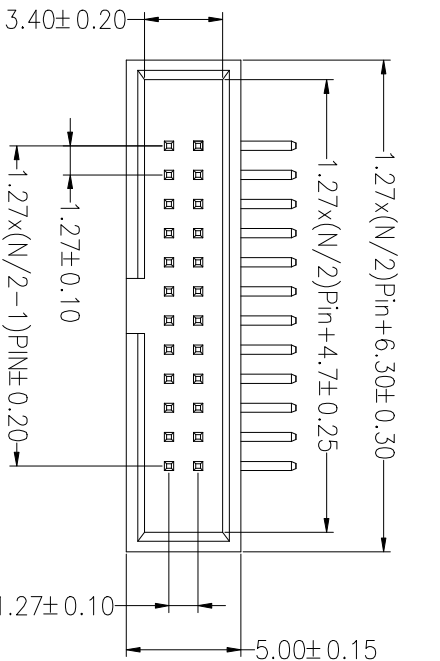


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

Ordering Information

3230 XX R XX X B K00 X XX

No.of Pins 10−100P
Contact Plating G0:Gold Flash
G1:1u" Gold
G2:1.5u" Gold
G3:2u" Gold
G4:3u" Gold
G5:5u" Gold
G6:10u" Gold
G7:15u" Gold
G8:30u" Gold
S0:Gold Flash/Tin
Insulator Material Option
C=BK−PA6T
E=BK−PA9T
F=BK−LCP
Packing 0=PE Bog
A=Troy
T=Tube
P=Tube+Cap
R=Reel+Cap
Stream code 01~99

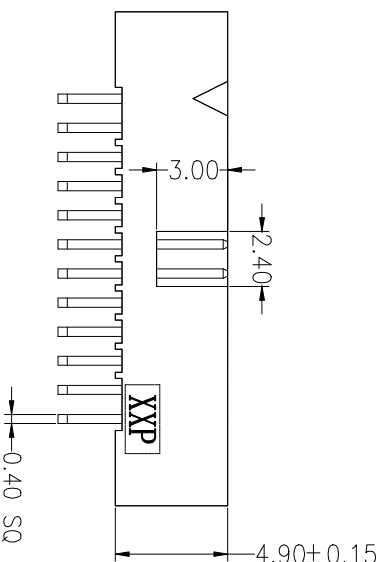

S0:Gold Flash/Tin
SN:Tin

1	2	3	4	5	6	7	8	9
A								
	B	2014.10.18	change terminal l=6.8mm→l=7.0mm					
	A0	2012.03.28	NEW DRAWING					
1	REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL	APPROVE	
	1							
B								
C								
D								
E								
F								
G								

jiln 深圳锦凌电子股份有限公司
SHENZHEN JINLING ELECTRONICS CO.,LTD
Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992

PART NO. 3230XXXXXBK00XXX

TITLE: 1.27Box Header Npin H4.9 90°