HSF RoHS

FILE NO :E362810

SPECIFICATIONS
Rated Current:3.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:1000V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:−40°c to +105°c

Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V−0)
Resistance To Soldering Heat:
245° C±5° C, 10s(PBT insulator)
260° C±5° C, 10s(PA6T&PA9T&LCP insulator)

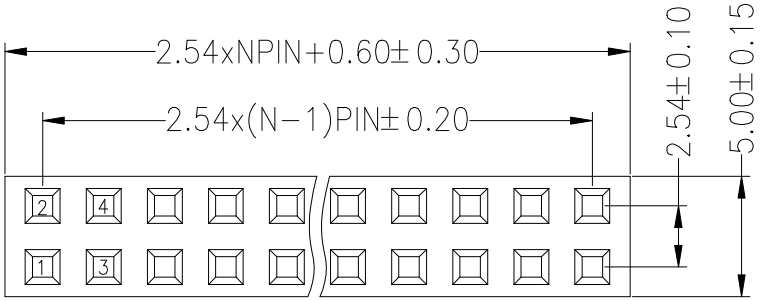

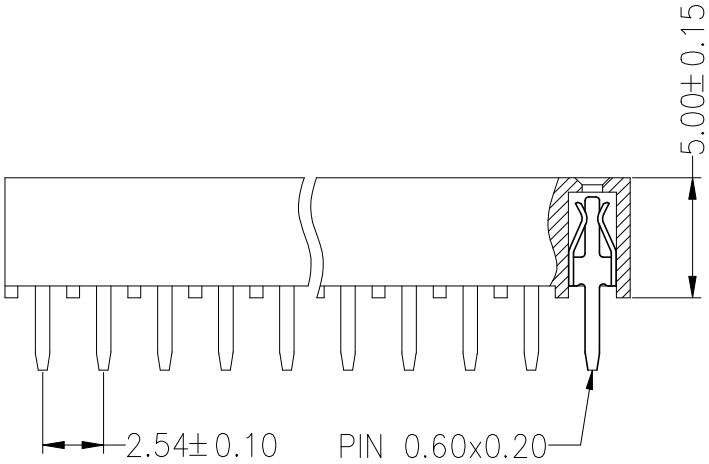



Ordering Information

2250 02 XX X N XX S U X XX

- No.of Pins Per Row: 02−40
- Insulator Material Option: A=BK−PBT, C=BK−PA6T, E=BK−PA9T, F=BK−LCP
- Contact Plating: G1:Gold Flash, G2:1.5u" Gold, G3:2u" Gold, G4:3u" Gold, G5:5u" Gold, G6:10u" Gold, G7:15u" Gold, G8:30u" Gold, S0:Gold Flash/Tin, SN:Tin
- Packing: A=Tray, T=Tube, P=Tube+Cap, R=Reel+Cap, M=Reel+Mylar
- code stream: 01~99

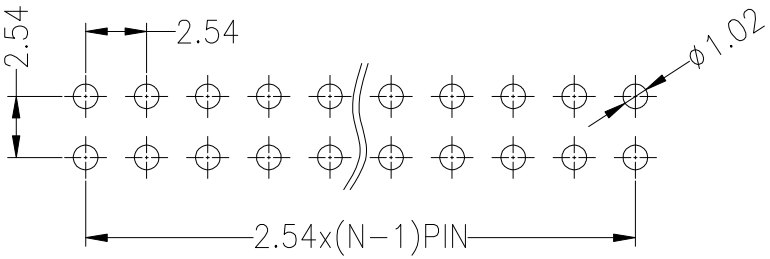

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2023.03.14	NEW DRAWING	

OPERATION				
X.X	±0.30	DRAW	RICH LIN	23.03.14
X.XX	±0.20	CHECK		
X.XXX	±0.10			
Angle	±3°	APPROVE		
DIM	TOL			

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

JILN® 深圳市锦凌电子有限公司
SHENZHEN JINLING ELECTRONICS CO.,LTD
Tel: 86-755-27483253 Fax: 86-755-2997-5588

PART NO.	225002XXXNXXSUXXX
TITLE:	2.54PF H5.0mm 2xNpin 180°