


HSF








SPECIFICATIONS

Rated Current: 3AMP
 Contact Resistance: 50mΩ Max
 Withstand Voltage: 1000VAC for 1 minute
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -20°C to +85°C
 Mating force: 1.96N Max
 Un-mating force: 0.49N Min

Contact Material: Copper Alloy
 Contact Plating: Au Over Ni
 Housing Materials: PBT UL94V-0

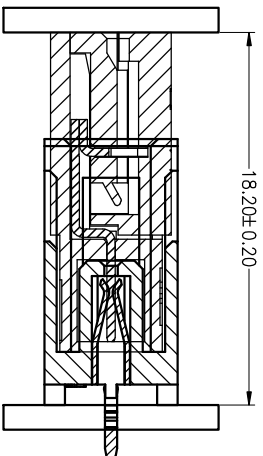

Mating Draw (Ref)

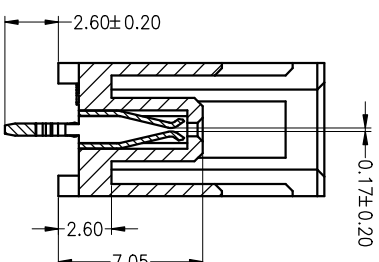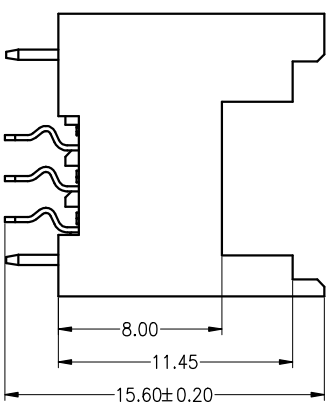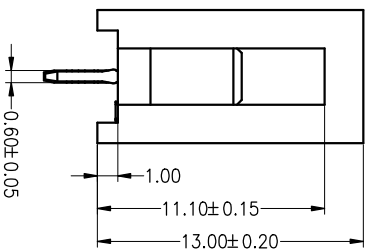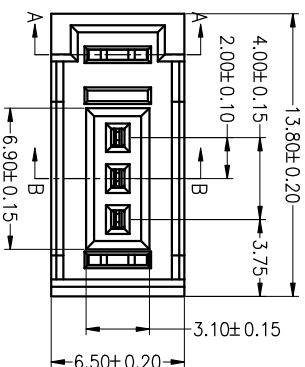

P.C.B. Layout

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	
				DIM	TOL
A0	2023.03.02	NEW DRAWING		X:XX Angle	±0.10 ±3°
1				X:XX	±0.30

OPERATION	DRAW	SCALE	FIT
CHECK	zhouqiyong 2023.03.02	UNIT	mm
APPROVE		SIZE	A4
		SHEET	1/1
		PROJ.	

JILIN® 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONIC CO.,LTD
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992
 PART NO. 8310-F13G1AB01
 TITLE: E-CON 3P TYPE-A Female Connectors