

Product Summary

$V_{(BR)DSS}$	$R_{DS(on)TYP}$	I_D
-100V	36mΩ@-10V	-25A
	51mΩ@-4.5V	



合肥矽普半导体

Siliup Semiconductor Technology Co., Ltd

技术 品质 服务

www.siliup.com


Feature

- Fast Switching
- Low On-Resistance
- Excellent FOM

Applications


- Motor control
- Switching Regulators
- Isolated DC/DC convertor
- Alertor

Package




TO-252(1:G 2:D 3:S)

Circuit diagram



Marking



010P36G =Device Code
** =Week Code

Order Information

Device	Package	Unite/Tape
SP010P36GTH	TO-252	2500

Absolute maximum ratings (Ta=25°C unless otherwise noted)







Parameter	Symbol	Rating	Units
Drain-Source Voltage	V _{DS}	-100	V
Gate-Source Voltage	V _{GS}	±20	V
Drain Current – Continuous	I _D	-25	A
Drain Current – Pulsed	I _{DM}	-100	A
Power Dissipation (TC=25°C)	P _D	120	W
Thermal Resistance Junction to Case	R _{θJC}	1.04	°C/W
Storage Temperature Range	T _{STG}	-50 to 150	°C
Operating Junction Temperature Range	T _J	-50 to 150	°C






Electrical characteristics (Ta=25°C, unless otherwise noted)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Static Characteristics						
Drain-Source Breakdown Voltage	B _V DSS	VGS=0V , ID=-250uA	-100	---	---	V
Drain-Source Leakage Current	I _D SS	VDS=-100V , VGS=0V	---	---	-1	uA
Gate-Source Leakage Current	I _G SS	VGS= ± 20V , VDS=0V	---	---	± 100	nA
Gate Threshold Voltage	VGS(th)	VGS=VDS , ID =-250uA	-1	-2.2	-3	V
Static Drain-Source On-Resistance	R _{DS(ON)}	VGS=-10V , ID=-15A	---	36	45	mΩ
		VGS=-4.5V , ID=-10A	---	51	68	mΩ
Dynamic Characteristics						
Total Gate Charge	Q _g	VGS=-10V,VDS=-50V,ID=-15A	---	20	---	nC
Gate-Source Charge	Q _{gs}		---	6.1	---	
Gate-Drain Charge	Q _{gd}		---	3.5	---	
Turn-On Delay Time	T _{d(on)}	VGS=-10V,VDD=-50V, ID=-15A, RGEN=6Ω	---	11	---	ns
Rise Time	T _r		---	56	---	
Turn-Off Delay Time	T _{d(off)}		---	46	---	
Fall Time	T _f		---	84	---	
Input Capacitance	C _{iss}	VDS=-50V,VGS=0V,f=1MHZ	---	1415	---	pF
Output Capacitance	C _{oss}		---	217	---	
Reverse Transfer Capacitance	C _{rss}		---	3	---	
Drain-Source Body Diode Characteristics						
Continuous Source Current	I _s	VG=VD=0V , Force Current	---	---	-30	A
Diode Forward Voltage	V _{SD}	VGS=0V , IS=-1A	---	---	-1.2	V




Typical Characteristics

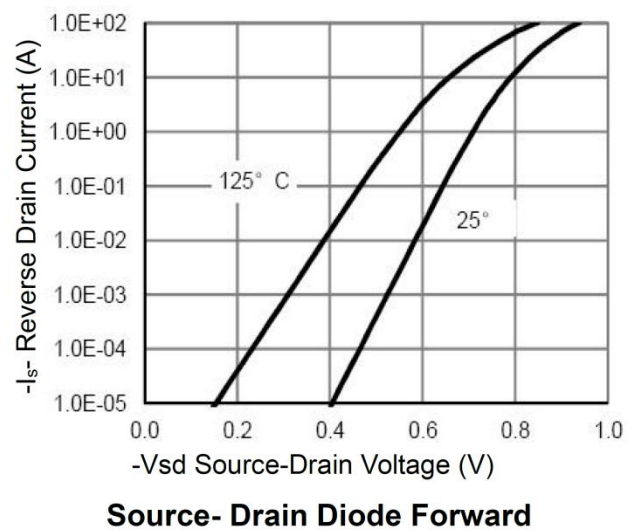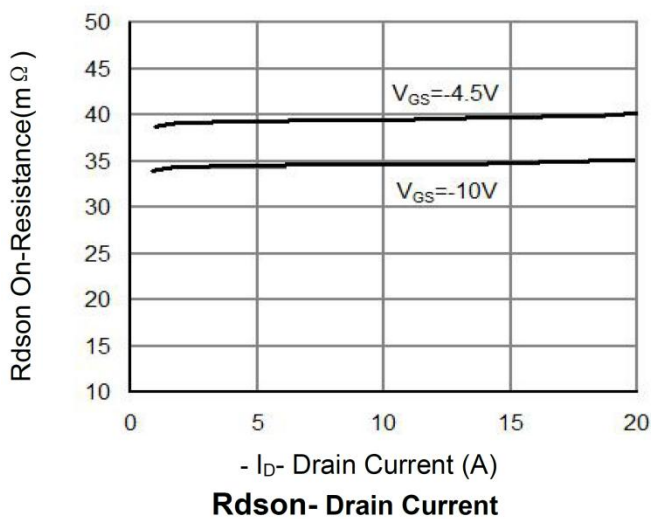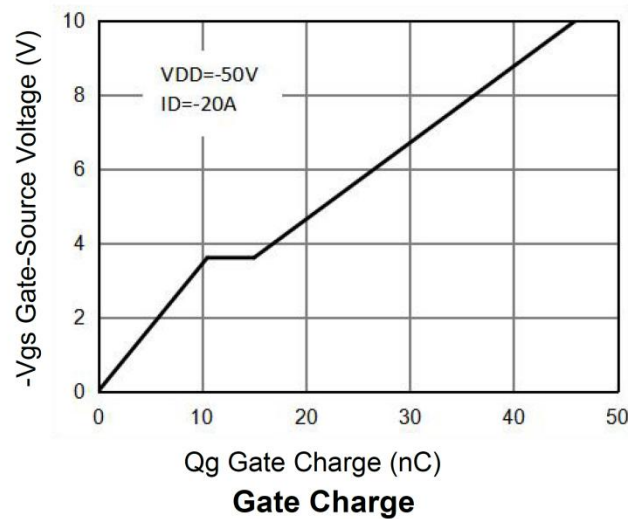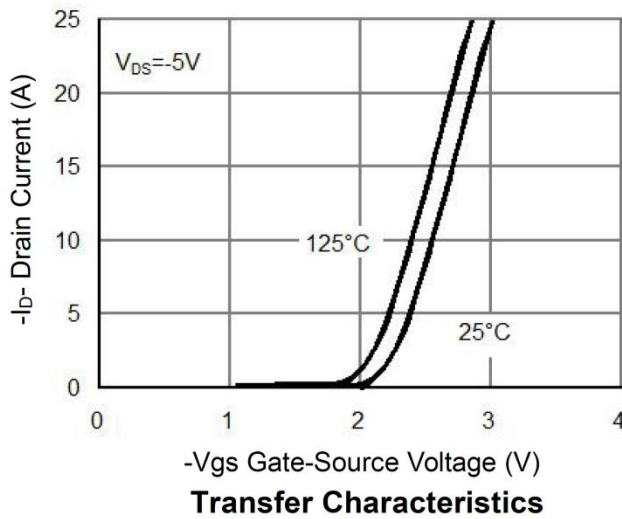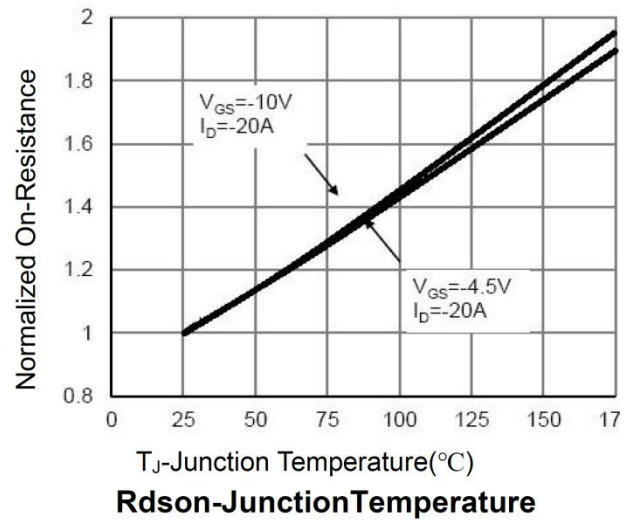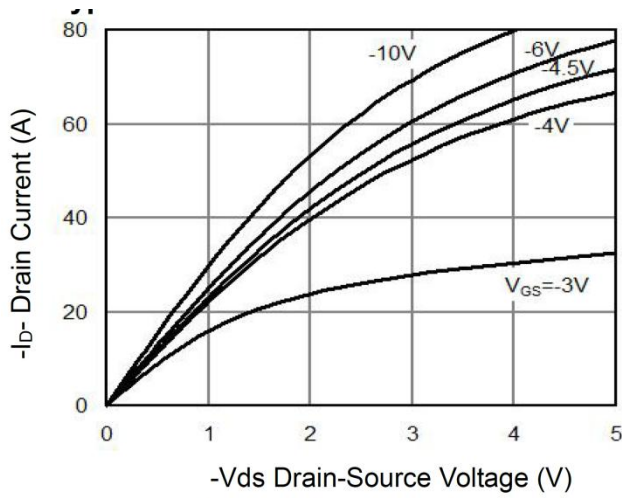

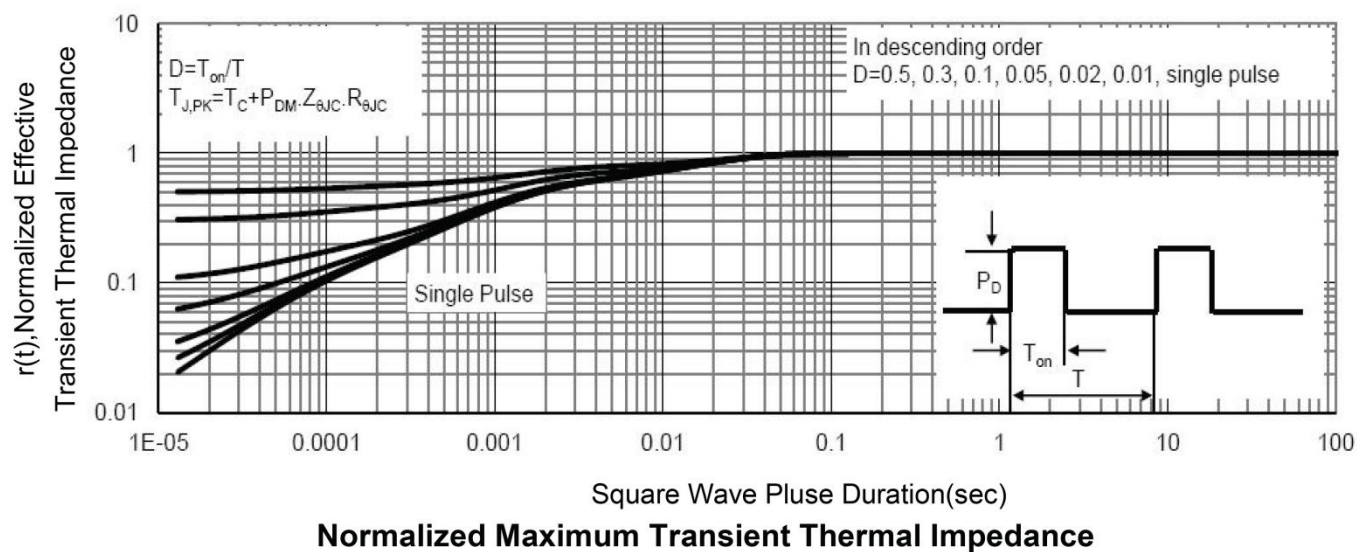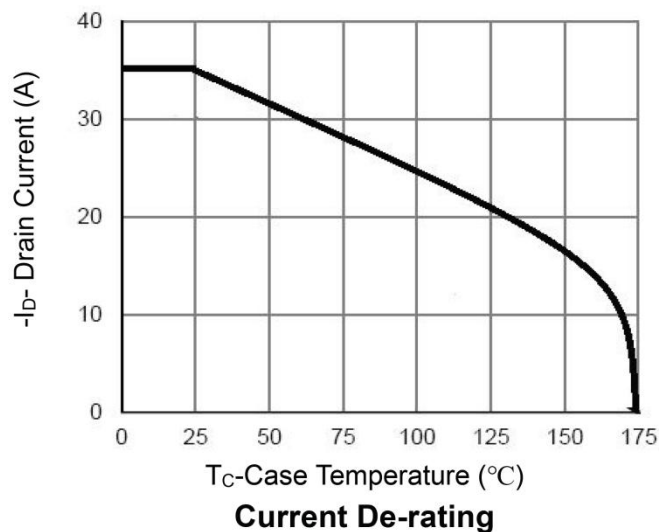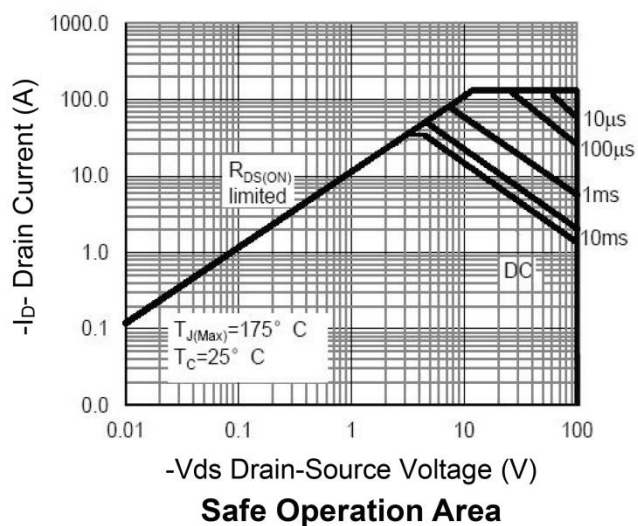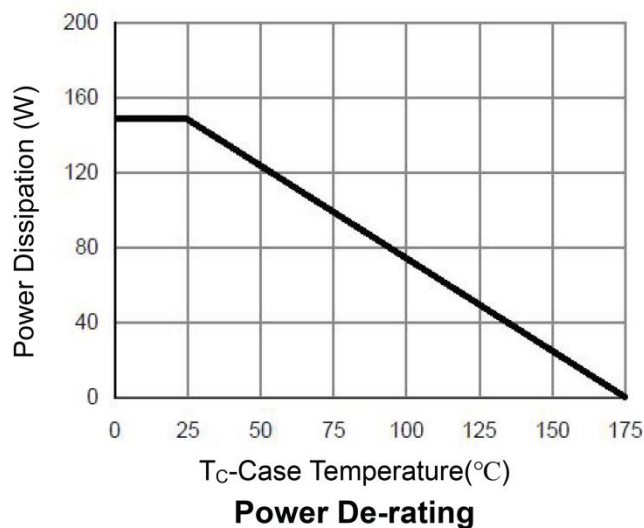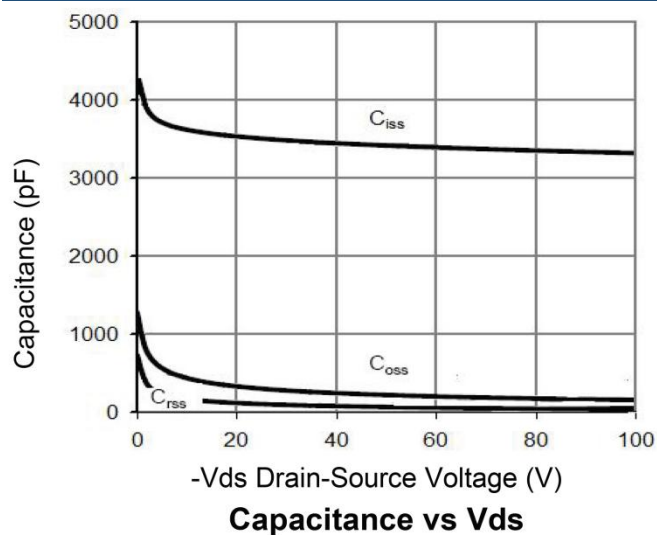



TO-252 Package Information

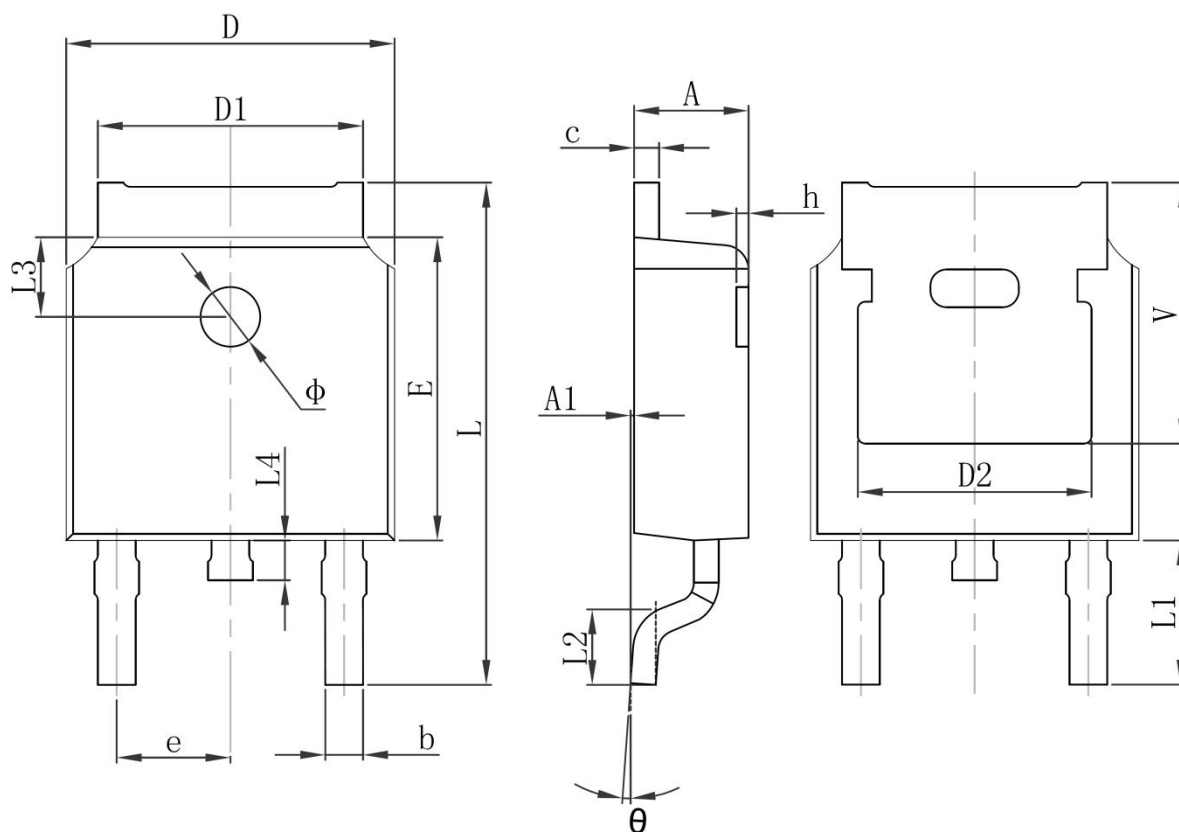

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	2.200	2.400	0.087	0.094
A1	0.000	0.127	0.000	0.005
b	0.660	0.860	0.026	0.034
c	0.460	0.580	0.018	0.023
D	6.500	6.700	0.256	0.264
D1	5.100	5.460	0.201	0.215
D2	4.830 REF.		0.190 REF.	
E	6.000	6.200	0.236	0.244
e	2.186	2.386	0.086	0.094
L	9.800	10.400	0.386	0.409
L1	2.900 REF.		0.114 REF.	
L2	1.400	1.700	0.055	0.067
L3	1.600 REF.		0.063 REF.	
L4	0.600	1.000	0.024	0.039
Φ	1.100	1.300	0.043	0.051
θ	0°	8°	0°	8°
h	0.000	0.300	0.000	0.012
V	5.350 REF.		0.211 REF.	