

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE $\pm$ 0.05)

Rated Current:1.0AMP

Contact Resistance: 20m Ω Max

Withstand Voltage: 500V AC/DC

Insulation Resistance: 1000M Ω Min

Operation Temperature: -40°C to $+105^{\circ}\text{C}$



Contact Material:Brass

Contact Plating: Au or Sn Over Ni

Insulator Material: Polyester (UL94V-0)



Resistance To Soldering Heat:

260 °C $\pm$ 5 °C, 10s (PA6T&PA9T&LCP insulator)

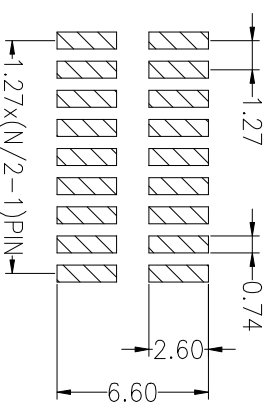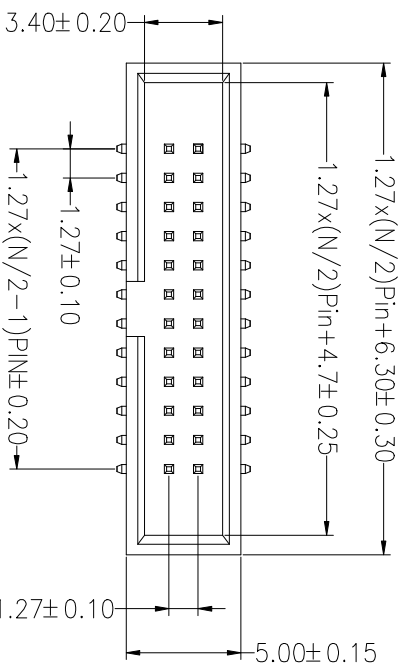

Ordering Information

3230 XX M XX X B K00 X XX

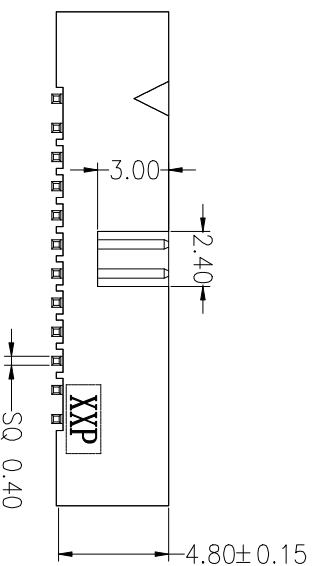

No. of Pins	Contact Plating	Insulator Material	Packing	Stream code
10-100P	G50:Gold Flash	Option	O=PE Bog	01~99
	G1:1u" Gold	C-B-PAGT	A=Tray	
	G2:1.5u" Gold	E=BK-PA9T	T=Tube	
	G3:2u" Gold	F=BK-LCP	P=Tube+Cap	
	G4:3u" Gold		R=Reel+Cap	

G6:10u" Gold
G7:15u" Gold
G8:30u" Gold
S0:Gold Flash/Tin
SN:Tin

[illegible]