





REV.	ECN NO.	DESCRIPTION	DATE	DESIGN

NOTES:





- 1.BASE: LCP
- 2.PIN: Brass
- 3.Solder Tab: Brass

SPECIFICATIONS:

- 1.Spacing: 1.25
- 2.Voltage Rating: 125V AC DC
- 3.Current Rating: 1A AC DC
- 4.Insulation Resistance: 100MΩ Min
- 5.Contact Resistance: 20mΩ Max
- 6.Withstanding voltage: 500V AC 1/Minute
- 7.Temperatuer Range: -25℃ ~+ 85℃

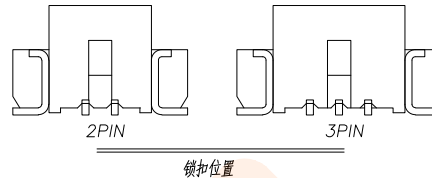

- 1.塑件表面应光洁、无毛边、无明显收缩、缺陷、裂纹等现象。
- 2.锁扣窗口: 2~3PIN为1个, ≥4PIN为2个。
- 3.不同PIN位吸盖加入/取出力有差异, 实属正常现象。

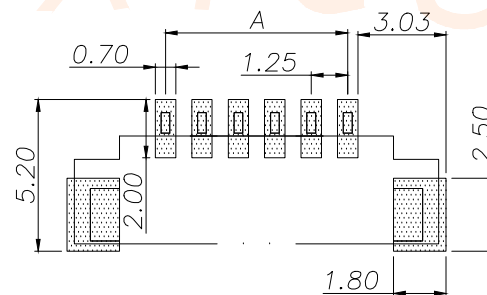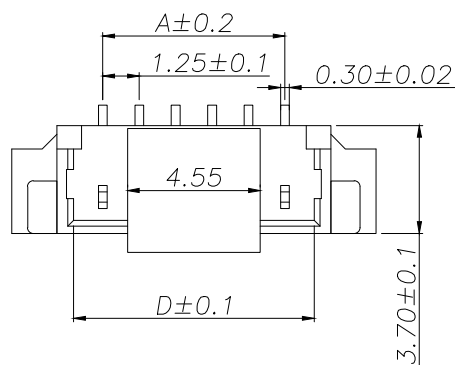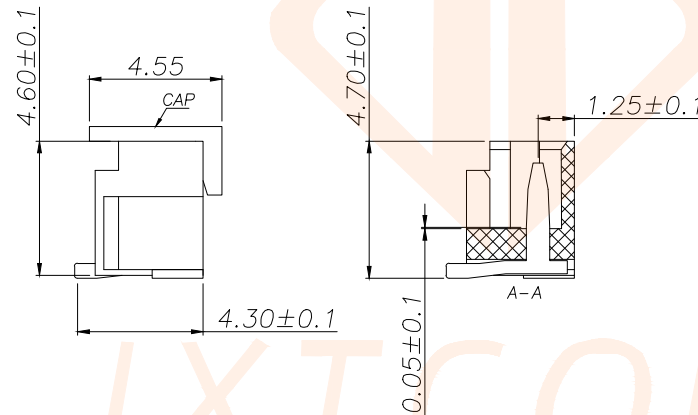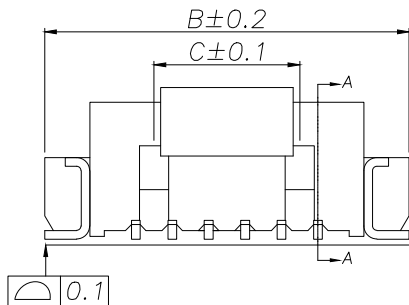

P.C.B LAYOUT

Part No	PIN	A	B	C	D
D125F2L1-2W2P43	2	1.25	7.50		3.25
D125F2L1-2W3P43	3	2.50	8.75		4.50
D125F2L1-2W4P43	4	3.75	10.00	2.50	5.75
D125F2L1-2W5P43	5	5.00	11.25	3.75	7.00
D125F2L1-2W6P43	6	6.25	12.50	5.00	8.25
D125F2L1-2W7P43	7	7.50	13.75	6.25	9.50
D125F2L1-2W8P43	8	8.75	15.00	7.50	10.75
D125F2L1-2W9P43	9	10.00	16.25	8.75	12.00
D125F2L1-2W10P43	10	11.25	17.50	10.00	13.25
D125F2L1-2W11P43	11	12.50	18.75	11.25	14.50
D125F2L1-2W12P43	12	13.75	20.00	12.50	15.75
D125F2L1-2W12P43	13	15.00	21.25	13.75	17.00
D125F2L1-2W14P43	14	16.25	22.50	15.00	18.25
D125F2L1-2W15P43	15	17.50	23.75	16.25	19.50
D125F2L1-2W16P43	16	18.75	25.00	17.50	20.75

TOLERANCE		深圳聚兴泰电子科技有限公司 Shenzhen Juxingtai Electronic Technology Co., Ltd			
X.X ±0.30	X.* ±5°	PART NO. D125F2L1-2WXP43	TITLE: WAFER 1.25 立贴		
.XX ±0.20	X.X* ±3°				
.XXX ±0.10	X.XX* ±1°				
UNITS	mm	DESIGN: Ethan	MANUFACTURE DWG		
MATERILA	— — —	CHED: Olvia		SCALE	SHEET
FINISH	— — —	APPD: Ava		N:A	1/1