
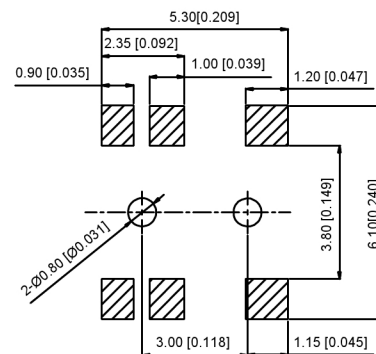
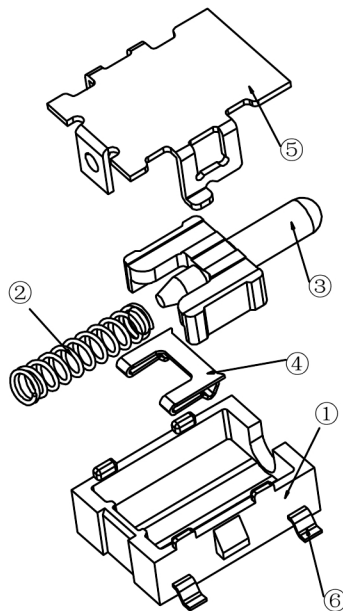


The circuit principle diagram
电路原理图

- 1.Rated voltage: 16V (DC)
额定电压: 16V (DC)
- 2.Rated current: 0.5A
额定电流: 0.5A
- 3.Insulation resistance: $\geq 50\text{M}\Omega$
绝缘电阻: $\geq 50\text{M}\Omega$
- 4.Contact resistance: $\leq 200\text{m}\Omega$
接触电阻: $\leq 200\text{m}\Omega$
- 5.Withstand voltage: AC 250V (50Hz)/min
耐压: AC 250V (50Hz)/min
- 6.Operating temperature: $-40^\circ\text{C}\sim+125^\circ\text{C}$
工作温度: $-40^\circ\text{C}\sim+125^\circ\text{C}$
7. Action force: $100 \pm 30\text{gf}$
操作力: $100 \pm 30\text{gf}$
- 8.Service life: 50, 000 times
寿命: 50, 000 time

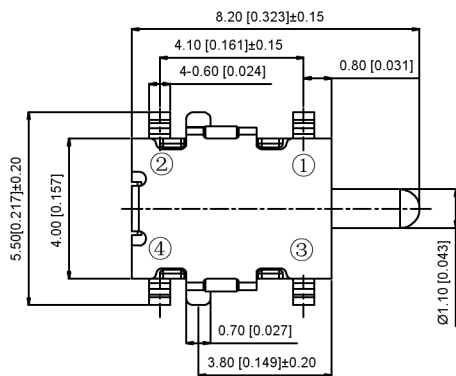

PCB Installation Dimension Drawing
PCB 安装尺寸图

TM-1022 - X - U

① ② ③ ④

- 1.XKB Series No.
- 2.XKB Serial Number
- 3.Type:A=Type A;B=Type B
- 4.U=TM-1022-X ugraded version
(TM-1022-X升级款)

6	Terminal	Phosphor copper	4	Ag plating
5	Housing	Phosphor copper	1	Ag plating
4	Reed	Silver copper	1	-
3	Handle	PA46	1	Black
2	Spring	SUS	1	-
1	Base	PA46	1	Black
N0.	Part name	Material	QTY	Remark

MARK	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES
ΔX					ANGULAR ±5°
ΔX					L ≤ 4 ±0.2
ΔX					4 < L ≤ 16 ±0.3
					16 < L ≤ 63 ±0.4
					L > 63 ±0.5

XKB

XKB INDUSTRIAL PRECISION CO.,LIMITED

DSND	SCALE: N/A	MODEL TYPE: TM-1022-X-U
DWN	VIEW:	PART NO.:
CHKD	UNIT: mm/in	DWG NO.:
APPD	SIZE: A4	X-TM-1022-X-U
	WEIGHT	SHEET
		1/1
	REVISION	A0