


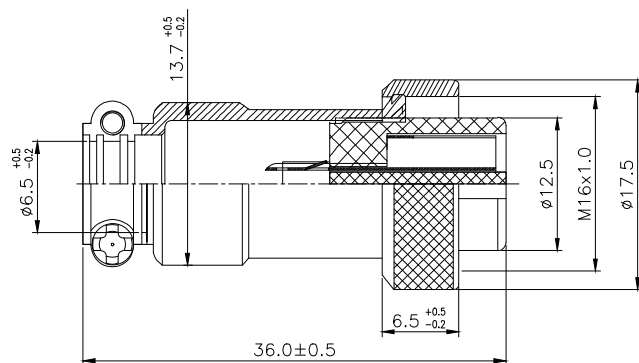

Specifications

Coupling : Threaded coupling

Shell material : Zinc alloy with Nickel Plate


Insert material : bakelite

Contact material : copper Silver Plate/Nickel

Termination : Solder

Mating cycle : 500

Cable diameter : -20°C +85°C

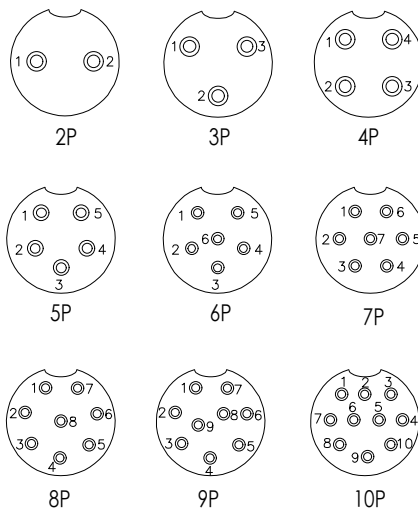

Ordering Information

XD - GX16 - NP - *

No. of Pin
2~10 Pin
Contact
Type
F=Female
M=Male

NO. of contacts	芯数	2	3	4	5	6	7	8	9	10
Rated current (A)	额定电流	7A	7A	7A	7A	5A	5A	5A	5A	5A
Operation limit voltage (AC.V.rms)	工作电压 (AC.V) 分钟	220V	220V	125V	125V	125V	125V	125V	125V	125V
Withstanding voltage (AC.V.rms) 1 minute	耐电压	1500	1500	1500	1000	1000	1000	1000	1000	1000
Insulation resistance (MΩ)	绝缘阻抗	1500	1500	1500	1000	1000	1000	1000	1000	1000
Contact resistance (mΩ)	接触阻抗	3	3	3	4	5	5	4	5	5
Solder cup mouth aperture	焊杯口孔径φ (mm)	φ1.4	φ1.4	φ1.4	φ1.2	φ0.8	φ0.8	φ0.8	φ0.8	φ0.8
Solder inter diameter	接触体孔径φ (mm)	φ2.5	φ2.5	φ2.5	φ2.0	φ1.2	φ1.2	φ1.2	φ1.2	φ1.2

			GENERAL TOLERANCE	制 图 DRAWING	 深圳讯答科技有限公司 ShenzhenXundaTechnology Co.,Ltd				
			DIM TOL	审 核 CHECK					
			X.X ±0.30	批 准 APPROVAL	产 品 名 称 TITLE	GX16 航空插头 母头	版 本 REV.	A	
1	初版发行		X.XX ±0.20	比 例 SCALE	产 品 料 号 PART NO.	XD-GX16-NP-F	单 位 UNITS	mm	
			X.XXX ±0.10						
序号 No.	变更内容 MODIFY CONTENT	日期 MODIFY DATE	Angle ±3.0°	投 影 Projection		材 料 MATERIAL	页 次 SHEET	1/1	