
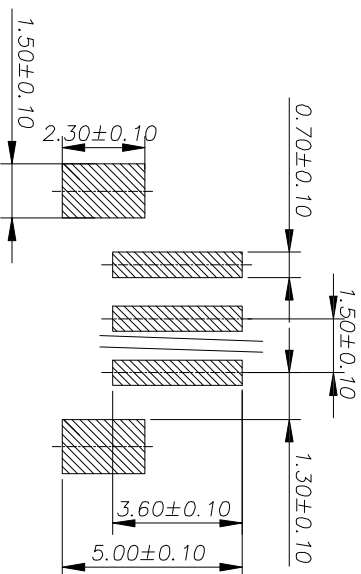

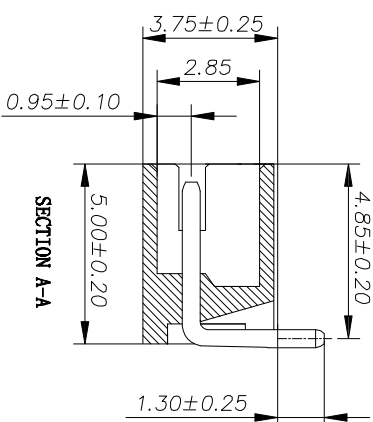
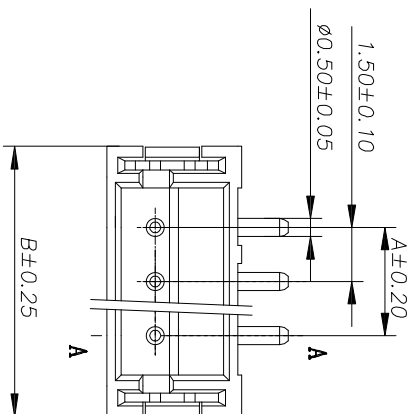
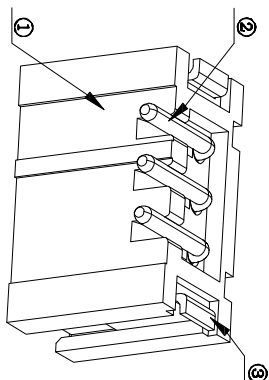




RECOMMEND PCB LAYOUT
TOLERANCE: ±0.10

Specifications:
Current Rating: 1A
Voltage Rating: 50V AC/DC
Contact Resistance: 20 Milliohms Max
Contact Resistance: 500MΩ/min
Withstanding Voltage: 500V AC/min
Operating Temperature Range: -25°C ~ +85°C

Poles	Part No.	Dimension mm	
		A	B
2	W-1501N02P-0200	1.5	6.0
3	W-1501N03P-0200	3.0	7.5
4	W-1501N04P-0200	4.5	9.0
5	W-1501N05P-0200	6.0	10.5
6	W-1501N06P-0200	7.5	12.0
7	W-1501N07P-0200	9.0	13.5
8	W-1501N08P-0200	10.5	15.0
9	W-1501N09P-0200	12.0	16.5
10	W-1501N10P-0200	13.5	18.0
11	W-1501N11P-0200	15.0	19.5
12	W-1501N12P-0200	16.5	21.0
13	W-1501N13P-0200	18.0	22.5
14	W-1501N14P-0200	19.5	24.0
15	W-1501N15P-0200	21.0	25.5

序号	零件名称	数量	材料	备注
①	底座	1	LCP	
②	端子	N	黄铜	镀底, 镀锡
③	焊片	2	黄铜	镀底, 镀锡

TOLERANCE TABLE	
.0	±0.20
.00	±0.10
.000	±0.05

APPROVED:	DATE:	TITLE: 1501SMT-XP 立贴 (Pitch:1.5mm)			
CHECKED:	DATE:				
DRAWN: LYF	DATE: 2019-04-08	CLIENT P/N /	UNIT mm	SCALE free	REV. A
		FILE NO.	Ckmtw-1501-0020	REV. A	JLXI

深圳市灿科盟实业有限公司
CHANKLEMENT INDUSTRY CO., LTD