

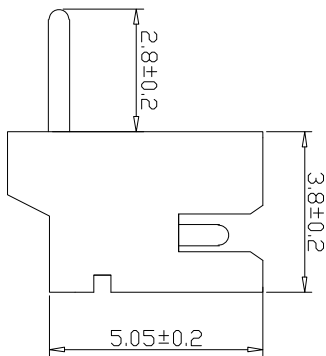
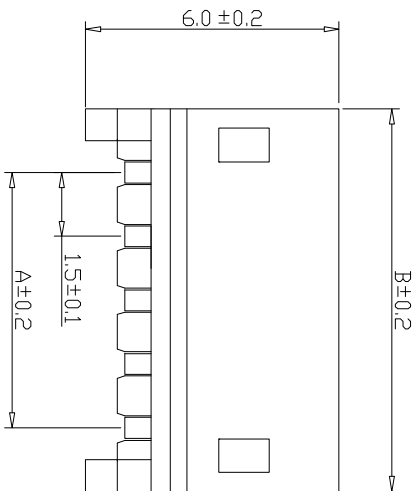




Ø0.5±0.2

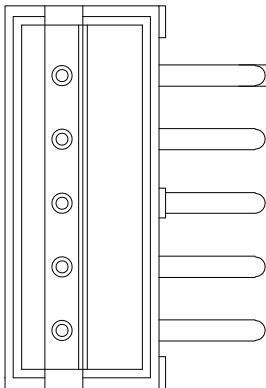

RECOMMEND PCB LAYOUT

TOLERANCE: ±0.05

Specifications:
Current Rating: 1A
Voltage Rating: 50V AC/DC
Contact Resistance: 20 Milliohms Max
Contact Resistance: 500mΩ/min
Withstanding Voltage: 500V.AC/min
Operating Temperture Range: -25°C ~ +85°C

Material:
Contact: Brass
Plastic: PA66 UL94V-0/2
Plating: Tin Plating

Poles	Part No.	Dimension mm	
		A	B
2	W-1501R02P-0200	1.5	4.5
3	W-1501R03P-0200	3.0	6.0
4	W-1501R04P-0200	4.5	7.5
5	W-1501R05P-0200	6.0	9.0
6	W-1501R06P-0200	7.5	10.5
7	W-1501R07P-0200	9.0	12.0
8	W-1501R08P-0200	10.5	13.5
9	W-1501R09P-0200	12.0	15.0
10	W-1501R10P-0200	13.5	16.5
11	W-1501R11P-0200	15.0	18.0
12	W-1501R12P-0200	16.5	19.5
13	W-1501R13P-0200	18.0	21.0
14	W-1501R14P-0200	19.5	22.5
15	W-1501R15P-0200	21.0	24.0

TOLERANCE TABLE		APPROVED:	DATE:	kmtw 深圳市灿科盟实业有限公司 CHANKLEMENT INDUSTRYCO., LTD					
		CHECKED:	DATE:	TITLE: 1501R-XP 带定位 米黄色 (Pitch:1.5mm)					
		CLIENT P/N /							
.0	±0.20	DRAWN: LYF	DATE: 2019-04-08	UNIT	mm	SCALE	free		
.00	±0.10			FILE NO.	Ckmtw-1501-0019	REV.	A	JLXI	
.000	±0.05								