

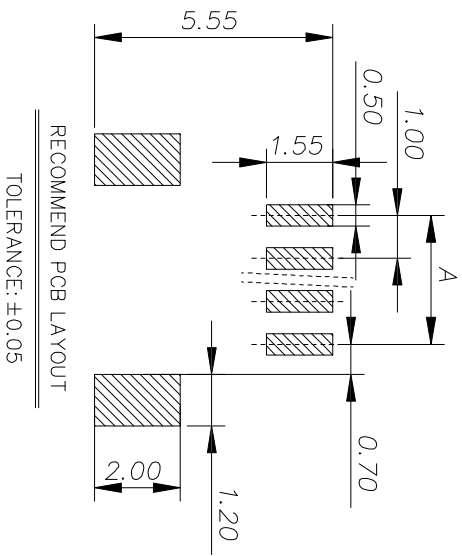
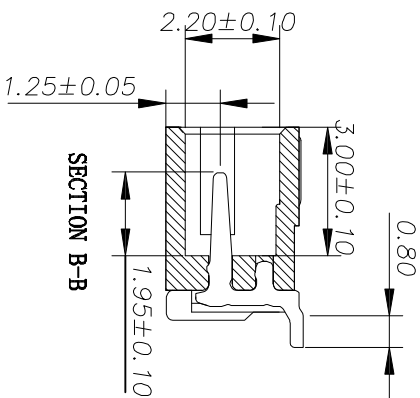
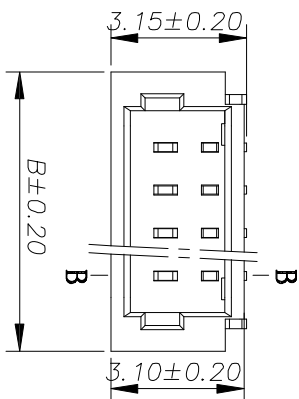


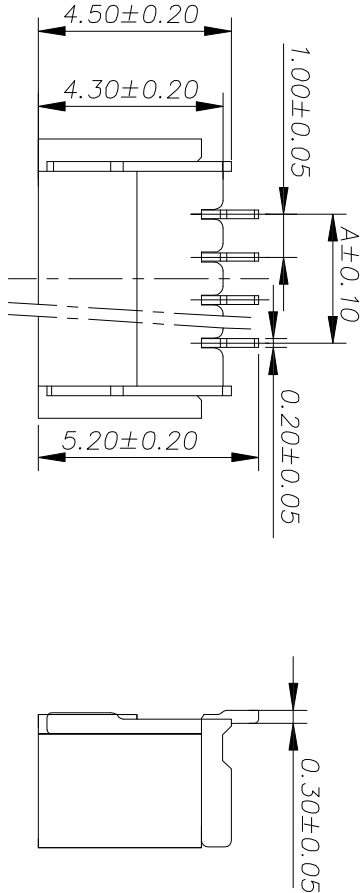

RECOMMEND PCB LAYOUT
TOLERANCE: ±0.05

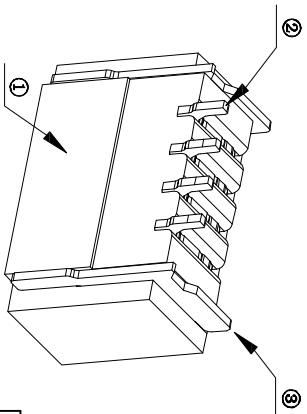

Specifications:
Current Rating: 1A
Voltage Rating: 50V AC/DC
Contact Resistance: 20 Milliohms Max
Contact Resistance: 100MΩ/min
Withstanding Voltage: 500V AC/min
Operating Temperature Range: -25°C ~ +85°C

Poles	Part No.	Dimension mm	
		A	B
2	W-1001M02P-R000	1.0	4.5
3	W-1001M03P-R000	2.0	5.5
4	W-1001M04P-R000	3.0	6.5
5	W-1001M05P-R000	4.0	7.5
6	W-1001M06P-R000	5.0	8.5
7	W-1001M07P-R000	6.0	9.5
8	W-1001M08P-R000	7.0	10.5
9	W-1001M09P-R000	8.0	11.5
10	W-1001M10P-R000	9.0	12.5
11	W-1001M11P-R000	10.0	13.5
12	W-1001M12P-R000	11.0	14.5
13	W-1001M13P-R000	12.0	15.5
14	W-1001M14P-R000	13.0	16.5
15	W-1001M15P-R000	14.0	17.5

序号	零件名称	数量	材料	备注
①	底座	1	LCP	
②	端子	N	磷铜	磷底, 镀锡
③	焊片	2	黄铜	镍底, 镀锡

TOLERANCE TABLE

	±0.20
.0	±0.10
.00	±0.05
.000	±0.05

APPROVED:	DATE:	TITLE: SH1.0SMT-XP 卧贴 (Pitch:1.5mm) 深圳市灿科盟实业有限公司 Ckmtw CHANKLEMENT INDUSTRYCO., LTD			
CHECKED:	DATE:				
DRAWN:	DATE:				
LYF	2019-04-08	CLIENT P/N	/	UNIT	mm
		SCALE	free	REV.	A
		FILE NO.	Ckmtw-SH10-0022	REV.	1
				REV.	1