
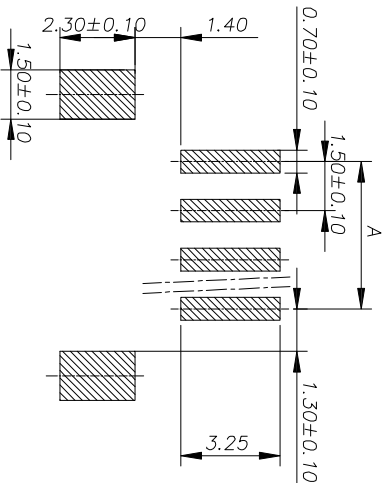
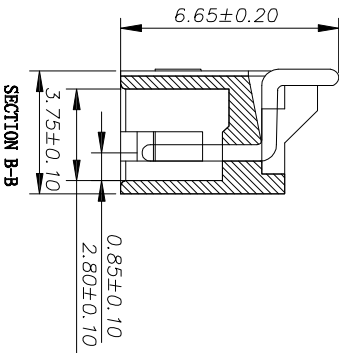
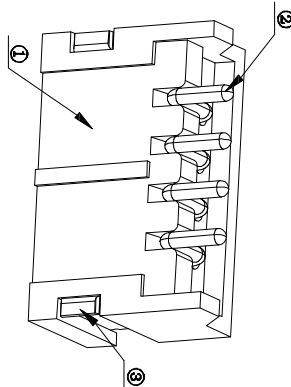

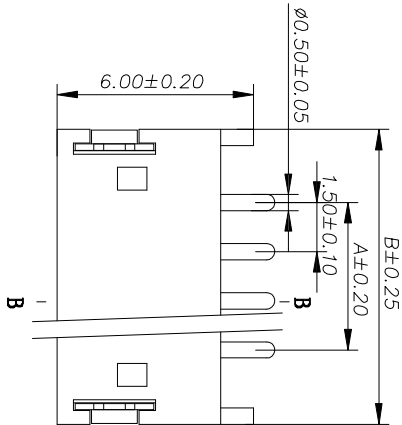




RECOMMEND PCB LAYOUT
TOLERANCE: ± 0.10

序 号	零件名称	数 量	材 料	备 注
-----	------	-----	-----	-----

①	基 座	1	LCP	
②	端 子	N	黄铜	镍底, 镀锡
③	焊 片	2	黄铜	镍底, 镀锡

TOLERANCE TABLE

	TOLERANCE
.0	± 0.20
.00	± 0.10
.000	± 0.05

APPROVED:

DATE:

CHECKED:

DATE:

DRAWN:

DATE:

LXF

2019-04-08

深圳市灿科盟实业有限公司
CHANKLEMENT INDUSTRY CO., LTD

TITLE:

1501SMT-XP 卧贴 (Pitch:1.5mm)

CLIENT P/N

/

UNIT

mm

SCALE

free

FILE NO.

Ckmtw-1501-0021

REV. A

DLXI

Poles	Part No.	Dimension mm	
		A	B
2	W-1501M02P-0200	1.5	6.0
3	W-1501M03P-0200	3.0	7.5
4	W-1501M04P-0200	4.5	9.0
5	W-1501M05P-0200	6.0	10.5
6	W-1501M06P-0200	7.5	12.0
7	W-1501M07P-0200	9.0	13.5
8	W-1501M08P-0200	10.5	15.0
9	W-1501M09P-0200	12.0	16.5
10	W-1501M10P-0200	13.5	18.0
11	W-1501M11P-0200	15.0	19.5
12	W-1501M12P-0200	16.5	21.0
13	W-1501M13P-0200	18.0	22.5
14	W-1501M14P-0200	19.5	24.0
15	W-1501M15P-0200	21.0	25.5

Specifications:
Current Rating: 1A
Voltage Rating: 50V AC/DC
Contact Resistance: 20 Milliohms Max
Contact Resistance: 500M Ω /min
Withstanding Voltage: 500V AC/min
Operating Temperture Range: -25°C ~ +85°C