
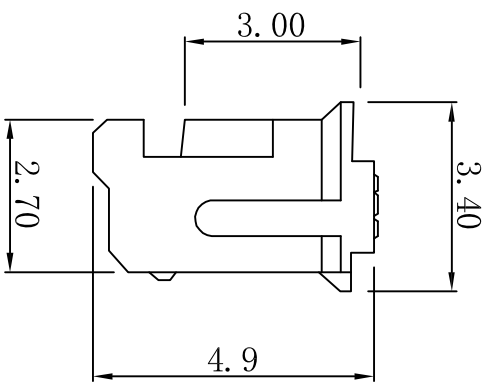
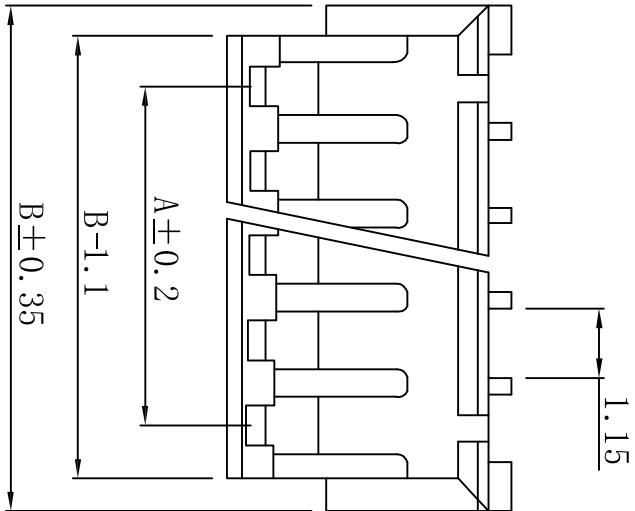


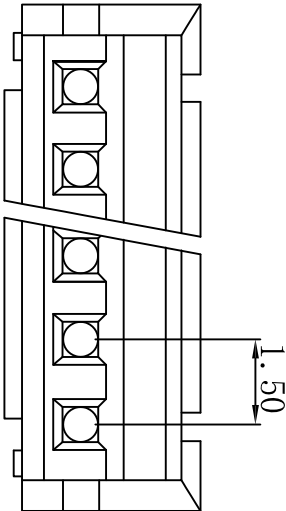

Specifications:
Current Rating: 1A
Voltage Rating: 50V AC/DC
Contact Resistance: 20 Milliohms Max
Contact Resistance: 500MΩ/min
Withstanding Voltage: 500V AC/min
Operating Temperature Range: -25°C ~ +85°C

Material:
Insulation: PA66 UL94-V0

Poles	Part No.	Dimension mm	
		A	B
2	2-1501H02P-0000	1.5	4.5
3	2-1501H03P-0000	3.0	6.0
4	2-1501H04P-0000	4.5	7.5
5	2-1501H05P-0000	6.0	9.0
6	2-1501H06P-0000	7.5	10.5
7	2-1501H07P-0000	9.0	12.0
8	2-1501H08P-0000	10.5	13.5
9	2-1501H09P-0000	12.0	15.0
10	2-1501H10P-0000	13.5	16.5
11	2-1501H11P-0000	15.0	18.0
12	2-1501H12P-0000	16.5	19.5
13	2-1501H13P-0000	18.0	21.0
14	2-1501H14P-0000	19.5	22.5
15	2-1501H15P-0000	21.0	24.0
16	2-1501H16P-0000	22.5	25.5

APPROVED:	DATE:	深圳市灿科盟实业有限公司 CHANKLEMENT INDUSTRYCO., LTD			
CHECKED:	DATE:	TITLE: 1501H-xP 白色 (Pitch:1.5mm)			
DRAWN:	DATE:	CLIENT P/N		/	
LYF	2019-04-08	UNIT	mm	SCALE	free
		FILE NO.	Ckmtw-1501-0017	REV.	A J LXI

TOLERANCE TABLE

.0	±0.20
.00	±0.10
.000	±0.05