



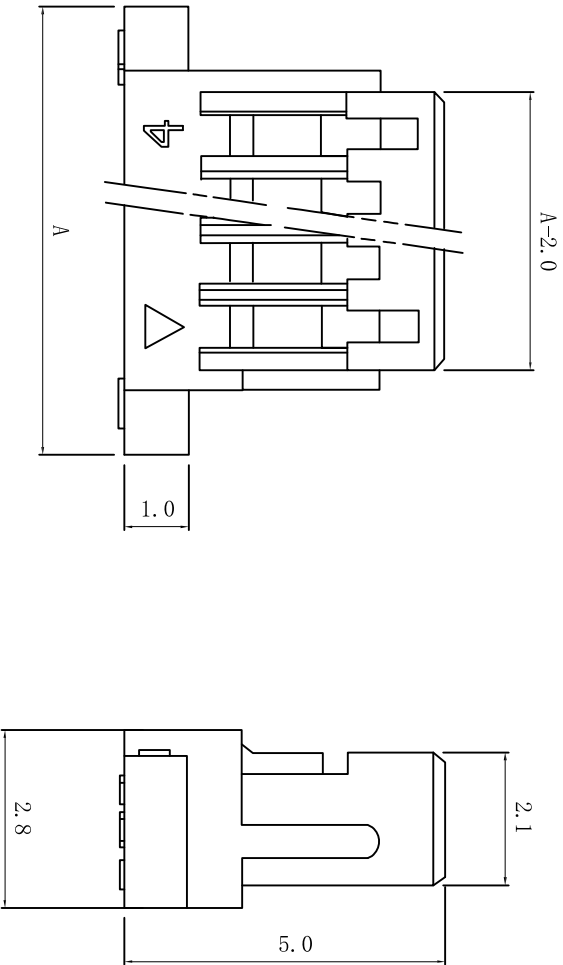

Specifications:
Current Rating: 1A
Voltage Rating: 50V AC/DC
Contact Resistance:20 Milliohms Max
Contact Resistance:100mW/min
Withstanding Voltage: 500V.AC/min
Operating TemPerture Range:-25°C~+85°C

Material:
Insulation: PA66

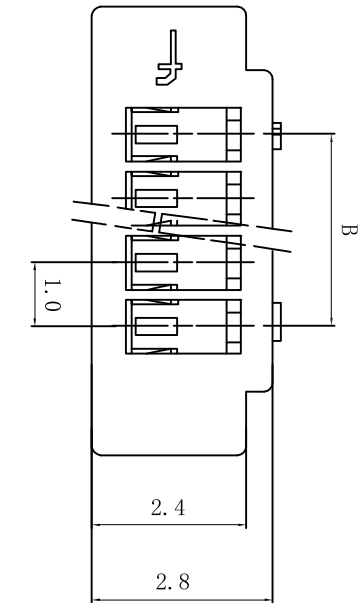

Poles	Part No.	Di mensi ons mm	
		A	B
2	2-1001H02P-0000	5.0	1.0
3	2-1001H03P-0000	6.0	2.0
4	2-1001H04P-0000	7.0	3.0
5	2-1001H05P-0000	8.0	4.0
6	2-1001H06P-0000	9.0	5.0
7	2-1001H07P-0000	10.0	6.0
8	2-1001H08P-0000	11.0	7.0
9	2-1001H09P-0000	12.0	8.0
10	2-1001H10P-0000	13.0	9.0
11	2-1001H11P-0000	14.0	10.0
12	2-1001H12P-0000	15.0	11.0
13	2-1001H13P-0000	16.0	12.0
14	2-1001H14P-0000	17.0	13.0
15	2-1001H15P-0000	18.0	14.0
16	2-1001H16P-0000	19.0	15.0

APPROVED:		DATE:	Ckmtw 深圳市灿科盟实业有限公司 CHANKLEMENT INDUSTRYCO., LTD					
CHECKED:		DATE:	TITLE: SH1.0H-xP (Pitch:1.0mm)					
DRAWN: LYF		DATE: 2019-04-08	CLIENT P/N /					
TOLERANCE TABLE								
.0	±0.20							
.00	±0.10							
.000	±0.05							
		UNIT	mm	SCALE	free	⌀	≡	
		FILE NO.	Ckmtw-SH10-0020	REV.	A	JLXI		