

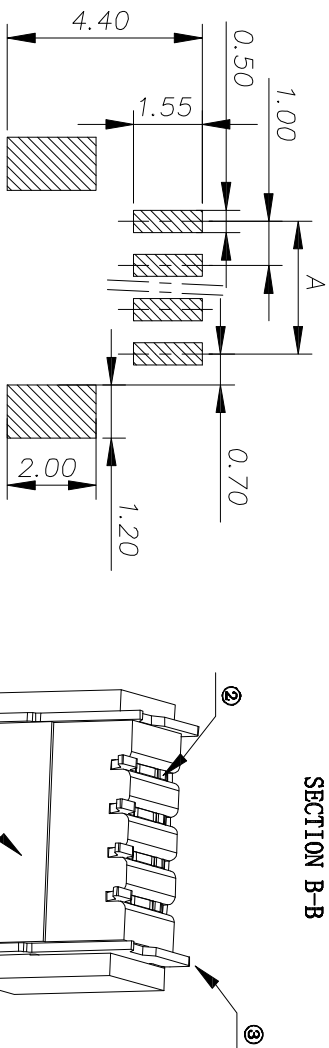
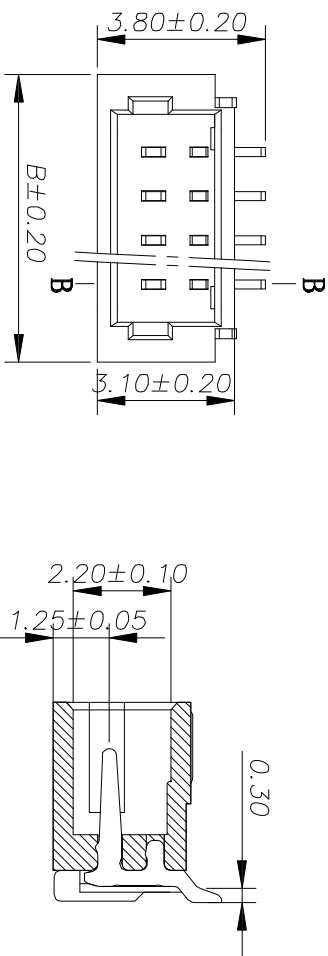


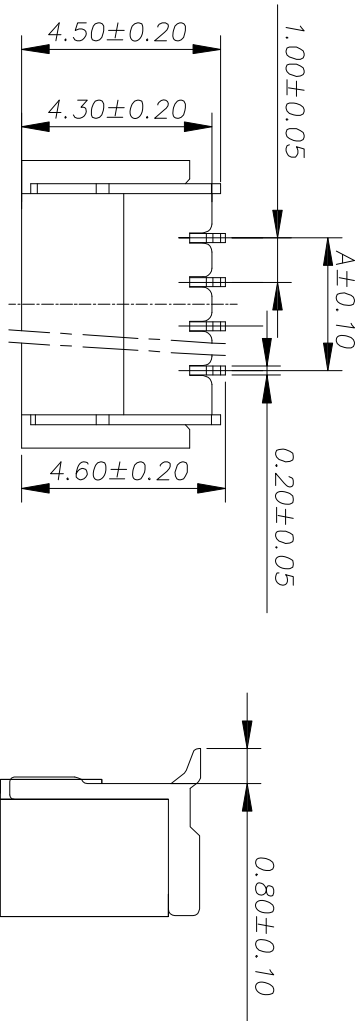

RECOMMEND PCB LAYOUT
TOLERANCE: ±0.05

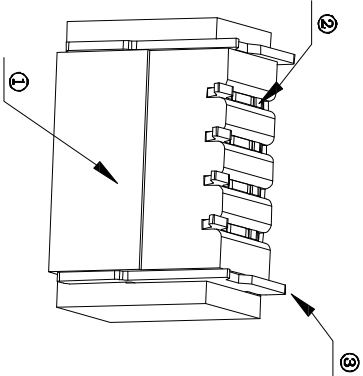

Specifications:
Current Rating: 1A
Voltage Rating: 50V AC/DC
Contact Resistance: 20 Milliohms Max
Contact Resistance: 100MΩ/min
Withstanding Voltage: 500V AC/min
Operating Temperature Range: -25°C ~ +85°C

Poles	Dimension mm	
	A	B
2	1.0	4.5
3	2.0	5.5
4	3.0	6.5
5	4.0	7.5
6	5.0	8.5
7	6.0	9.5
8	7.0	10.5
9	8.0	11.5
10	9.0	12.5
11	10.0	13.5
12	11.0	14.5
13	12.0	15.5
14	13.0	16.5
15	14.0	17.5

序号	零件名称	数量	材料	备注
①	底座	1	LCP	
②	端子	N	磷铜	镍底, 镀锡
③	焊片	2	黄铜	镍底, 镀锡

TOLERANCE TABLE

	±0.20
.0	±0.10
.00	±0.05
.000	

APPROVED:	DATE:	深圳市灿科盟实业有限公司 Ckmtw CHANKLEMENT INDUSTRYCO., LTD			
CHECKED:	DATE:				
DRAWN:	DATE:				
LYF	2019-04-08	CLIENT P/N	W-1001N08P-R000	UNIT	mm
		SCALE	free	REV.	A
		FILE NO.	Ckmtw-SH10-0021	REV.	JLXI