
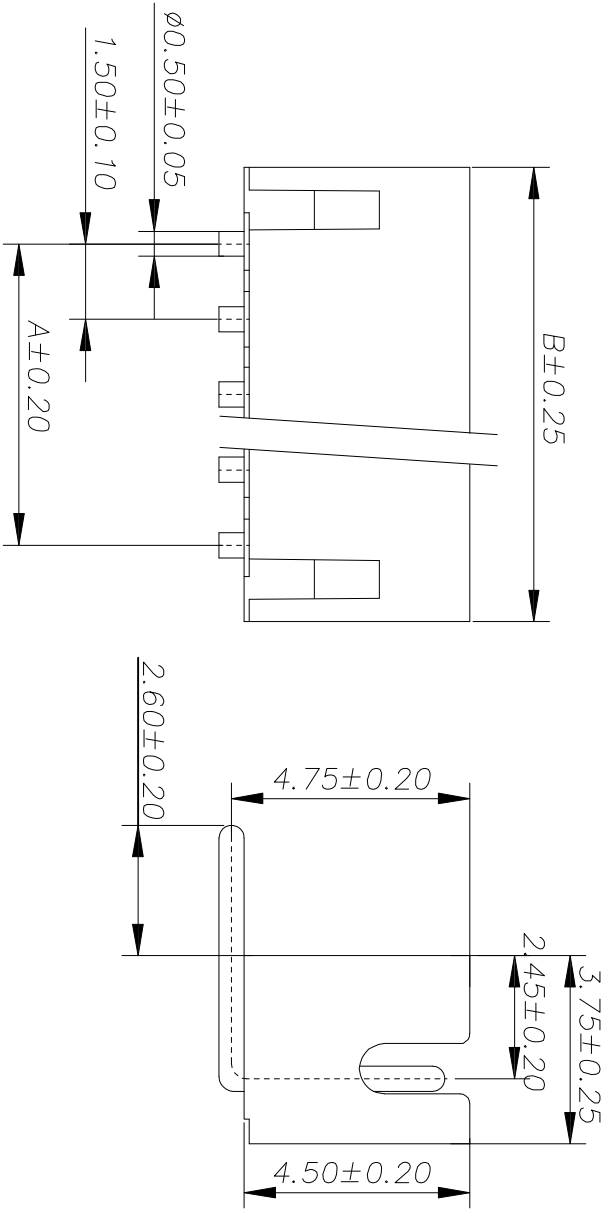


Specifications:
Current Rating: 1A
Voltage Rating: 50V AC/DC
Contact Resistance: 20 Milliohms Max
Contact Resistance: 500mΩ/min
Withstanding Voltage: 500V.AC/min
Operating Temperture Range: -25°C ~ +85°C

Material:
Contact: Brass
Plastic: PA66 UL94V-0/2
Plating: Tin Plating

Poles	Part No.	Dimension mm	
		A	B
2	W-1501R02P-0000	1.5	4.5
3	W-1501R03P-0000	3.0	6.0
4	W-1501R04P-0000	4.5	7.5
5	W-1501R05P-0000	6.0	9.0
6	W-1501R06P-0000	7.5	10.5
7	W-1501R07P-0000	9.0	12.0
8	W-1501R08P-0000	10.5	13.5
9	W-1501R09P-0000	12.0	15.0
10	W-1501R10P-0000	13.5	16.5
11	W-1501R11P-0000	15.0	18.0
12	W-1501R12P-0000	16.5	19.5
13	W-1501R13P-0000	18.0	21.0
14	W-1501R14P-0000	19.5	22.5
15	W-1501R15P-0000	21.0	24.0

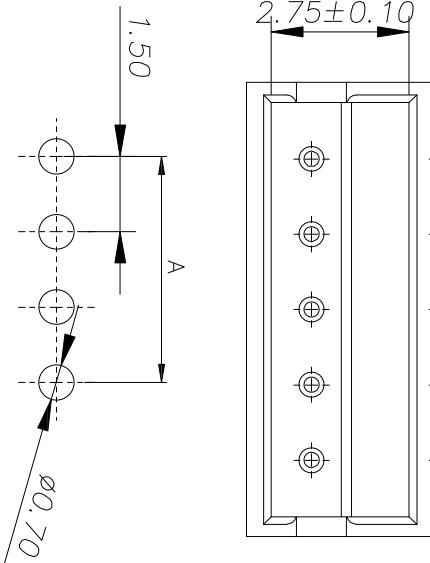

RECOMMEND PCB LAYOUT

TOLERANCE: ± 0.05

APPROVED:		DATE:		kmtw CHANKLEMENT 深圳市灿科盟实业有限公司 INDUSTRY CO., LTD											
CHECKED:		DATE:		TITLE: 1501R-XP 无定位 (Pitch:1.5mm)											
DRAWN:		DATE:		CLIENT P/N /											
.0		±0.20		UNIT		mm		SCALE		free					
.00		±0.10		UNIT		mm		SCALE		free					
.000		±0.05		LYF		2019-04-08		FILE NO.		Ckmtw-1501-0022		REV. A		JLXI	