



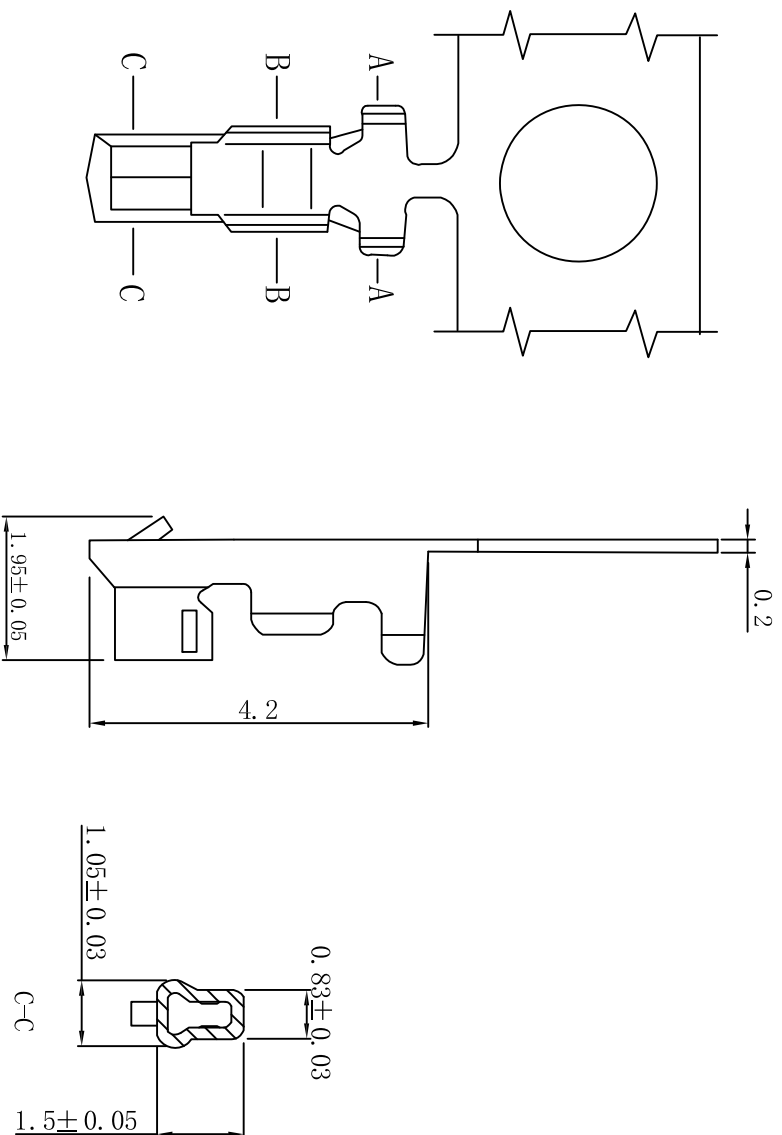

Specifications:
Current Rating: 1A
Voltage Rating: 125V AC/DC
Contact Resistance: 20 Milliohms Max
Contact Resistance: 500MΩ/min
Withstanding Voltage: 500V.AC/min
Operating Temperature Range: -25°C ~ +85°C
APPLICABLE WIRE: AWG32~26

Material:
Contact: Phosphor Bronze T=0.2mm
Plating: Tin Plating

技术要求:
1. 表面无损伤、变形、尖角、纹点、毛刺等缺陷。
镀层光洁，不准有发黑、脱锌现象。
2. 产品一般光滑度为 $\nabla_{0.012}$

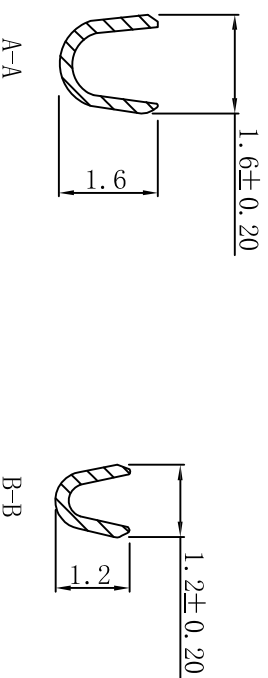

APPROVED:		DATE:		Ckmtw 深圳市灿科盟实业有限公司 CHANKLEMENT INDUSTRYCO., LTD					
CHECKED:		DATE:		TITLE: 1501T-磷铜镀锡					
TOLERANCE TABLE				PART. NO. 3-1501T012-D000					
.0	±0.30	DRAWN:		UNIT mm SCALE free  					
.00	±0.15	DATE:		FILE NO. Ckmtw-1501-0016 REV. A JLY					
.000	±0.05	LYF		2019-04-08					