
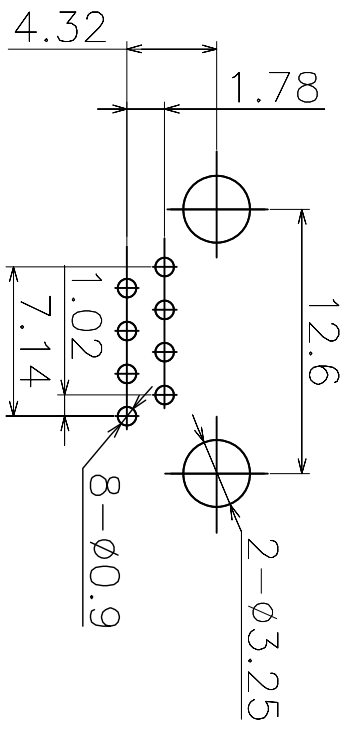

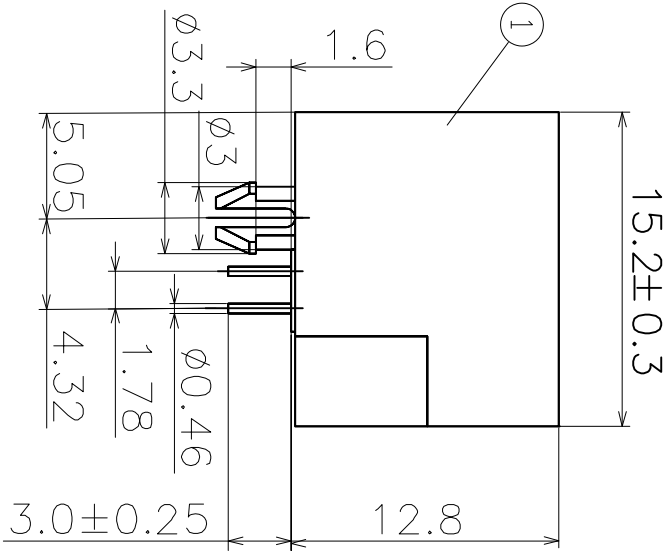


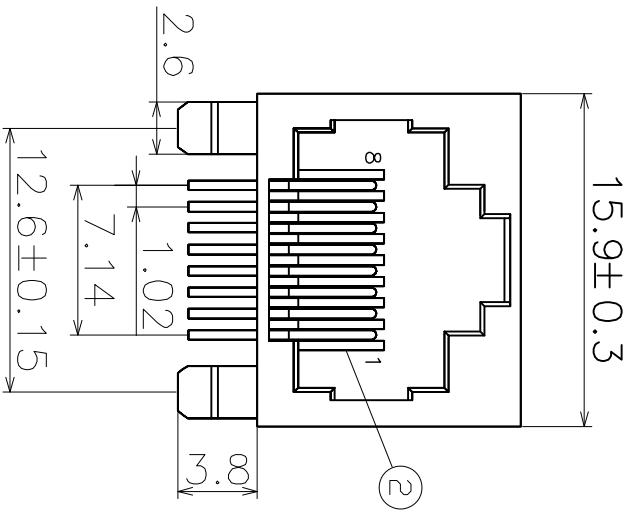

PCB LAYOUT

RECOMMENDED

技术参数 (SPECIFICATION) :
额定电流 (CURRENT RATING) : 1.5A
额定电压 (VOLTAGE RATING) : 125V
接触电阻 (CONTACT RESISTANCE) : ≤30mΩ
绝缘电阻 (INSULATION RESISTANCE) : >500MΩ
耐 压 (DIELECTRIC STRENGTH) : 500V AC/(50HZ) /Min
温度范围 (TEMPERATURE RANGE) : -40~+70 ° C
插拔力 (MATING AND UNMATING FORCE) : 3~20N
寿 命 (DURABILITY) : 750 CYCLES MIN

RECOMMENDED										APPROVED:		DATE:		 深圳市灿科盟实业有限公司 CHANKLEMENT INDUSTRYCO., LTD						
										CHECKED:	DATE:									
										TOLERANCE TABLE										
										.0 ±0.30										
										.00 ±0.20										
2	插针	PHOSPHOR BRONZE	8	"FU"		DRAWN:		DATE:		2023-01-13										
1	塑座	PA46	1	BLACK		LYF														
序号	名称	材料	用量	镀层/颜色	备注	.000	±0.05													
FILE NO. Ckmtw-RJ45-0019																				
PROD. NO. R-RJ45R08P-A006																				
UNIT mm SCALE free																				
TITLE: RJ45-8P/8C 56 全塑无灯 弯插 黑色																				
 																				