


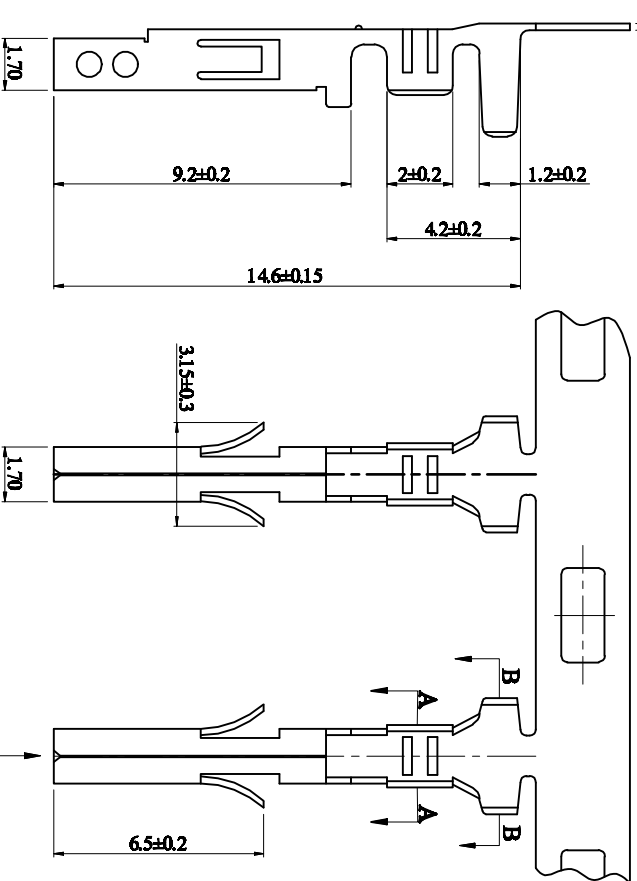


技术参数 (SPECIFICATIONS)

额定电压 250V AC/DC
Voltage rating 250V AC/DC
额定电流 7.0A AC/DC
Current rating 7.0A AC/DC
耐压值: 1500V AC/minute
Withstand voltage: 1500V AC/minute
绝缘电阻 1000MΩ/V·MIN
Insulation resistance 1000MΩ/V·MIN
接触电阻 0.015 Ω MAX(初始值)
Contact resistance 0.015 Ω MAX(initial)
工作温度: -25°C~+85°C
Working Temperature -25°C~+85°C
适用线规: 24~20AWG
Applicable Wire 24~20AWG
间距 4.2 mm
Pitch 4.2 mm
材料 (MATERIAL)
端子 磷青铜
Terminal: Phosphor bronze

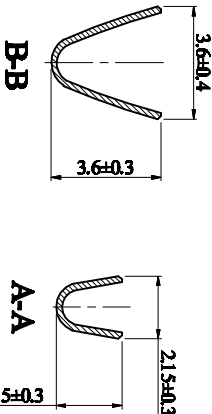

PRODUCT ID	PRODUCT NAME	MATERIALS	FINISH	AWG	Qty/roll
	SS57-T	Phosphor Bronze	TIN	24~20	6500pcs

深圳市灿科盟实业有限公司
CHANKLEMENT INDUSTRY CO., LTD

APPROVED: DATE:
CHECKED: DATE:

TITLE:

5557TS 母端子 高脚 (MX4.2端子)

TOLERANCE TABLE	
.0	±0.20
.00	±0.10
.000	±0.05

DRAWN: L.Y.F
DATE: 2008-04-07

CLIENT P/N	UNIT	mm	SCALE	free	REV.
C2902704					A
FILE NO.	3-5557T012-DF02				