



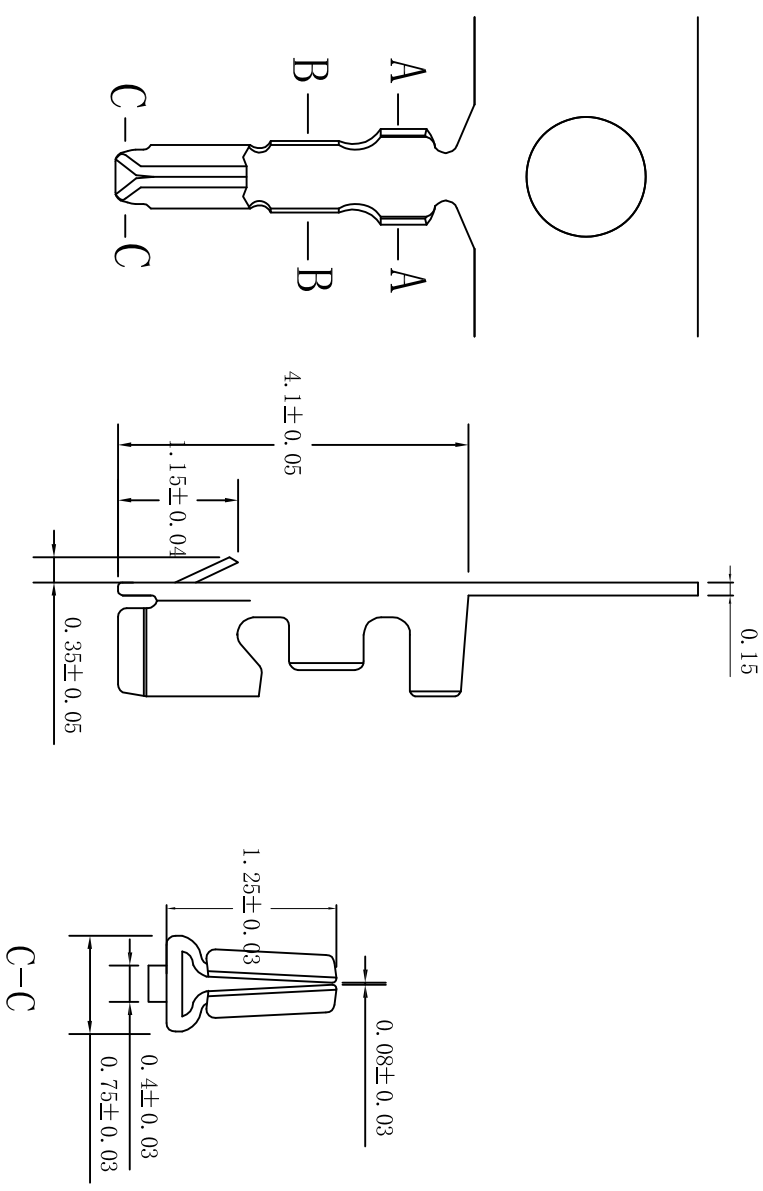

Specifications:
Current Rating: 1A
Voltage Rating: 50V AC/DC
Contact Resistance: 20 Milliohms Max
Contact Resistance: 100mW/min
Withstanding Voltage: 500V AC/min
Operating Temperature Range: 25°C ~ +85°C
APPLICABLE WIRE: AWG32~28

Material:
Contact: Phosphor Bronze T=0.15mm
Plating: Tin Plating

技术要求:
1. 表面无损伤、变形、尖角、纹点、毛刺等缺陷。
镀层光洁，不准有发黑、脱层现象。
2. 产品一般光滑度为 $\nabla^{0.02}$

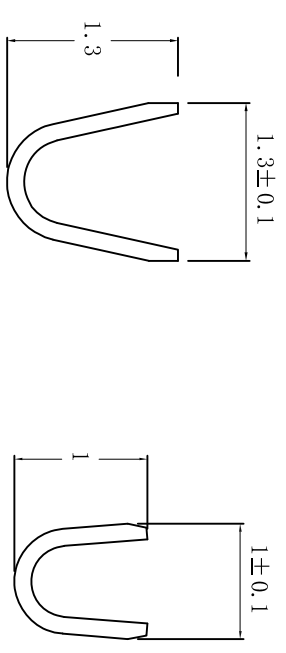

A-A

B-B

C-C

APPROVED:		DATE:		C 深圳市灿科盟实业有限公司 kmtw CHANKEMENG INDUSTRYCO., LTD								
CHECKED:		DATE:		TITLE: SH1.0T-磷铜镀锡								
TOLERANCE TABLE				PART. NO.		3-1001T012-D000						
. 0	±0. 20	DRAWN:		DATE:		UNIT		mm	SCALE	free	⌀	≡
. 00	±0. 10	LYF		2019-04-08		FILE NO.		Ckmtw-SH10-0019	REV.	A	JLXI	
. 000	±0. 05											