



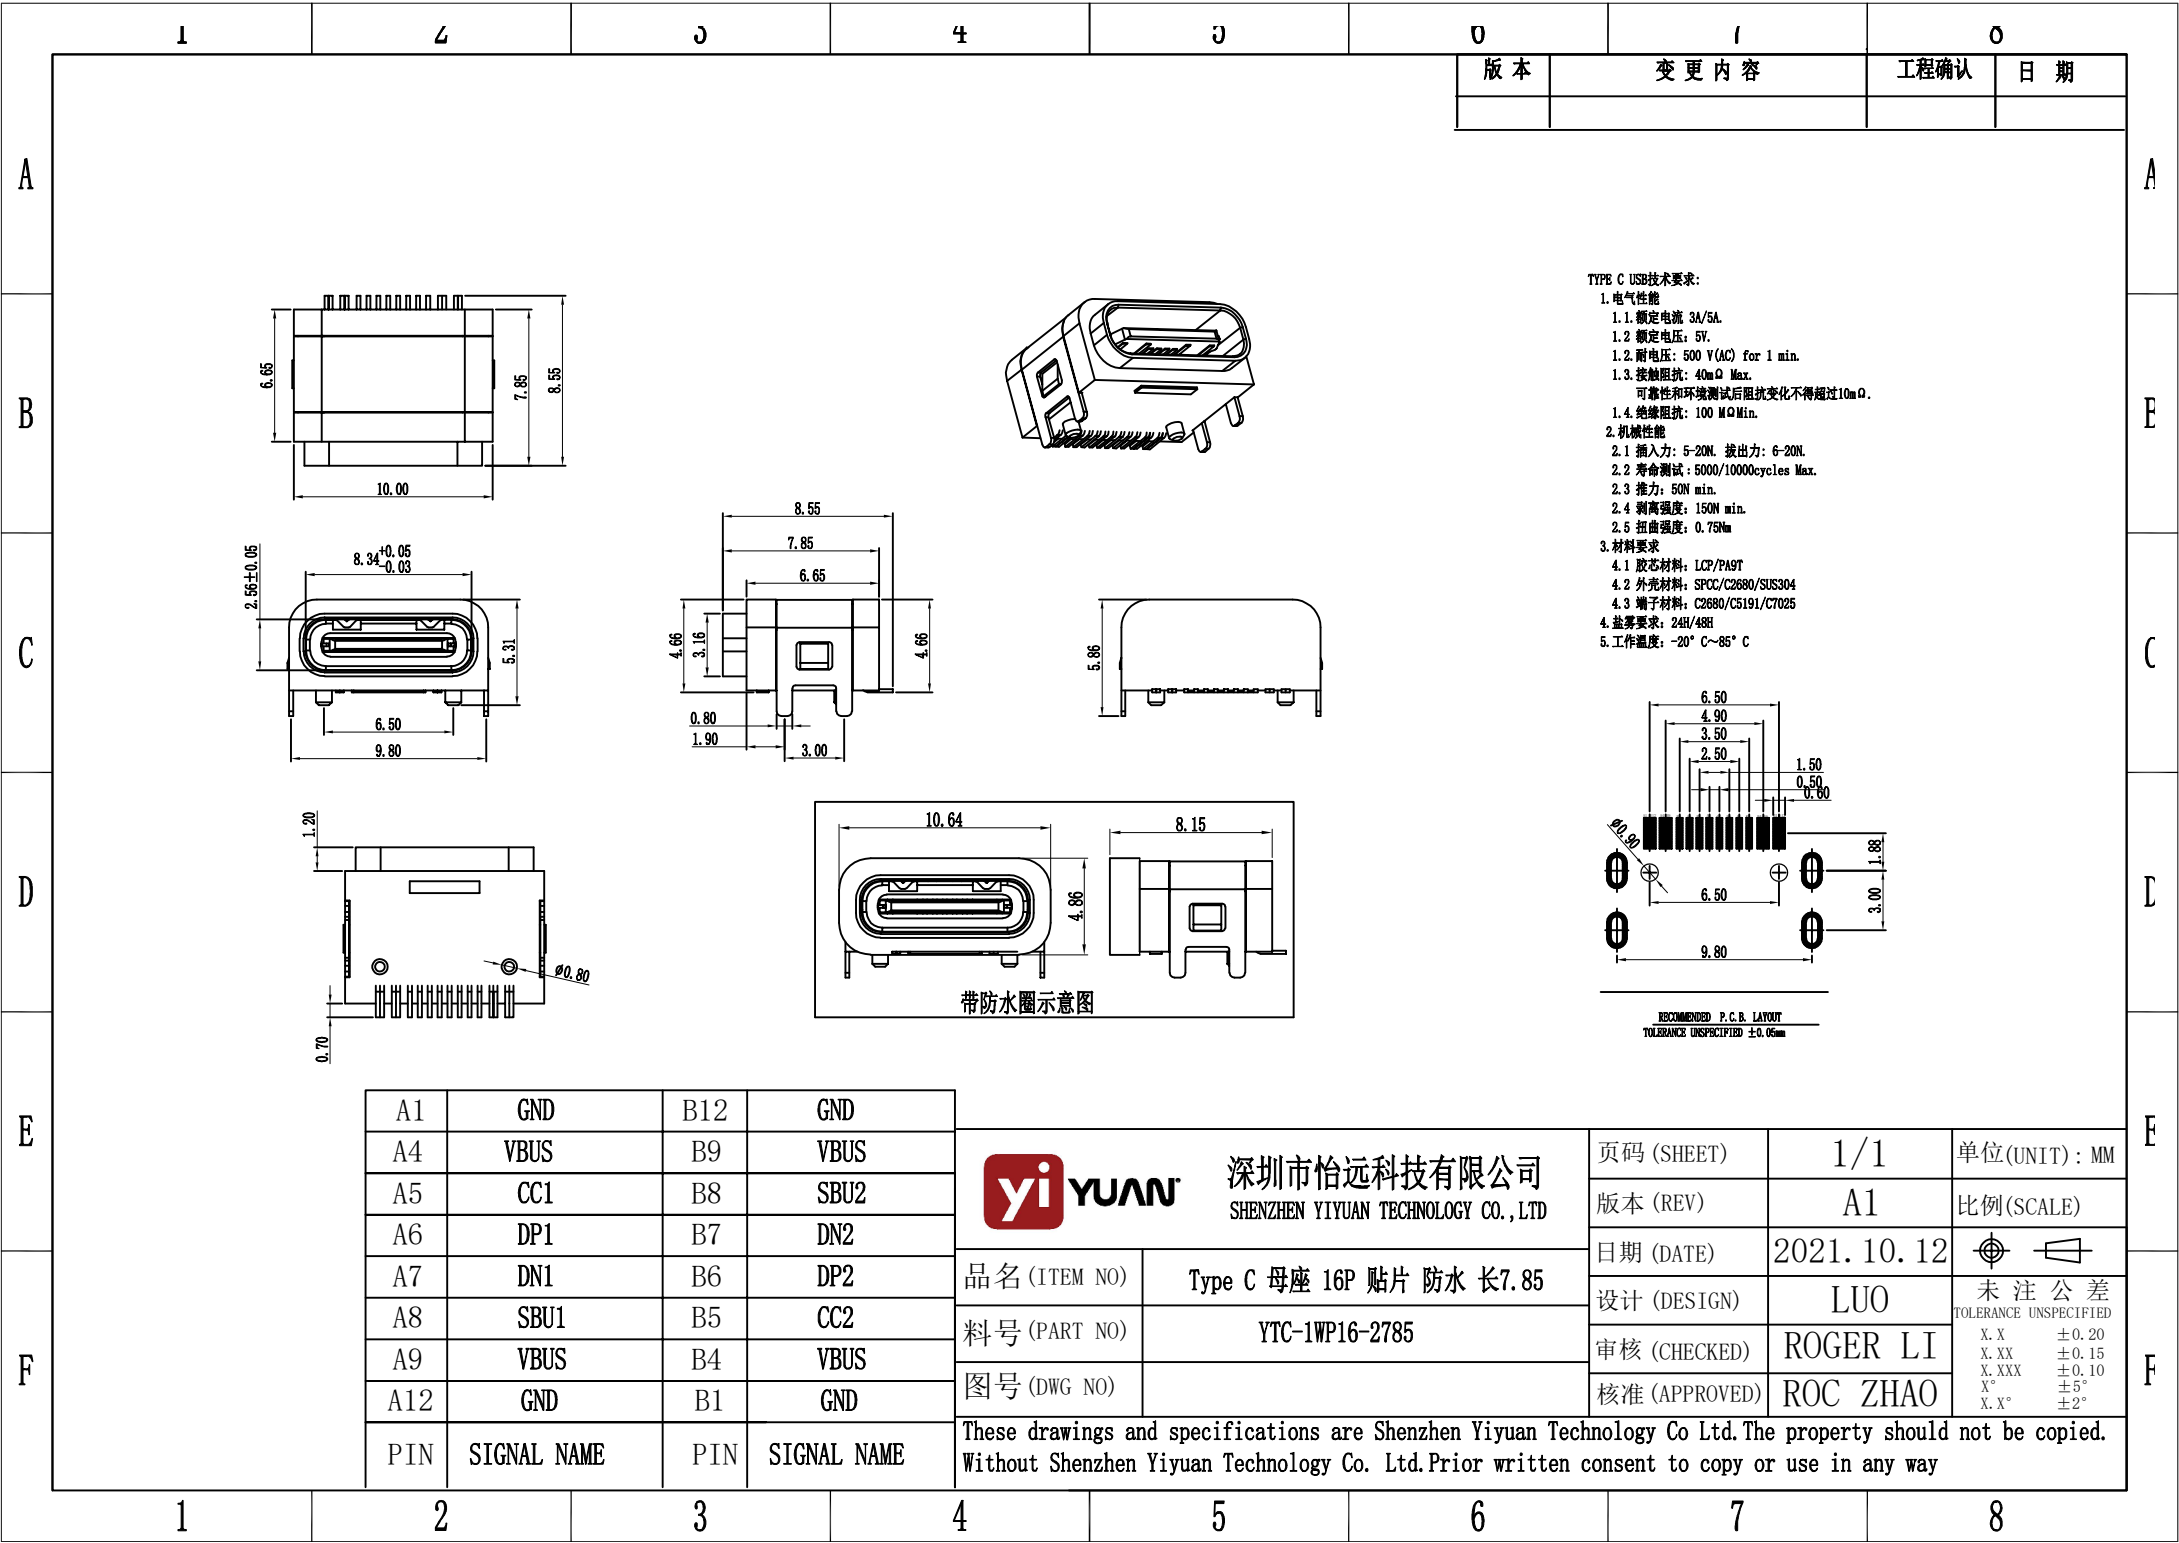

TYPE C USB技术要求:

1. 电气性能
 - 1.1. 额定电流: 3A/5A
 - 1.2. 额定电压: 5V
 - 1.2. 耐压: 500 V(AC) for 1 min.
 - 1.3. 接触阻抗: 40mΩ Max.
 - 1.4. 绝缘阻抗: 100 MΩ Min.
2. 机械性能
 - 2.1. 插入力: 5-20N, 拔出力: 6-20N
 - 2.2. 寿命测试: 5000/10000cycles Max.
 - 2.3. 推力: 50N min.
 - 2.4. 剥离强度: 150N min.
 - 2.5. 扭曲强度: 0.75Nm
3. 材料要求
 - 4.1. 胶芯材料: LCP/PA9T
 - 4.2. 外壳材料: SPOC/C2680/SUS304
 - 4.3. 端子材料: C2680/C5191/C7025
 - 4.4. 盐雾要求: 24H/48H
 - 5. 工作温度: -20° C~85° C



RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm



深圳市怡远科技有限公司
SHENZHEN YIYUAN TECHNOLOGY CO.,LTD

页码 (SHEET)	1/1	单位(UNIT): MM
版本 (REV)	A1	比例(SCALE)
日期 (DATE)	2021. 10. 12	未注公差 TOLERANCE UNSPECIFIED
设计 (DESIGN)	LUO	X. X ±0.20
审核 (CHECKED)	ROGER LI	X. XX ±0.15
核准 (APPROVED)	ROC ZHAO	X. XXX ±0.10
		X° ±5°
		X. X° ±2°

These drawings and specifications are Shenzhen Yiyuan Technology Co Ltd. The property should not be copied. Without Shenzhen Yiyuan Technology Co. Ltd. Prior written consent to copy or use in any way