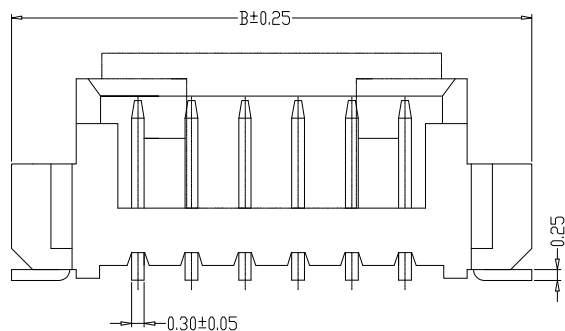


SPECIFICATIONS

- 1、Current Rating: 1A AC, DC
- 2、Voltage Rating: 125V AC, DC
- 3、Temperature Range: -25℃~+85℃
- 4、Contact Resistance: 20MΩ Max
- 5、Insulation Resistance: 100MΩ Min
- 6、Withstanding Voltang: 500V AC/minute
- 7、Material: Wafer Nylon46、UL94V-0
PIN Brass Tin-plated
Solder tad Brass Tin-plated

编 号	尺寸 (mm)	
	A	B
YTC-A1251-03AB	2.50	8.60
YTC-A1251-04AB	3.75	9.85
YTC-A1251-05AB	5.00	11.10
YTC-A1251-06AB	6.25	12.35

PCB LAYOUT

技术要求:

1. “ ”表示为重要尺寸:

B塑料为闭口结构 2P-7P以上外形尺寸3.70±0.25



深圳市怡远科技有限公司

SHENZHEN YIYUAN TECHNOLOGY CO., LTD

品名 (ITEM NO) 1.25间距闭口立贴 WAFER DIP TYPE

料号 (PART NO) YTC-A1251-**-AB

图号 (DWG NO)

页码 (SHEET)

1/1

单位(UNIT): MM


版本 (REV)

A1

比例(SCALE)

日期 (DATE)

2021. 10. 12



设计 (DESIGN)

LUO

审核 (CHECKED)

ROGER LI

核准 (APPROVED)

ROC ZHAO

GENERAL TOLERANCE

X.±0.25 X'.±2"

.X±0.20 .X'±1"

.XX±0.15 .XX'±0.5"

.XXX±0.10 .XXX'±0.5"

These drawings and specifications are Shenzhen Yiyuan Technology Co Ltd.The property should not be copied. Without Shenzhen Yiyuan Technology Co. Ltd.Prior written consent to copy or use in any way. Email at info@yiyuanswitches.com