
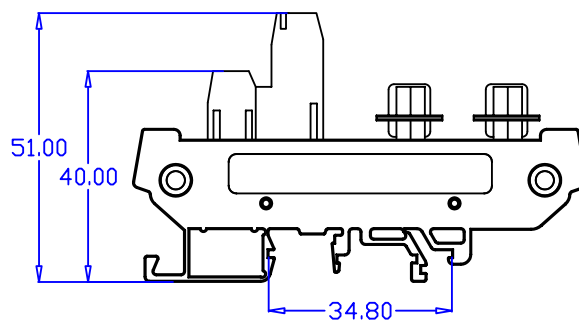
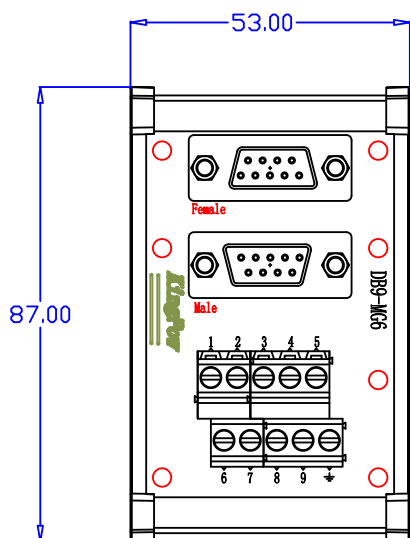


DB9-MG6

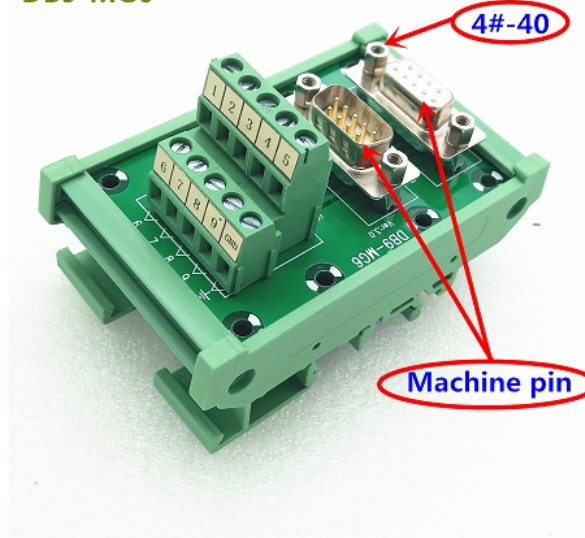

parameter table:

Num	Category	Describe
1	Max Current	1A
2	Cable gauge (AWG)	14-26 AWG
3	D_SUB connector:	Machine Pin
4	PCB Material	FR4
5	D_SUB Withstanding voltage	300V AC/MINUTE
6	D_SUB Operating temperature	-20℃ to 80℃
7	Rated voltage according to	UL:No
8	Rated current according to	UL:No
9	D_SUB Material:	INSULATOR:PBT 30%GF; CONTACT:COPPER ALLOY
10	Box size w/label	L110*W65*H55mm
11	Packing	

D-SUB9	Terminal
1	1
2	2
3	3
...	...
8	8
9	9
Shell	GND

Pin assignment

制作	Hero. Xu	日期	2021.11.03		名称	端子台	型号	DB9-MG6				
审核					版本	Ver:1.0	客户编号					
核准												
					摄影角度	图纸比例	第 1 张 共 1 张					
未注线性公差GB1804-m级 (单位:mm)						1:1	中山市肯博电子科技有限公司 www.kingpow.cn					
尺寸	≤3	3-6	6-30	30-120					120-400	400-1000	1000-2000	2000-4000
公差	0.1	0.15	0.2	0.3					0.5	0.8	1.2	2.0
					角度公差		± 0.5 °					