

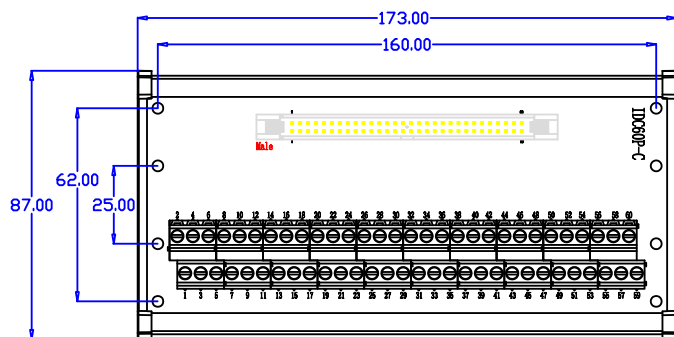
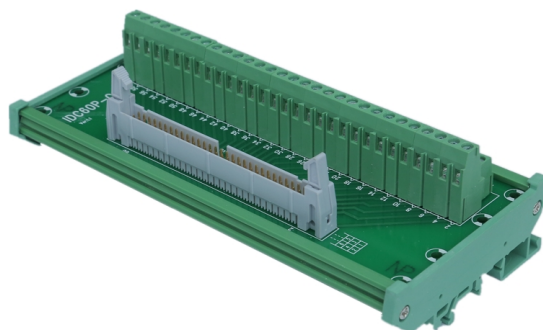


Pin number

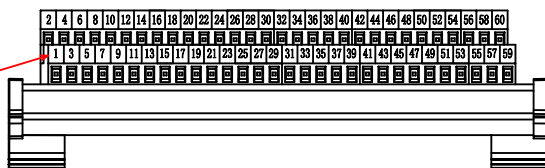

parameter table:

Num	Category	Describe
1	PCB Max Current	0.8A
2	Cable gauge (AWG)	14-26 AWG
3	IDC Pitch:	Pitch:2.54mm
4	PCB Material	FR4
5	IDC Withstanding voltage	300V AC/MINUTE
6	IDC Operating temperature	-20℃ to 105℃
7	Rated voltage according to	UL:E311899
8	Rated current according to	UL:E311899
9	IDC Material:	INSULATOR:PBT 30%GF; CONTACT:COPPER ALLOY
10	Box size w/label	L200*W95*H54mm /
11	Packing	



Pin assignment

制作	Hero. Xu	日期	2021.07.05			名称	端子台		型号	IDC60P-C	
审核						版本	Ver:1.0		客户编号		
核准											
						投影角度		图纸比例		第 1 张 共 1 张	
未注线性公差GB1804-m级 (单位mm)						角度公差 ± 0.5 °		1:1		中山市肯博电子科技有限公司 www.kingpow.cn	
尺寸	≤3	3-6	6-30	30-120	120-400	400-1000	1000-2000	2000-4000			
公差	0.1	0.15	0.2	0.3	0.5	0.8	1.2	2.0			