

3

2

1




△	PART NO.	COLOR
	7182-8730-10, △	DARK GRAY
	7182-8730-30, △	BLACK

注 記

- △ 1. 嵌合メス ハウジング品番: 7283-8730-30 ETC.
2. 適用端子品番: 7114-1680-02
3. 適用リヤ-ホルダー品番: 7157-4603-80

NOTES

- △ 1. MATING FEMALE HOUSING NO.
: 7283-8730-30 ETC.
2. APPLICABLE TERMINAL NO.
: 7114-1680-02
3. APPLICABLE REAR HOLDER NO.
: 7157-4603-80

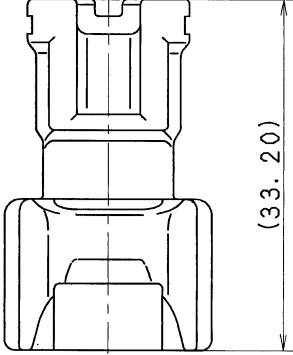

B

A

B

A

△	94.08.30	ADDED COLOR NO. & CHANGED FORM, △	C94-M128	K. S	CUSTOMER	CUSTOMER PART NO.	CUSTOMER DWG NO.	MATL. SPEC.	PBT	TREAT. & FIN.	ISSUE MARK												
LET	91.01.10	NEW	C91-L005	S. I	OFFICE		TRIAL PART NO.	NAME	SSD CONNECTOR HOUSING														
DATE		REVISION RECORD	NO.	CHKD	VENDOR				3P MALE														
GENERAL TOLERANCE																							
A	10MAX	50MAX	100MAX	250MAX	2500V	R	NEW	DWG TYPE	DWG SOURCE	DWG DATE	UNIT	SCL	ANGLE	PART NO.	CH. CODE	DWG NO.							
B	±0.15	±0.2	±0.3	±0.5	±0.75	±30'	0.1			91.01.10	mm	2/1	3	△	7182-8730-30	ETC.							
C	±0.2	±0.3	±0.5	±0.8	±1.4	±30'	0.1								7182-8730-30	:R							
SPECIFIED												MASS		9		94.09.06		94.09.05		89.11.01		94.08.30	
												YAZAKI CORPORATION											

3

2

1