
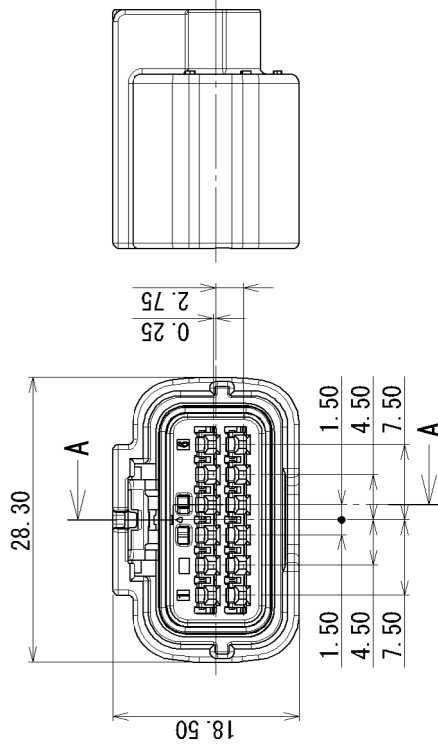


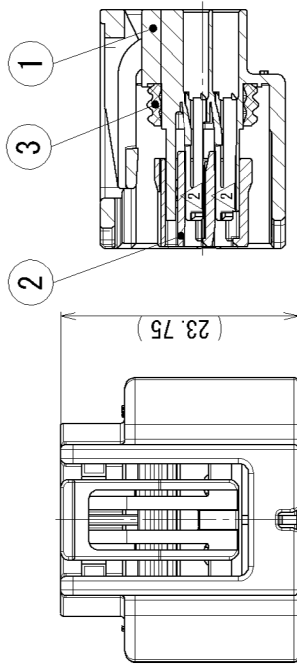

SUB ASSEMBLY PART NO. AND CH. CODE	NO.	PART NO. AND CH. CODE	△ PART NAME	MATERIAL	COLOR	QTY.
△ 7283-4038-30 ETC.	①	SEE TABLE 2 △	HS 025 12P SEALED HOUSING FEMALE	PBT	SEE TABLE 2 △	1
	②	7158-6587	HS 025 12P SEALED FRONT HOLDER FEMALE	PBT-G	NATURAL	1
	③	7137-2848-80	HS 025 12P SEALED PACKING	SILICONE RUBBER	BROWN	1

TABLE 2	SUB ASSEMBLY PART NO. AND CH. CODE	PART NO. AND CH. CODE	COLOR
	7283-4038-30	7183-4038-30	BLACK
△	7283-4038-40	7183-4038-40	LIGHT GRAY
△	7283-4038-10	7183-4038-10	DARK GRAY

SEC. A-A

- | | |
|-----------------------------------|---|
| △ 1. MATING PART NO. | : 7282-4038-30 ETC. |
| 2. APPLICABLE TERMINAL NO. | : 7116-4415-02, 7116-4416-02, 7116-4417-02 |
| 3. APPLICABLE SEAL RUBBER NO. | : 7158-3165-90, 7158-3166-60, 7158-3167-80, |
| | 7158-3168-80 |
| 4. APPLICABLE UNUSED CAVITY PLUG: | 7158-3169-40 |
| 注記 | |
| △ 1. かん合相手品番 : | 7282-4038-30 ETC. |
| 2. 適用端子品番 : | 7116-4415-02, 7116-4416-02, 7116-4417-02 |
| 3. 適用ゴム栓品番 : | 7158-3165-90, 7158-3166-60, 7158-3167-80, |
| | 7158-3168-80 |
| 4. 適用防水栓品番 : | 7158-3169-40 |

2 GENERAL TOLERANCE												
	10 MAX	50 MAX	100 MAX	250 MAX	250 MAX	250 OVR	R5 MAX	R10 MAX	R20 MAX	R20 OVR	ANGLE	ECCENT
A	±0.15	±0.2	±0.3	±0.5	±0.75						±3°	0.1
B	±0.2	±0.3	±0.55	±0.95	±1.4	±0.2	±0.3	±0.5	±2.5		±3°	0.1
C	±0.3	±0.5	±0.8	±1.4	±2						±3°	0.15
												ISSUE MARK

[illegible]