

DESCRIPTION



- Collector-Emitter Breakdown Voltage-
: $V_{(BR)CEO} = -50V(\text{Min.})$
- Good Linearity of h_{FE}
- Low Collector Saturation Voltage-
: $V_{CE(sat)} = -1.0V(\text{Max.}) @ I_C = -2A$
- Complement to Type 2SD1762

APPLICATIONS

- Power amplifier applications.
- Driver stage amplifier applications.

ABSOLUTE MAXIMUM RATINGS($T_a=25^\circ\text{C}$)

SYMBOL	PARAMETER	VALUE	UNIT
V_{CBO}	Collector-Base Voltage	-60	V
V_{CEO}	Collector-Emitter Voltage	-50	V
V_{EBO}	Emitter-Base Voltage	-5	V
I_C	Collector Current-Continuous	-3	A
I_{CM}	Collector Current-Peak	-4.5	A
P_C	Collector Power Dissipation @ $T_a=25^\circ\text{C}$	2	W
	Collector Power Dissipation @ $T_c=25^\circ\text{C}$	25	
T_J	Junction Temperature	150	$^\circ\text{C}$
T_{stg}	Storage Temperature Range	-55~150	$^\circ\text{C}$

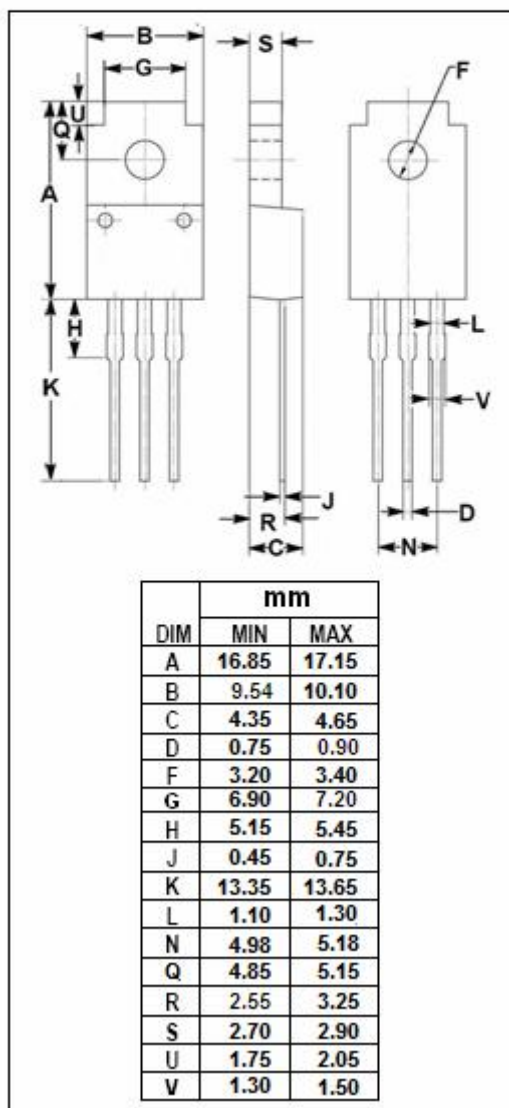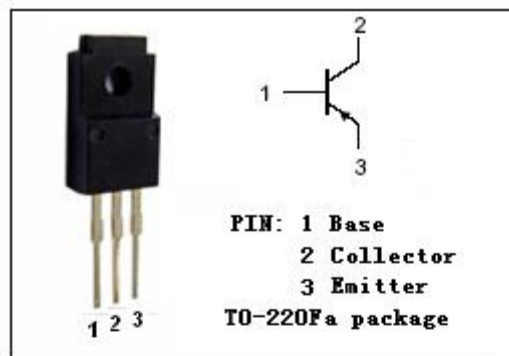

SPTECH Silicon PNP Power Transistor**2SB1185****ELECTRICAL CHARACTERISTICS****T_C=25°C unless otherwise specified**

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
V _{(BR)CEO}	Collector-Emitter Breakdown Voltage	I _C = -1mA; I _B = 0	-50			V
V _{(BR)CBO}	Collector-Base Breakdown Voltage	I _C = -50 μA; I _E = 0	-60			V
V _{(BR)EBO}	Emitter-Base Breakdown Voltage	I _E = -50 μA; I _C = 0	-5			V
V _{CE(sat)}	Collector-Emitter Saturation Voltage	I _C = -2A; I _B = -0.2A			-1.0	V
V _{BE(sat)}	Base-Emitter Saturation Voltage	I _C = -2A; I _B = -0.2A			-1.5	V
I _{CBO}	Collector Cutoff Current	V _{CB} = -40V; I _E = 0			-1	μA
I _{EBO}	Emitter Cutoff Current	V _{EB} = -4V; I _C = 0			-1	μA
h _{FE}	DC Current Gain	I _C = -0.5A; V _{CE} = -3V	60		320	
C _{OB}	Output Capacitance	I _E = 0; V _{CB} = -10V; f _{test} =1MHz		50		pF
f _T	Current-Gain—Bandwidth Product	I _E = 0.5A; V _{CE} = -5V; f _{test} = 30MHz		70		MHz

◆ **h_{FE} Classifications**

D	E	F
60-120	100-200	160-320