


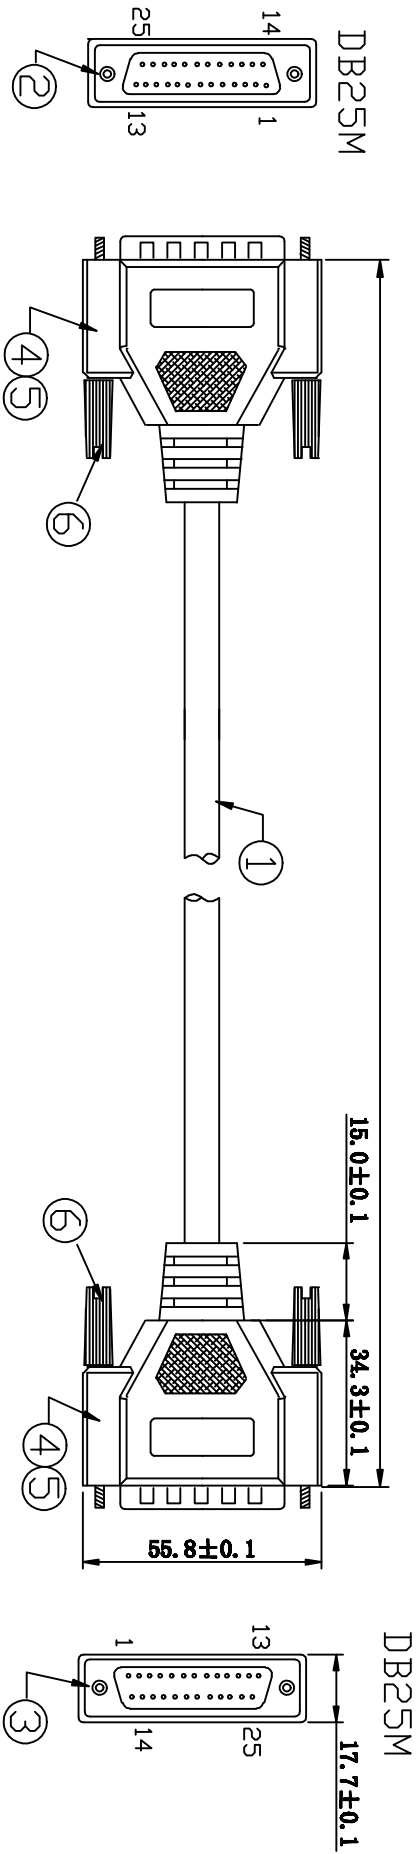

Connecting List:

Inspection And Testing:
1、Product must be 100% testin 4 times, No short、No Open Circuit、And No Dislocation
2、Electronics Testing: Insulation Resistance: $5M\Omega$
Conductor Resistance: 5Ω
Voltage Rating: 300V

Materral List:

Item	Part	Specifications	Unit	Q'TY
1	Cable	28# 25C+1+AL+B Black OD:8.0MM	PCS	1
2	Connector	DB25 Male	PCS	1
3	Connector	DB25 Male	PCS	1
4	InnerMolding	LDPE Transparent	Gram	
5	OuterMolding	45P PVC Black	Gram	
6	Screw	2.3*47	PCS	4

DB25M	DB25M	DB25M	DB25M
1	1	14	14
2	2	15	15
3	3	16	16
4	4	17	17
5	5	18	18
6	6	19	19
7	7	20	20
8	8	21	21
9	9	22	22
10	10	23	23
11	11	24	24
12	12	25	25
13	13	Shell	Shell

Customer No.:			
Customer sign.:			
Product Name:	DB25M/M		
Packing:	PE Bag/One PCS		
Drawing No.:		Proportion: 2.5:1	Edition: A1
Data:		Unit: MM	Confirm:
			Drawing By: Zhangwei
			Approval: