
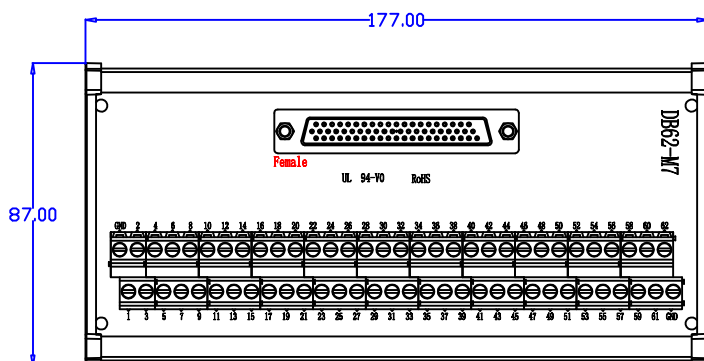


parameter table:

Num	Category	Describe
1	Max Current	0.8A
2	Cable gauge (AWG)	14-24 AWG
3	D_SUB connector:	冲针头 Stamp Pin
4	PCB Material	FR4
5	D_SUB Withstanding voltage	500V AC/MINUTE
6	D_SUB Operating temperature	-20℃ to 105℃
7	Rated voltage according to	UL:No
8	Rated current according to	UL:No
9	D_SUB Material:	INSULATOR:PBT 30%GF; CONTACT:COPPER ALLOY
10	Box size w/label	L200*W95*H55mm /
11	Packing	



Pin assignment

制作	Hero. Xu	日期	2020.05.27	名称	端子台	型号	DB62-M7
审核				版本	Ver:1.0	客户编号	
核准				摄影角度	图纸比例	第 1 张 共 1 张	
尺寸公差				角度公差		1:1	
公差				角度公差		±0.5°	
3-6	6-30	30-120	120-400	400-1000	1000-2000	2000-4000	
0.1	0.15	0.2	0.3	0.5	0.8	1.2	2.0
未注精度公差GB1804-m级(单位mm)				摄影角度		1:1	
						中山市肯博电子科技有限公司 www.kingpow.cn	