
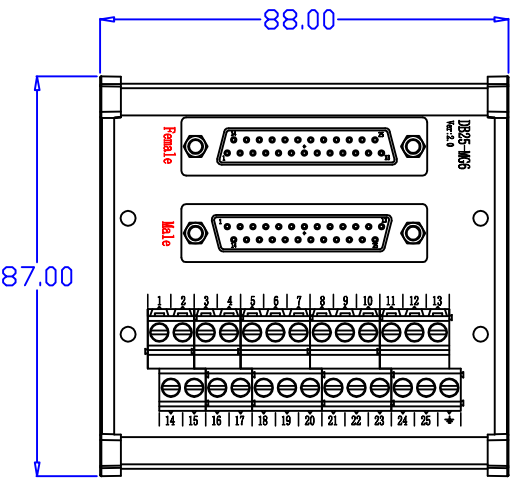


parameter table:

Num	Category	Describe
1	Max Current	0.7 A
2	Cable gauge (AWG)	18-26 AWG
3	D_SUB connector:	Rohs Pin
4	PCB Material	FR4
5	D_SUB Withstanding voltage	500V AC/MINUTE
6	D_SUB Operating temperature	-20℃ to 105℃
7	Rated voltage according to	UL:No
8	Rated current according to	UL:No
9	D_SUB Material:	INSULATOR:PBT 30%GF; CONTACT:COPPER ALLOY
10	Box size w/label	L115*W95*H54mm /
11	Packing	



Pin assignment

制作	Hero. Xu	日期	2022.09.13	名称	端子台	型号	DB25-MG6	
审核				版本	Ver:1.1	客户编号		
核准								
未注线性公差GB1804-m级（单位:mm）				摄影角度	图纸比例	第 1 张 共 1 张		
尺寸公差	≤3	3-6	6-30	30-120	120-400	400-1000	1000-2000	2000-4000
	0.1	0.15	0.2	0.3	0.5	0.8	1.2	2.0
角度公差 ±0.5°					1:1	中山市肯博电子科技有限公司 www.kingpow.cn		