

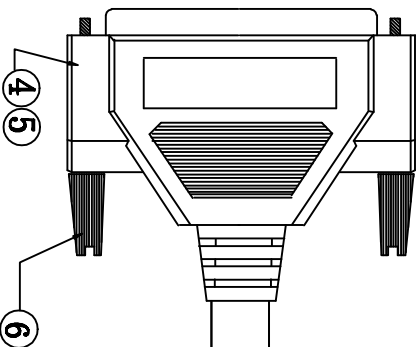


DB62 Female

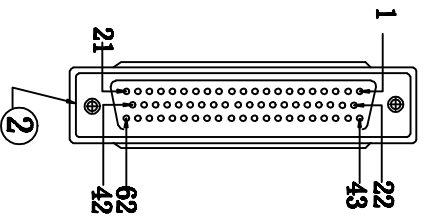

1

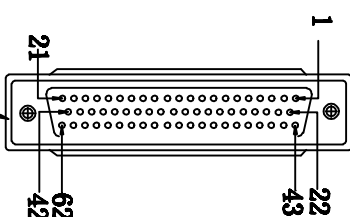

DB62 Female

Inspection And Testing:

- 1、Product must be 100% testin 4 times, No short、No Open Circuit、And No Dislocation
- 2、Electronics Testing :Insulation Resistance : 10M Ω
- Conductor Resistance : 3 Ω
- Voltage Rating : 300V

Material List:

Item	Part	Specifications	Unit	Q' TY
1	Cable	UL2919 28AWG 34P+1+B 黑色 OD:10.5	PCS	1
2	Connector	DB62Pin 母头, 黑胶, 传统焊线式	PCS	1
3	Connector	DB62Pin 母头, 黑胶, 传统焊线式	PCS	1
4	InnerMolding	LDPE Transparent	Gram	
5	OuterMolding	45P PVC 黑色	Gram	
6	Screw	2.3*47mm	PCS	4

Connecting List:

DB62F	DB62F	DB62F	DB62F	DB62F	DB62F	DB62F	DB62F
1	2	19	19	37	37	55	55
2	2	20	20	38	38	56	56
3	3	21	21	39	39	57	57
4	4	22	22	40	40	58	58
5	5	23	23	41	41	59	59
6	6	24	24	42	42	60	60
7	7	25	25	43	43	61	61
8	8	26	26	44	44	62	62
9	9	27	27	45	45	Shell	Shell
10	10	28	28	46	46		
11	11	29	29	47	47		
12	12	30	30	48	48		
13	13	31	31	49	49		
14	14	32	32	50	50		
15	15	33	33	51	51		
16	16	34	34	52	52		
17	17	35	35	53	53		
18	18	36	36	54	54		

Customer No:	
Customer sign:	
Product Name:	DB62F/F
Packing:	PS Bag/One PCS

	Proportion:	2.5:1	Edition:	A1	Drawing By: Zhangwei
	Unit:	MM	Confirm:		
Data:				Approval:	