

1

2

3

STD LIB-SW2016




SUB ASSEMBLY PART NO.	NO.	PART NAME	PART NO.	MATERIAL
7157-7897-60	①	REAR STOPPER	7157-7810-80	△ PBT-G (BROWN)
	②	SEAL RUBBER	—	SILICONE RUBBER (GREEN)

注記


- △ 1. 適用電線サイズ : CIVUS 0.35~0.75
IVSSH 0.35f~0.5f

NOTE

- △ 1. APPLICABLE WIRE SIZE : CIVUS 0.35~0.75
IVSSH 0.35f~0.5f

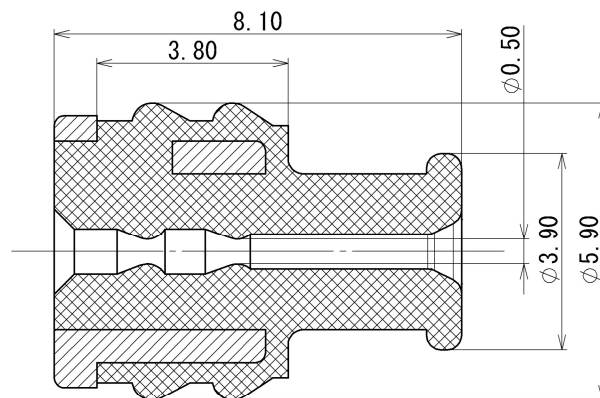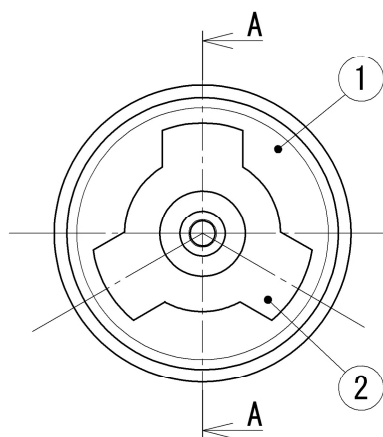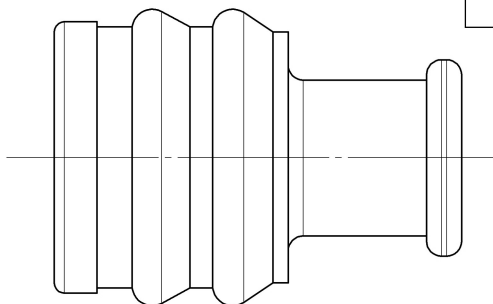

SEC. A-A

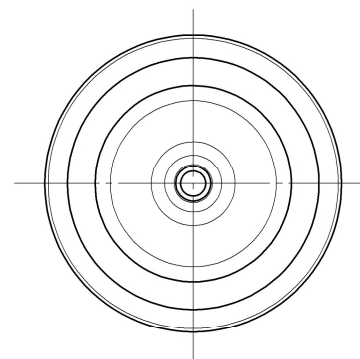

ISSUE MARK

△ 2018/09/10		ADDED APPLICABLE WIRE SIZE, ETC.		C18-P257		Y. M		CUSTOMER					MATL. SPEC.			SEE TABLE		TREAT. & FIN.				
△ 1994/11/07		CHANGED GENERAL TOLERANCE		C94-6509		K. O		CUSTOMER PART NO.					NAME △ SWP-TYPE SEAL RUBBER									
1988/08/20		NEW		8MC-1035		S. Y		CUSTOMER DWG NO.														
LET		DATE		REVISION RECORD		NO.		CHKD		OFFICE			TRIAL PART NO. or PRODUCT NO.			1P ASSEMBLY (極細用)						
										VENDOR			△									
△ GENERAL TOLERANCE								VENDOR NO.					PART NO. 7157-7897-60 CH. CODE DWG NO. 7157-7897-60:R YAZAKI Corporation									
	10MAX	50MAX	100MAX	250MAX	2500VR	ANGLE	ECCENT	DWG TYPE		DWG SOURCE		DWG DATE						UNIT	SCL	ANGLE		
A	±0.15	±0.2	±0.3	±0.5	±0.75	±0.5°	O. 1	R		NEW		1988/08/20						mm	10:1	3		
B	±0.2	±0.3	±0.55	±0.95	±1.4	±1.0°	O. 1	APPROVED		CHECKED		CHECKED						DESIGN		DRAWN		
△	±0.3	±0.5	±0.8	±1.4	±2	±1.5°	O. 15	N. TAGUCHI		K. FUKUDA								YAMADA		Y. MAEDA		
SPECIFIED						MASS		△ (0.2) g		2018/09/10		2018/09/10				1988/08/20		2018/09/10		SET DWG NO.		
																				A3		

1

2

3

A3